


DO NOT SCALE: CONTRACTOR TO CHECK ALL DIMENSIONS AND REPORT ANY OMISSIONS OR ERRORS TO MCE

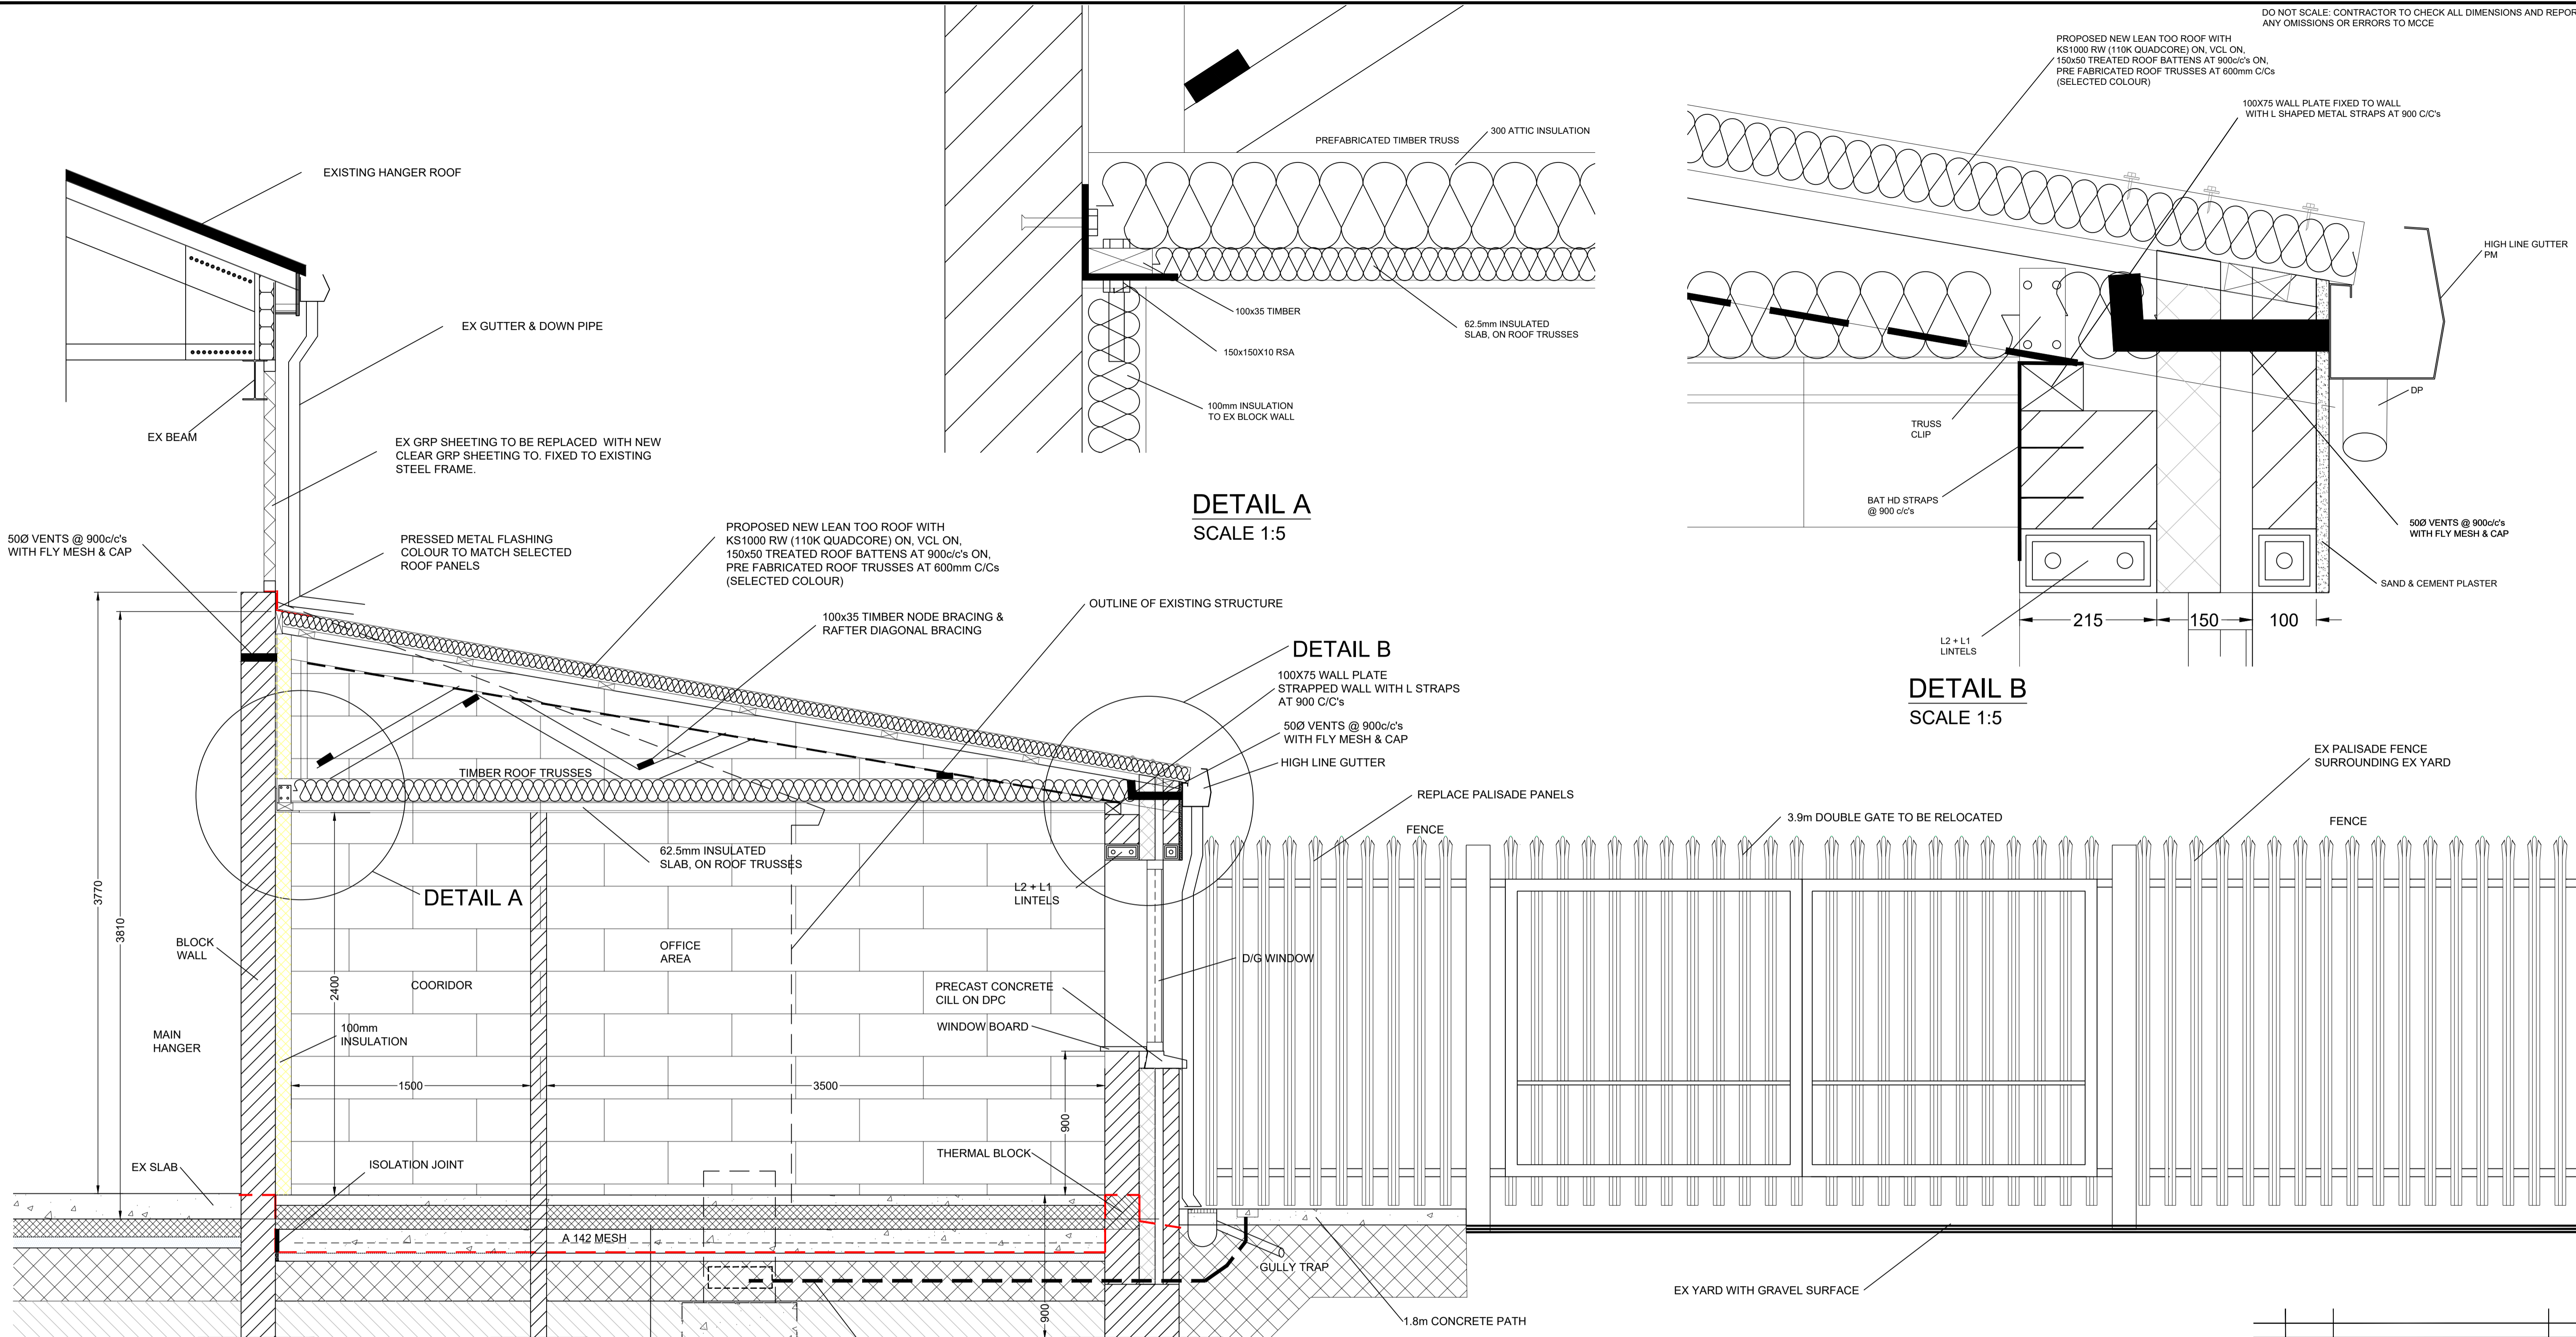

SECTION B-B
SCALE 1:20

DETAIL A
SCALE 1:5

DETAIL B
SCALE 1:5

TIMBER NOTES

GENERAL:
STRUCTURAL TIMBER SHALL COMPLY WITH I.S EN 1995-1-1:2004 (EUROCODE 5: DESIGN OF TIMBER STRUCTURES - GENERAL COMMON RULES AND RULES FOR BUILDINGS) + AC:2006 + A1:2008 + A2:2014, INCLUDING IRISH NATIONAL ANNEX-NA:2010. TIMBER TRUSSES FOR ROOFS SHALL COMPLY WITH I.S EN 1995-1-1:2004 AND S.R 70:2015.

SPECIALIST SUPPLIERS:
THE CONTRACTOR SHALL NOMINATE SPECIALIST SUPPLIERS FOR LAMINATED TIMBERS OR TRUSSED RAFTER AS APPLICABLE. THE APPOINTMENT OF THESE SUPPLIERS SHALL BE SUBJECT TO THE ENGINEERS APPROVAL.

TYPE & GRADE OF TIMBER USED:
TRUSSED RAFTERS & GENERAL STRUCTURAL TIMBER SHALL FALL WITHIN GROUP SPECIES SERVICE CLASS 3 IN ACCORDANCE WITH "TIMBER GRADES FOR STRUCTURAL USE" IRRESPECTIVE OF ANY OTHER GRADING CARRIED OUT AT SOURCE.

ALL STRUCTURAL TIMBER SHALL BE MIN. GRADE C16 TO I.S EN 338:2016 (STRUCTURAL TIMBER - STRENGTH CLASSES) (FORMERLY C16 TO I.S 444:1998, NOW WITHDRAWN), UNLESS NOTED OTHERWISE

MARKING OF TIMBER & CE MARKING:
THE SPECIES GROUP AND STRESS GRADE SHALL BE MARKED ON ALL TIMBER. ALL TIMBER RE-SAWN FROM STRESS GRADED STOCK SHALL BE REGRADED BEFORE USE.

IN ORDER TO COMPLY WITH THE CONSTRUCTION PRODUCTS REGULATIONS, ALL 'STRUCTURAL TIMBER PRODUCTS/ELEMENTS AND ANCILLARIES' AND 'WOOD BASED PANEL ELEMENTS' MUST ALSO INCORPORATE THE LETTERS CE.

DECLARATION OF PERFORMANCE:
MANUFACTURERS ARE REQUIRED TO PROVIDE A DECLARATION OF PERFORMANCE (DOP) FOR ALL STRUCTURAL TIMBER USED ON THE PROJECT, WHICH CONTAINS TECHNICAL INFORMATION TO DEMONSTRATE THE PRODUCT'S FITNESS FOR PURPOSE.

GENERAL NOTES

ALL DIMENSIONS AND LEVELS TO BE CONFIRMED ON SITE.

ALL LEVELS RELATE TO TBM 100.00m (EX. FFL)

ALL CONCRETE IS TO BE GRADE C30/37 U.N.O.

ALL LEAN MIX CONCRETE BLINDING IS TO BE GRADE C12/15.

CONCRETE TO BE PLACED IN ACCORDANCE WITH THE SPECIFICATIONS AND BS8110.

THE CONTRACTOR SHALL PROVIDE ALL NECESSARY TEMPORARY WORKS AND SHORING DURING THE COURSE OF THE WORKS.

THE DESIGN, INSTALLATION AND MAINTENANCE OF TEMPORARY WORKS SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR, UNLESS DETAILED IN THE DRAFT DRAWINGS.

STRENGTH OF ALL BLOCKWORK TO BE 7.5N U.N.O.

ALL LINTELS SHALL HAVE MINIMUM 225mm BEARING EACH SIDE OF OPE.

ALL STEEL BEAMS SHALL HAVE MINIMUM OF 250mm BEARING EACH SIDE OF OPE.

ALL DPM'S, DPC'S, INSULATION AND RADON DETAILS.

0	08/04/26	ISSUED FOR TENDER	AT
Rev.	Date	Amendment	By

Issued For:	TENDER
Project:	GORMANSTOWN CAMP HANGER LEAN TO NEW OFFICE BLOCK
Drawing Title:	SECTION B-B

CLIENT:
CAPTIAN CIARAN CAREY DEFENCE FORCES

MALACHI CULLEN
CONSULTING ENGINEERS LTD
8 CENTRE COURT, BLYVY BUSINESS & COMMERCIAL PARK, ATHLONE, CO. WESTMEATH N37 A710
T: 090 6420364 E: info@malachicullen.ie W: www.malachicullen.ie

SCALE @	A1 1:20	Drawing Number:	Rev.
DATE:	APRIL 2026	26-009 T-05	0
DRAWN:	A TROY		
CHECKED:	JD		