


DO NOT SCALE FROM THIS DRAWING. USE FIGURED DIMENSIONS IN ALL CASES.
VERIFY DIMENSIONS ON SITE AND REPORT ANY DISCREPANCIES TO THE DESIGNERS IMMEDIATELY.
THIS DRAWING TO BE READ IN CONJUNCTION WITH THE DESIGNERS SPECIFICATION.
© THIS DRAWING IS COPYRIGHT AND MAY ONLY BE REPRODUCED WITH THE DESIGNERS PERMISSION.

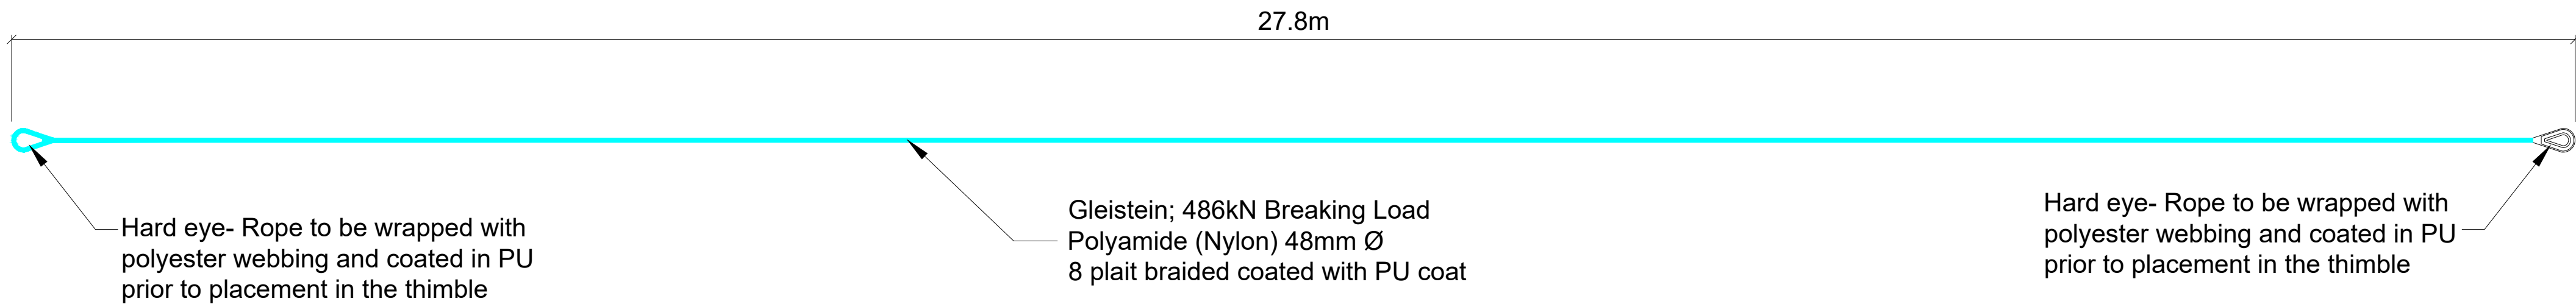

NUMBER OF ROPES REQUIRED:
LEG B 44 NO. AT 27.8 m
LEG C 38 NO. AT 31.5m.

Notes:

- Single strand splicing method to be used
- A 2T pretension is to be maintained on the rope during the application of the PU coating
- Refer to MIX INSTRUCTIONS FOR STANDARD POLYURETHANE AND EPOXY RESIN SYSTEMS
- Mix Ratio of the PU Coating as per product data spec sheet
- Coating should be applied in a dry and reasonably warm environment
- Due to the fast-curing properties of the product you would need to weigh out both components into one cup and hand mix ca. 100grams for a much shorter time ca. 30seconds.

P02	03.07.26		ISSUED FOR TENDER	SE	MOS
P01	28.05.26		ISSUED FOR TENDER	SE	MOS
REV	DATE		DESCRIPTION	BY	APP

PROJECT:
KNIGHTSTOWN HARBOUR

TITLE:
NYLON ROPE DETAILS

CLIENT:
KERRY COUNTY COUNCIL



DRAWN:	CHECKED:	APPROVED:
SE	MO	IB
PROJECT NUMBER:	DATE:	SCALE @ A1:
27335	28/05/26	As shown
STATUS DESCRIPTION:		STATUS:
FOR INFORMATION		S2

DRAWING NUMBER:	REV:
27335 - MWP -XX-XX-DR-C- 0004	P02