THIS DRAWING IS THE PROPERTY OF DELAP & WALLER AND MAY ONLY BE USED WITH THEIR WRITTEN APPROVAL.

DO NOT SCALE FROM THIS DRAWING.

## GENERAL NOTES.

THIS DRAWING TO BE READ IN CONJUNCTION WITH ALL OTHER RELEVANT DRAWINGS AND SPECIFICATIONS

ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE STATED.

THIS DRAWING IS NOT AN INSTALLATION DRAWING.THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE PRODUCTION OF FABRICATION AND INSTALLATION DRAWINGS, SHALL BE FAMILIAR WITH OTHER WORKS PACKAGES WHICH DIRECTLY INTERFACE WITH HIS PACKAGE AND COORDINATE WITH THE FABRICATION AND INSTALLATION DRAWINGS ACCORDINGLY.

THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE DESIGN, SUPPLY AND INSTALLATION OF SUPPORTS, BRACKETING SYSTEMS, AND SECONDARY STEELWORK SUPPORTS REQUIRED FOR THIS WORKS PACKAGE, UNLESS OTHERWISE STATED.

SHOULD ANY DISCREPANCIES BE APPARENT IN THIS DRAWING, THE ENGINEER SHALL BE MADE AWARE OF THIS FOR FURTHER ACTION.

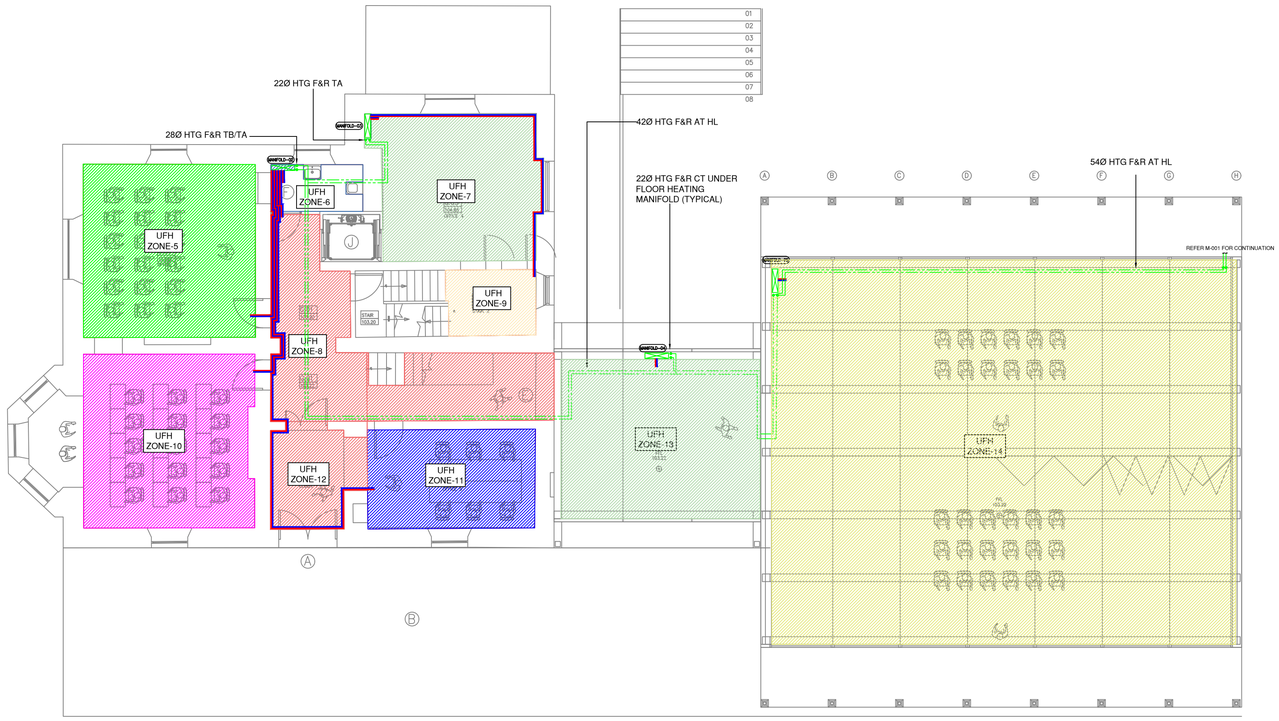


## LEGEND:

| | |
|---|---|
| | .PIPEWORK IN CEILING SPACE |
| | .PIPEWORK AT HIGH LEVEL |
| | .PIPEWORK AT LOW LEVEL |
| | .PIPEWORK IN FLOOR SCREED |
| F&R | :FLOW AND RETURN |
| DTLL | .DROP TO LOW LEVEL |
| TA | .TO ABOVE |
| FA | .FROM ABOVE |
| TB | .TO BELOW |
| TH | .TRENCH HEATER |
| RAD | .RADIATOR |
| UFH | .UNDER FLOOR HEATING |
| IV | :ISOLATING VALVE |
| TC | :DIGITAL THERMOSTAT CONTROLLER |
| T | .THERMOSTAT |
| TP | .TEMPERATURE PROBE |
| | :MANIFOLD |

## NOTES:

1. ALL RADIATORS TO BE CHECKED ON SITE PRIOR TO ORDERING TO ENSURE THAT THEY CAN BE ACCOMMODATED WITHIN THE SPACE PROVIDED.
2. CONSULT ARCHITECT TO CONFIRM FINAL AGREED LOCATIONS OF RADIATORS.
3. FOR SCHEDULE OF RADIATORS SEE SPECIFICATION.
4. MANUAL AIR VENTS TO BE FITTED AT ALL HIGH POINTS OF EACH SYSTEM. FINAL LOCATION TO BE AGREED WITH ENGINEER. ALL TO BE ACCESSIBLE.
5. DRAIN OFF COCKS TO BE FITTED AT ALL LOW POINTS OF EACH SYSTEM. FINAL LOCATION TO BE AGREED WITH ENGINEER. ALL TO BE ACCESSIBLE.
6. ALL RADIATORS TO BE COMPLETE WITH THERMOSTATIC RADIATOR VALVES AS PER SPECIFICATION.
7. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL THE RELEVANT SECTIONS OF THE SPECIFICATION AND THE DETAIL SHEETS.
8. ALL PIPEWORK TO BE INSULATED AS PER SPECIFICATION.
9. ALL COORDINATION WITH ELECTRICAL SERVICES SHALL BE THE RESPONSIBILITY OF THE MECHANICAL CONTRACTOR.
10. REFER TO TYPICAL SCHEMATIC FOR FURTHER DETAILS.
11. ALL PIPEWORK FEEDING RADIATORS SHALL HAVE A PROTECTIVE SLEEVE FINISH PRIOR TO FINAL CONNECTION TO RADIATOR. REFER TO DETAIL.
12. WHERE RADIATORS ARE POSITIONED ON STUD PARTITIONS (NON-MASONARY) SUITABLE PLYWOOD GROUNDS SHALL BE USED.
13. IF, AT ANY STAGE, A LENGTH OF PIPEWORK SHOULD BECOME DAMAGED, THEN THE ENTIRE LENGTH OF THE PIPEWORK SHALL BE REPLACED. THE UNDERFLOOR HEATING SYSTEM SHALL BE FULLY COMMISSIONED AND BALANCED BY THE UNDERFLOOR HEATING SPECIALIST CONTRACTOR.

| REV | BY | DESCRIPTION | DATE |
|---|---|---|---|
| T01 | DP | ISSUED FOR TENDER | 22.08.2025 |
| T | JW | ISSUED FOR TENDER | 05.06.2025 |

**PROJECT:**
22195
DAN BREEN HOUSE
TIPPERARY

Delap & Waller
www.delapandwaller.com
info@delapandwaller.com
☐ Antrim: T +44 (0) 28 9448 3800
☑ Dublin: T +353 (0) 1 535 5900
☐ London: T +44 (0) 20 8059 7373

**CLIENT:**
TIPPERARY COUNTY COUNCIL
NORTH TIPPERARY CIVIC OFFICES, LIMERICK ROAD, KNOCKANPIERCE, NENAGH, CO. TIPPERARY

**ARCHITECT:**
ROBIN LEE ARCHITECTURE

| | | |
|---|---|---|
| **SCALE AT A1:** 1:100 | **CHK:** JW | **APP:** JW |
| | **DES:** SVB | **DRW:** SVB |

**WORK PACKAGE:**
M&E DESIGN

**DRAWING TITLE:**
HEATING SERVICES LAYOUT - GROUND FLOOR

**DRAWING NUMBER:**
22195-L00-DR-DLW-M-101

**STATUS:** TENDER
**REV:** T01