


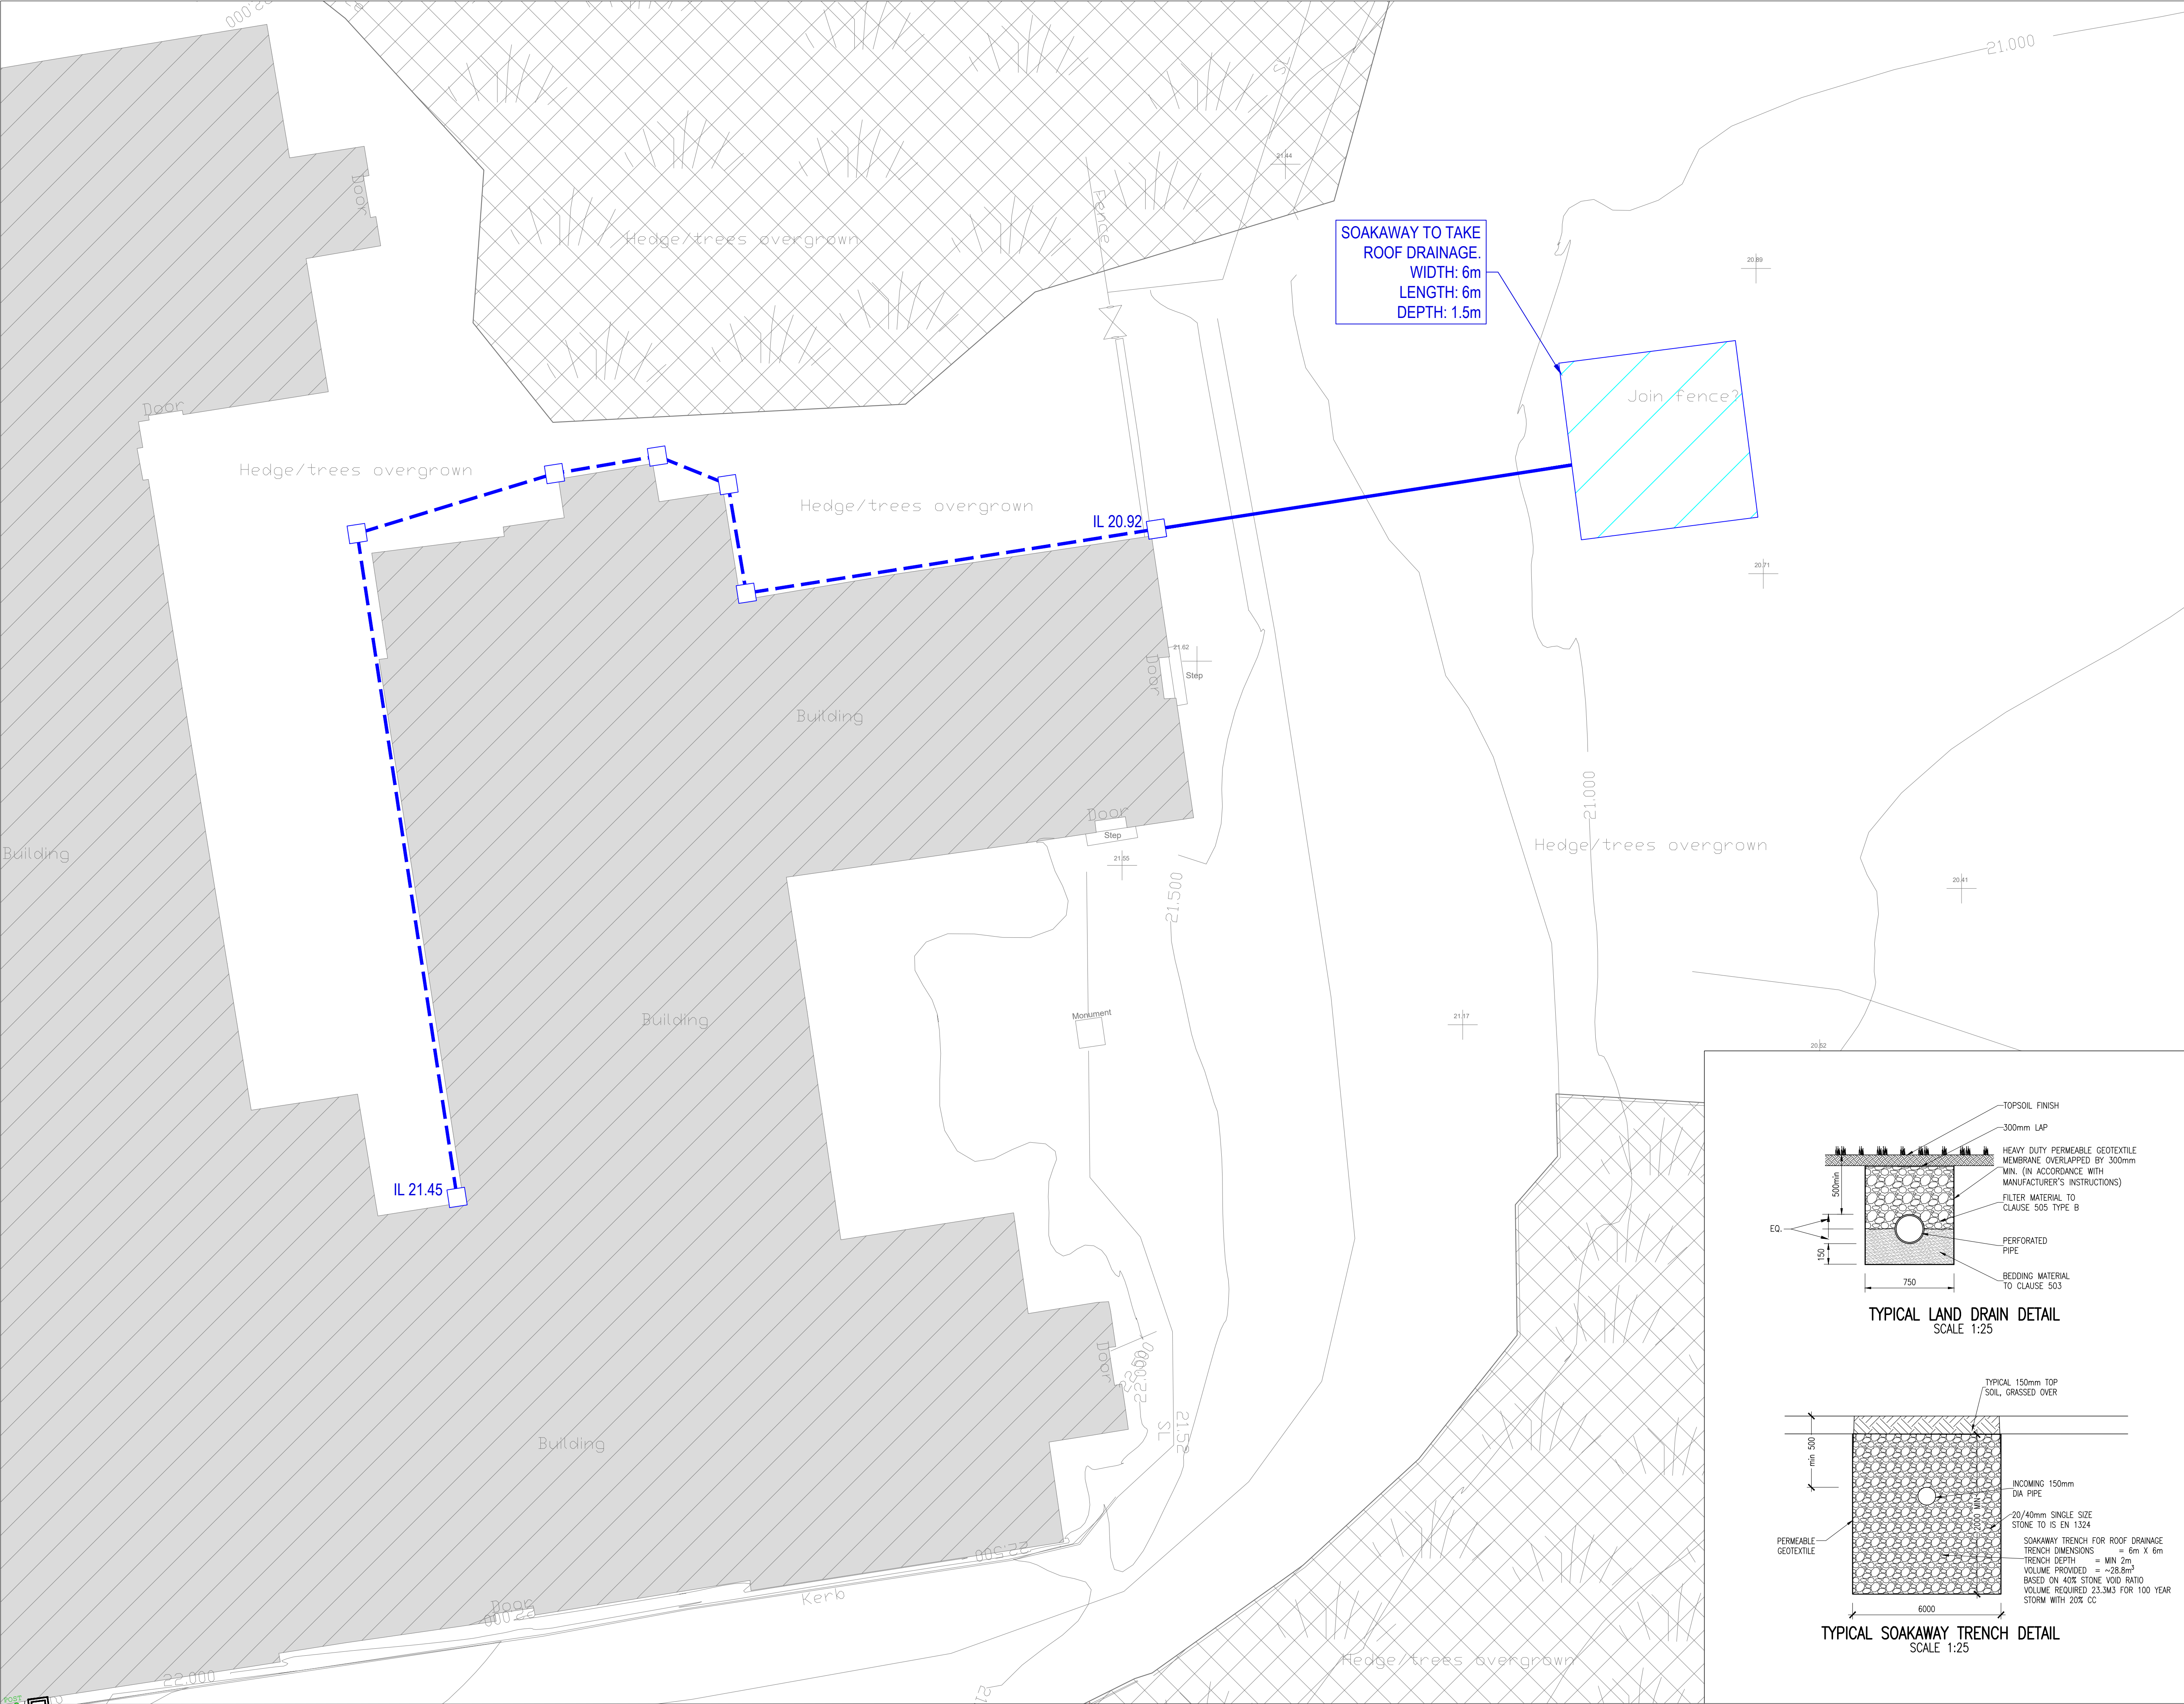

ON ORIGINAL

© COPYRIGHT OF THIS DRAWING IS RESERVED BY DBFL CONSULTING ENGINEERS. NO PART SHALL BE REPRODUCED OR TRANSMITTED WITHOUT THEIR WRITTEN PERMISSION.

NO CHANGES OF WHATSOEVER NATURE ARE TO BE MADE TO ANY DETAILS SET OUT OR CONTAINED IN ANY DBFL SPECIFICATIONS OR DRAWINGS UNLESS THE EXPRESS CONSENT HAS BEEN OBTAINED IN ADVANCE, IN WRITING, FROM DBFL.

NOTES:

GENERAL NOTES:

1.

ALL WORKS SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE WORKS REQUIREMENTS.

2.

ALL DIMENSIONS IN METRES UNLESS SPECIFIED OTHERWISE.

3.

ALL CO-ORDINATES ARE TO IRISH TRANSVERSE MERCATOR.

4.

ALL LEVELS ARE TO ORDNANCE DATUM (MALIN HEAD).

5.

ALL TEMPORARY TRAFFIC & OPERATIONS MANAGEMENT SHALL COMPLY FULLY WITH THE WORKS REQUIREMENTS.

6.

THE CONTRACTOR MUST LIASE DIRECTLY WITH LOCAL AUTHORITY DEPARTMENTS AS DIRECTED IN THE WORKS REQUIREMENTS.

7.

ALL VEHICULAR & PEDESTRIAN, CYCLE & PRIVATE ACCESS ROUTES WITHIN AND SURROUNDING THE WORKS EXTENTS MUST BE MAINTAINED THROUGHOUT THE WORKS IN ACCORDANCE WITH THE CONTRACTORS APPROVED TEMPORARY TRAFFIC & OPERATIONS MANAGEMENT PLAN.

DRAWING SPECIFIC NOTES:

1.

ALL DRAWINGS TO BE CHECKED BY CONTRACTOR ON SITE AND ENGINEER INFORMED OF DISCREPANCIES BEFORE WORK COMMENCES.

2.

CONTRACTOR SHALL SATISFY HIMSELF AS TO THE ACCURACY OF EXISTING DRAINAGE LEVELS & SERVICES ON SITE PRIOR TO COMMENCEMENT OF WORKS ON SITE.

3.

ALL WORKS TO BE CONSTRUCTED IN ACCORDANCE WITH THE NRA SPECIFICATION FOR ROAD WORKS UNLESS NOTED OTHERWISE.

4.

MANHOLE COVER LEVELS ARE TO CONFORM WITH FINISHED ROAD AND PATH LEVELS.

5.

ALL DRAINAGE TO BE AS PER THE LOCAL AUTHORITY CODE OF PRACTICE FOR DRAINAGE WORKS/LOCAL AUTHORITY & IRISH WATER REQUIREMENTS.

6.

WHERE COVER TO PIPE IS LESS THAN 1200mm (ROAD/PATH/VERGE) OR 900mm (OPEN SPACE): SURROUND PIPE IN MINIMUM 150mm CONCRETE AS STD-WW-08.

7.

ALL EXTERNAL COLLECTOR DRAINS TO BE MINIMUM 150 mm DIA.

8.

ALL FOUL SEWERS TO BE uPVC TO EN1401.

9.

ALL SURFACE WATER SEWERS TO BE uPVC TO EN1401 UNLESS INDICATED OTHERWISE.

10.

THIS DRAWING IS FOR PLANNING PURPOSES ONLY.

11.

CONTRACTOR SHALL INSPECT THE ROUTE & CONFIRM LOCATIONS OF ALL TREES, FEATURES, ENTRANCES & ASPECTS IMPACTING CONSTRUCTION OF THE WORKS.

12.

GREEN ROOFS SHALL BE PROVIDED WITH A 1m WIDE GRAVEL FIRE BREAK EVERY 40m.

13.

GRAVEL STRIPS MUST BE PROVIDED AROUND ALL STRUCTURES PENETRATING THE ROOF.

LEGEND

SITE BOUNDARY

EXISTING SURFACE WATER SEWER

PROPOSED SURFACE WATER SEWER

PROPOSED SURFACE WATER ACCESS JUNCTION (AJ)

PROPOSED GULLY

PROPOSED LINEAR SLOT DRAIN TYPE ACO

PROPOSED SOAKAWAY

PROPOSED FILTER DRAIN

0	01-07-26	ISSUE		JLB	NJF
rev	date	description		by	chkd.

STATUS CODES

purpose

P1 - INFORMATION

acceptance

S - ISSUED

T: + 353 1 400 4000 | E: info@dbfl.ie | W: www.dbfl.ie

DUBLIN | CORK | GALWAY | WATERFORD

project ref.

SACRED HEART SECONDARY SCHOOL

drawing title

FRENCH DRAIN

client

KELLY BARRY O'BRIEN WHELAN

designed by	author	scale	value	sheet size
NF	GS		VALUE	A1

drawing no.

220056-X-05-Z00-DTM-SK-DBFL-CE-1303

revision

0