

- GENERAL NOTES**
1. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL RELEVANT ENGINEERS, ARCHITECTS AND SERVICE ENGINEERS DRAWINGS AND SPECIFICATION.
 2. DO NOT SCALE USE FIGURE DIMENSIONS ONLY.
 3. ALL LEVELS ARE STRUCTURAL UNLESS NOTED OTHERWISE.
 4. ALL DRAWINGS TO BE CHECKED BY THE CONTRACTOR PRIOR TO THE COMMENCEMENT OF WORKS AND PRIOR TO COMMENCEMENT OF ANY MATERIALS BEING ORDERED AND ANY DISCREPANCIES TO BE BROUGHT TO THE ATTENTION OF THE DESIGNERS IMMEDIATELY.
 5. THE CONTRACTOR IS RESPONSIBLE FOR THE TEMPORARY SUPPORT OF ALL WORK.
- ALL FILL MATERIAL TO COMPLY WITH SPECIFICATION FOR ROAD WORKS SERIES 800 (NRA)
- ALL EXCAVATIONS AND ROCK BREAKING TO BE CARRIED OUT IN STRICT ACCORDANCE WITH THE SPECIFICATION AND IN STRICT ACCORDANCE WITH SERIES 600, SPECIFICATIONS FOR ROADWORKS AS PUBLISHED WITH THE NRA



CONTRACTOR TO ALLOW FOR SUPPLY, FITTING, AND CONNECTION TO NEW ESB MINI-PILLAR / JUNCTION BOX AND BACK TO EXISTING SCHOOL SERVICES.

CONTRACTOR SHOULD ALSO ALLOW FOR 2 No. 125mm DUCTS AROUND PERIMETER OF PROPOSED WALKING TRACK AND CONNECTION BACK TO SCHOOL SERVICES.

ASSOCIATED ESB CONNECTION FEES ARE TO BE INCLUDED BY CONTRACTOR.

LIGHTING TO CONSIST OF 12 X SPORTSLITE 12 1200W LED ASYMMETRIC 3 MOUNTED ON 6 X NEW 15M COLUMNS. (2 FITTINGS ON EACH OF THE COLUMNS).


THE AVERAGE LIGHT LEVEL IS 202 lux WITH 0.66 UNIFORMITY. THIS COMPLIES WITH CIBSE RECOMMENDATIONS FOR CLASS II FOR SOCCER AND GAELIC FOOTBALL (200 lux MINIMUM, 0.6 UNIFORMITY)

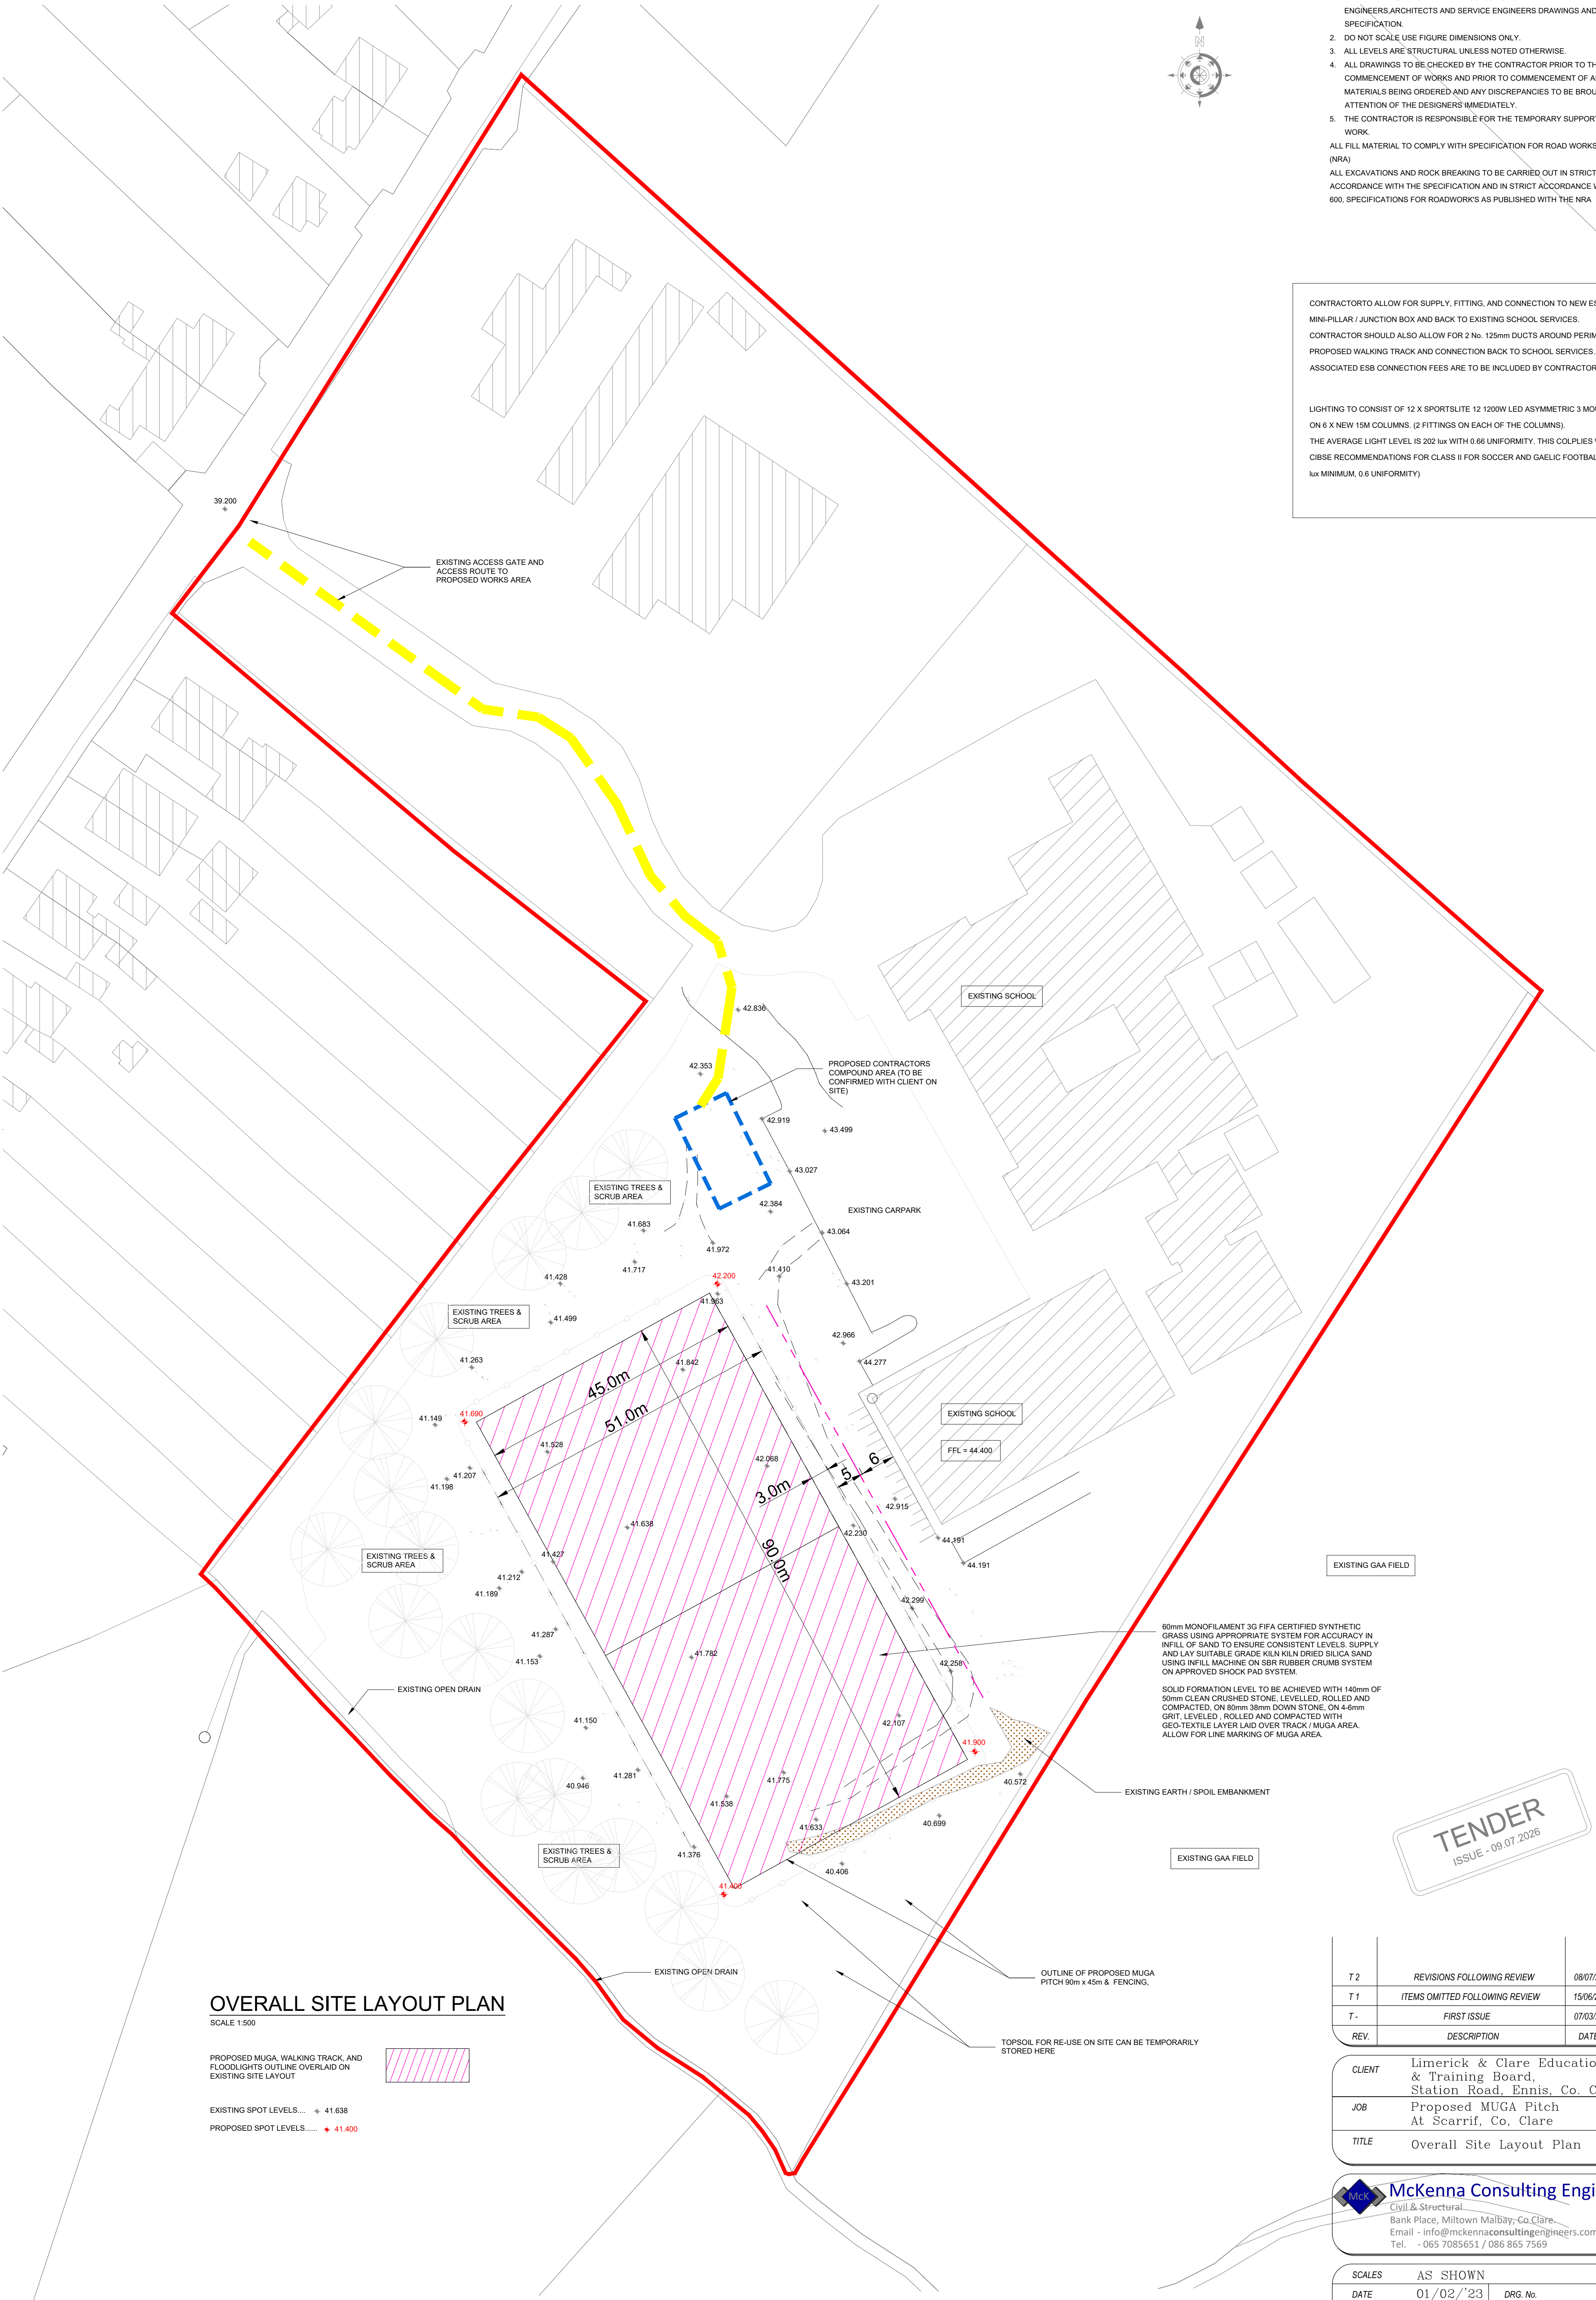

OVERALL SITE LAYOUT PLAN

SCALE 1:500

PROPOSED MUGA, WALKING TRACK, AND FLOODLIGHTS OUTLINE OVERLAIN ON EXISTING SITE LAYOUT



EXISTING SPOT LEVELS..... + 41.638
PROPOSED SPOT LEVELS..... + 41.400

60mm MONOFILAMENT 3G FIFA CERTIFIED SYNTHETIC GRASS USING APPROPRIATE SYSTEM FOR ACCURACY IN INFILL OF SAND TO ENSURE CONSISTENT LEVELS. SUPPLY AND LAY SUITABLE GRADE KILN DRIED SILICA SAND USING INFILL MACHINE ON SBR RUBBER CRUMB SYSTEM ON APPROVED SHOCK PAD SYSTEM.

SOLID FORMATION LEVEL TO BE ACHIEVED WITH 140mm OF 50mm CLEAN CRUSHED STONE, LEVELLED, ROLLED AND COMPACTED, ON 80mm 38mm DOWN STONE, ON 4-6mm GRIT, LEVELLED, ROLLED AND COMPACTED WITH GEO-TEXTILE LAYER LAID OVER TRACK / MUGA AREA. ALLOW FOR LINE MARKING OF MUGA AREA.

TENDER
ISSUE - 09.07.2026

T 2	REVISIONS FOLLOWING REVIEW	08/07/26	JS
T 1	ITEMS OMITTED FOLLOWING REVIEW	15/06/26	JS
T -	FIRST ISSUE	07/03/26	JS
REV.	DESCRIPTION	DATE	BY

CLIENT	Limerick & Clare Education & Training Board, Station Road, Ennis, Co. Clare.
JOB	Proposed MUGA Pitch At Scarriff, Co. Clare
TITLE	Overall Site Layout Plan

McKenna Consulting Engineers
Civil & Structural
Bank Place, Miltown Malbay, Co. Clare.
Email - info@mckennaconsultingengineers.com
Tel. - 065 7085651 / 086 865 7569

SCALES	AS SHOWN	
DATE	01/02/23	DRG. No.
DRAWN	JS	25226/CE/001/T2
CHECKED	SC	
APPROVED	TMcK	