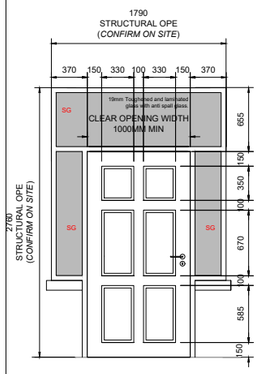





	DOOR TYPE - 1	DOOR TYPE - 2	DOOR TYPE - 3
ELEVATIONS:			
PLAN DIMENSIONS:			
DOOR NUMBERS:	DE 01	DG 02	DG 03
DOOR LOCATION:	ENTRANCE DOOR	INTERNAL	INTERNAL
MATERIAL:	COMPOSITE	SOLID CORE DOOR PANELED PRIMED & PAINTED	SOLID CORE DOOR PANELED PRIMED & PAINTED
EXISTING R.C. WALL:			
VISION PANELS:	YES SAFETY GLASS	NO	NO
ACCESS CONTROL:	NO	NO	NO
FIRE DOOR INFO:			
FIRE RATING:	NO	30 MINUTE DOOR	30 MINUTE DOOR
SELF CLOSER (S):	YES	YES	YES
INTUMESCENT STRIPS:	YES	YES	YES
SMOKE SEALS:	YES	YES	YES
FIRE DOOR SIGNAGE:	YES	YES	YES
FIRE DOOR IDENTIFICATION:	YES	YES	YES
IRONMONGERY:			
PULL BAR AND PUSH PLATE	NO	NO	NO
DOOR HANDLE	YES ACCORDING TO MANUFACTURE	YES NO.2 PROLINE JMB400 Nero Mitred Knurled Black Door Handle	YES NO.2 PROLINE JMB400 Nero Mitred Knurled Black Door Handle
LOCK	*ACCESS CONTROL - ABLOY	YES	YES
KICK PLATE (BOTH SIDES)	NO	NO	NO
HINGES	6 NO.	3 NO.	3 NO.
DOOR STOP	1 NO.	1 NO.	1 NO.
OVERHEAD DOOR CLOSER	1 NO Black.	1 NO Black.	1 NO Black.
AUTOMATED	AUTOMATED DOOR ACCESS	NO	NO
ADDITIONAL SIGNAGE	NO	DOOR NUMBER, KEEP SHUT	DOOR NUMBER, KEEP SHUT
ESCUTCHEON / THUMBTURN	NO	YES PROLINE Nero	YES PROLINE Nero
FLUSH BOLTS	NO	NO	NO

*ABLOY LOCKS TO BE FITTED & CERTIFIED BY AN ABLOY APPOINTED SPECIALIST

SPECIFICATION

LIME PLASTER
LIME PLASTER SHOULD BE USED FOR ANY REMEDIAL WORKS
50MM DEPTH SAINT ASTIERS NHL 3.5 SIMILAR OR APPROVED LIME TO BE USED IN A 1:2 RATIO, WITH WELL GRADED SHARP SAND OF 3.5 MM APPLIED IN THREE COATS AND PAINTED WITH A BREATHABLE PAINT TO SELECTED COLOUR

NEW WINDOW BLIND
1 NEW WINDOW BLIND
TO MATCH EXISTING
TO WINDOWS
LOCATION
WG-03

NEW & EXISTING SKIRTING
ALL EXISTING SKIRTING TO BE RETAINED IN ORDER TO MATCH NEW.
NEW SKIRTING SHOULD BE OAK PRIMED & PAINTED TO MATCH EXISTING ALLOW FOR 25M.

NEW STUD PARTITION
SEE DETAILS, ALL NEW STUD PARTITIONS TO BE PACKED WITH 50MM ISOVAR ACOUSTIC ROLL INSULATION SIMILAR OR APPROVED SECURED WITH INTELLIGENT HYDROSAFE AIRTIGHT VAPOUR CONTROL MEMBRANE TAPED WITH PRO CLIMA TESCON VANA TAPE SIMILAR OR APPROVED WITH12.5 GYPROC FIRELINE PLASTER BOARD TO EACH FACE, TAPED AND SKIMMED PLASTER AND PAINTED WITH A BREATHABLE PAINT TO ARCHITECTS COLOUR CHOICE.

NEW FIRE DOORS
NEW FIRE DOORS.
SEE DOOR SCHEDULE

CEILINGS:
METAL FRAME MF5 WITH 15MM GYPROC FIRELINE OR EQUAL APPROVED GYPSUM PLASTERBOARD WITH SKIM AND PAINTED FINISH. TO G-001 & G-002


RECESSED MATTING
BARRIER MATTING SYSTEMS - GRADUS ESPLANADE 9000 DOUBLE WIPER18MM BARRIER MATTING WITH WIPER COLOUR BLACK - CALCULUS RECESSED WITH A RECESSED MATWELL FRAME, TRIMMING EDGE STRIP AND SUPPORTS, SIMILAR OR APPROVED BY ARCHITECT – FITTING AS PER MANUFACTURER'S INSTRUCTIONS

WALLS:
ALL WALLS SHOULD BE AND PREPARED SANDED FILLED AND SMOOTH TO TOUCH BEFORE RECEIVING 2 COATS OF BREATHABLE PAINT TO SELECTED COLOUR .


FLOORS:
ALL FLOORS SHOULD BE AND PREPARED & LEVELED TO RECEIVE SELECTED FLOOR FINISH.




Staff side of counter



New front door with side lights and over head fanlight

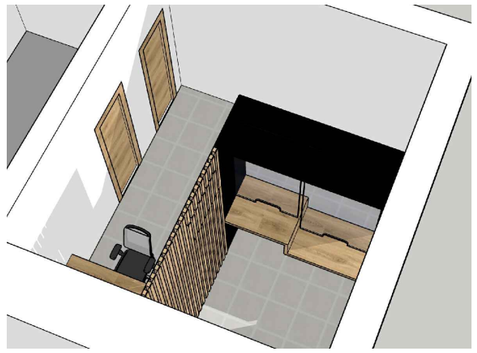

Over view of new counter

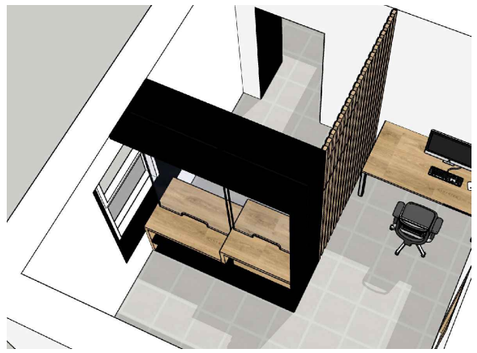

OPW Oifig na nOibreacha Poiblí Office of Public Works

Office of Public Works
a: Jonathan Swift Street, Trim, Co. Meath, C15 NX36
t: 046 942 2000
w: www.gov.ie/opw

OPW Property Maintenance
Michael Flynn - Regional Manager / Senior Architect
Anita Morrissey - Architect
Alex Devereux / Susan Byrne - Architectural Assistant
Gerard Horan - District Inspector
Margaret Kelleher - Clerical Officer

Drawing Revision:

Revision	Date	By	Chk'd	Description

Project Title:
Ferbane Garda Station,
Main Street, Ferbane,
Co. Offaly, R42 RP70

Drawing Title:
Door Schedule

Project Role: Tender Drawings			OPW Section Project Reference: B1289
Scales at A3: 1:50			
Drawn: A.Morrissey	Checked: M.Flynn	Approved: M.Flynn	Date: 29/06/2026
Status Description: TENDER		Status Code: -	Revision: -

Drawing Number:
B1289-210001-10

Do Not Scale

© Office of Public Works