


NOTE ON WALLS THAT RISE ABOVE THE TILING DATUM:

ALL WC/SOWER BLOCK WALLS SHOWN ON THIS PLAN ARE TO BE TAKEN UP TO THE TILING DATUM LEVEL OF + 6.8536m.

REFER TO THE REFLECTED CEILING DRAWING (DRW.4000) FOR THE SETOUT OF ALL WALLS ABOVE THE TILING DATUM LEVEL OF +6.8536m.

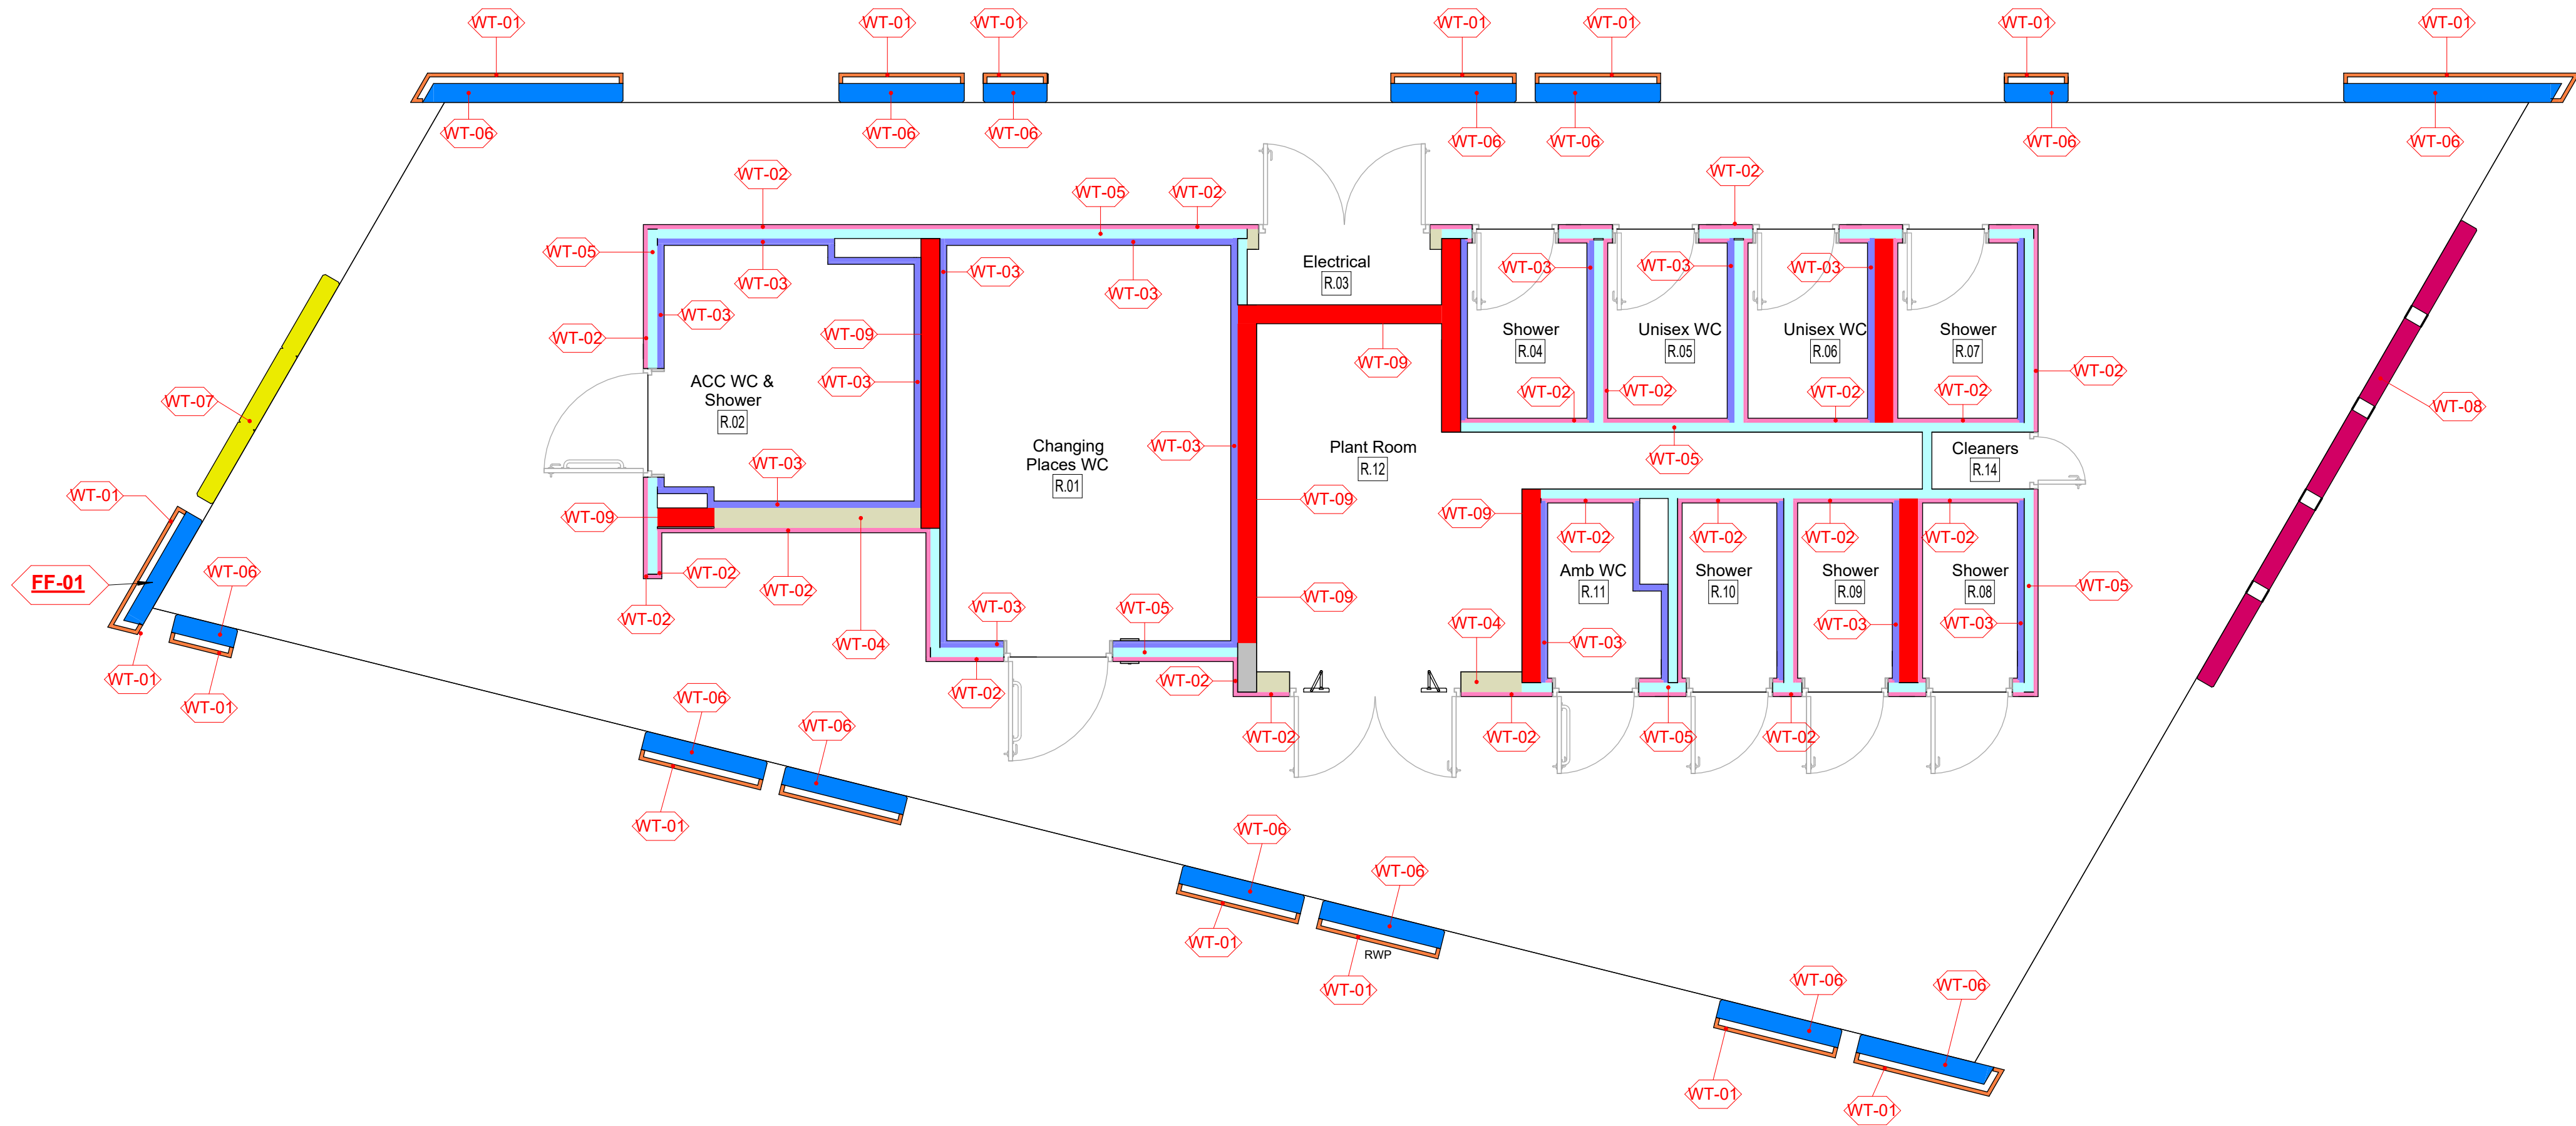

1 WALL TYPES PLAN
Scale 1 : 50 @A1

NOTE:
Dimensions not to be scaled from drawing.
For any discrepancies found consult with design office.
Copyright © - Cork County Council Architect's Dept.
This drawing to be read in conjunction with all the Specification Documents.

WALL TYPES LEGEND

- WALL TYPE: WT-01**
3mm CORTEN EFFECT ANODISED ALUMINIUM CLADDING PANELS SECRET FIXED BACK ONTO HORIZONTAL SUPPORT RAILS FIXED BACK TO RC COLUMNS. ANODISED ALUMINIUM (CORTEN EFFECT FINISH) MANUFACTURED USING 2.0 MM TO 3.0 MM SOLID ALUMINIUM (1050-H14 OR J57S GRADE). ALUMINIUM ALLOY GRADE TO BS EN 573-3, GRADE EN AW-5005. TEMPER TO BS EN 515, H14.
- WALL TYPE: WT-02**
1 NO. 12.5mm GYPROC H TILEBACKER BOARD ONE SIDE OF GYPFRAME 25mm TOP HAT AT 600mm C/C TO BLOCKWORK WALL TO ENGINEERS DETAILS
- WALL TYPE: WT-03**
1 NO. 12.5mm GYPROC H TILEBACKER BOARD ONE SIDE OF GYPFRAME 50mm TOP HAT AT 600mm C/C TO BLOCKWORK WALL TO ENGINEERS DETAILS
- WALL TYPE: WT-04**
215mm BLOCKWORK WALL TO ENGINEERS DETAILS
- WALL TYPE: WT-05**
100mm BLOCKWORK WALL TO ENGINEERS DETAILS
- WALL TYPE: WT-06**
200mm REINFORCED CONCRETE COLUMNS TO ENGINEERS DETAILS. 2x20mm CHAMFER TO ALL INTERNAL EDGES OF RC COLUMNSEXCEPT FOR NONE CLAD WALLS
CON-3: CONCRETE FINISH
- WALL TYPE: WT-07**
WESTERN GABLE WALL
200mm REINFORCED CONCRETE WALL WITH VERTICAL 20X20mm TRIANGULAR REVEALS ON BOTH SIDES, FORMED BY PROPRIETARY PVC FILLET SECURELY FIXED TO CONCRETE FORMWORK. ALL FILLETS TO BE PRECISELY MITRE CUT WHERE REBATES INTERSECT. ALL TEMPORARY WORKS TO CONTRACTORS DESIGN.
CON-3: CONCRETE FINISH
- WALL TYPE: WT-08**
EASTERN GABLE WALL (SHOWER WALL)
200mm REINFORCED CONCRETE WALL WITH VERTICAL 20X20mm TRIANGULAR REVEALS ON BOTH SIDES, FORMED BY PROPRIETARY PVC FILLET SECURELY FIXED TO CONCRETE FORMWORK. ALL FILLETS TO BE PRECISELY MITRE CUT WHERE REBATES INTERSECT. 3No. 100X100X224mm SERVICE VOIDS, FRONT TO BACK, CAST INTO RC WALL TO ALLOW EXTERNAL SHOWERS AND FOOT WASH PIPEWORK. COVER PLATE TO BE SECRET FIXED SELECTED 2mm SS STEEL.
ALL TEMPORARY WORKS TO CONTRACTORS DESIGN
CON-3: CONCRETE FINISH
- WALL TYPE: WT-09**
200mm REINFORCED CONCRETE SPINE WALL TO ENGINEERS DETAILS

NOTE:
SELECTED 100X100X10mm PORCELAIN TILE. TILE FINISH ON 12.5mm TILE BACKER BOARD WITH SELECTED APPROVED ALUMINUM BOX TILE TRIM TO THE PERIMETER OF ALL TILED SURFACES. 2.4mm JOINT SIZE TO BE DETERMINED ON SITE TO ELIMINATE / MINIMIZE CUT TILES IN HORIZONTAL DIMENSION. SETTING OUT TO PROVIDE FOR NO CUT TILES IN VERTICAL DIMENSION. SELECTED APPROVED HIGH QUALITY COLORED EPOXY GROUT FOR WALL TILES TO EN 13888. DETAILED SUBMITTAL FOR ALL COMPONET PARTS AND 1mX1m SAMPLE PANEL REQUIRED WITH SELECTED GROUT AND TRIM.

T.	TENDER ISSUE	13.07.2026
Rev	Description	Date
Revision		

Project Stage: **TENDER**

Comhairle Contae Chorcaí

Roinn na nAilíirí
Seachadadh Gaipillí
Halla an Chontae | Corcaigh | T12 R2NC | Éire
An Máltrú Contae | Marcus O'Colleáin

Cork County Council

Architect Department
Capital Delivery Directorate
County Hall | Cork | T12 R2NC | Ireland
County Architect | Mark Collins
T +353-021 428 5430 | architects@corkcoco.ie | www.corkcoco.ie



Protect Title: **Claycastle Watersports Facility**
Youghal Co. Cork

Drawing Title:
WALL TYPES

Design Team: Cork County Council Architects Department Capital Delivery	Date: Jan 2023 Scale: 1:50 Sheet: A1 Stage ID: T	Dwg No: 1030
File. No:	CCWF-CCC- ZZ- 00-DR-A- 1030	
Job No:	ATS1_S_2021_025	