
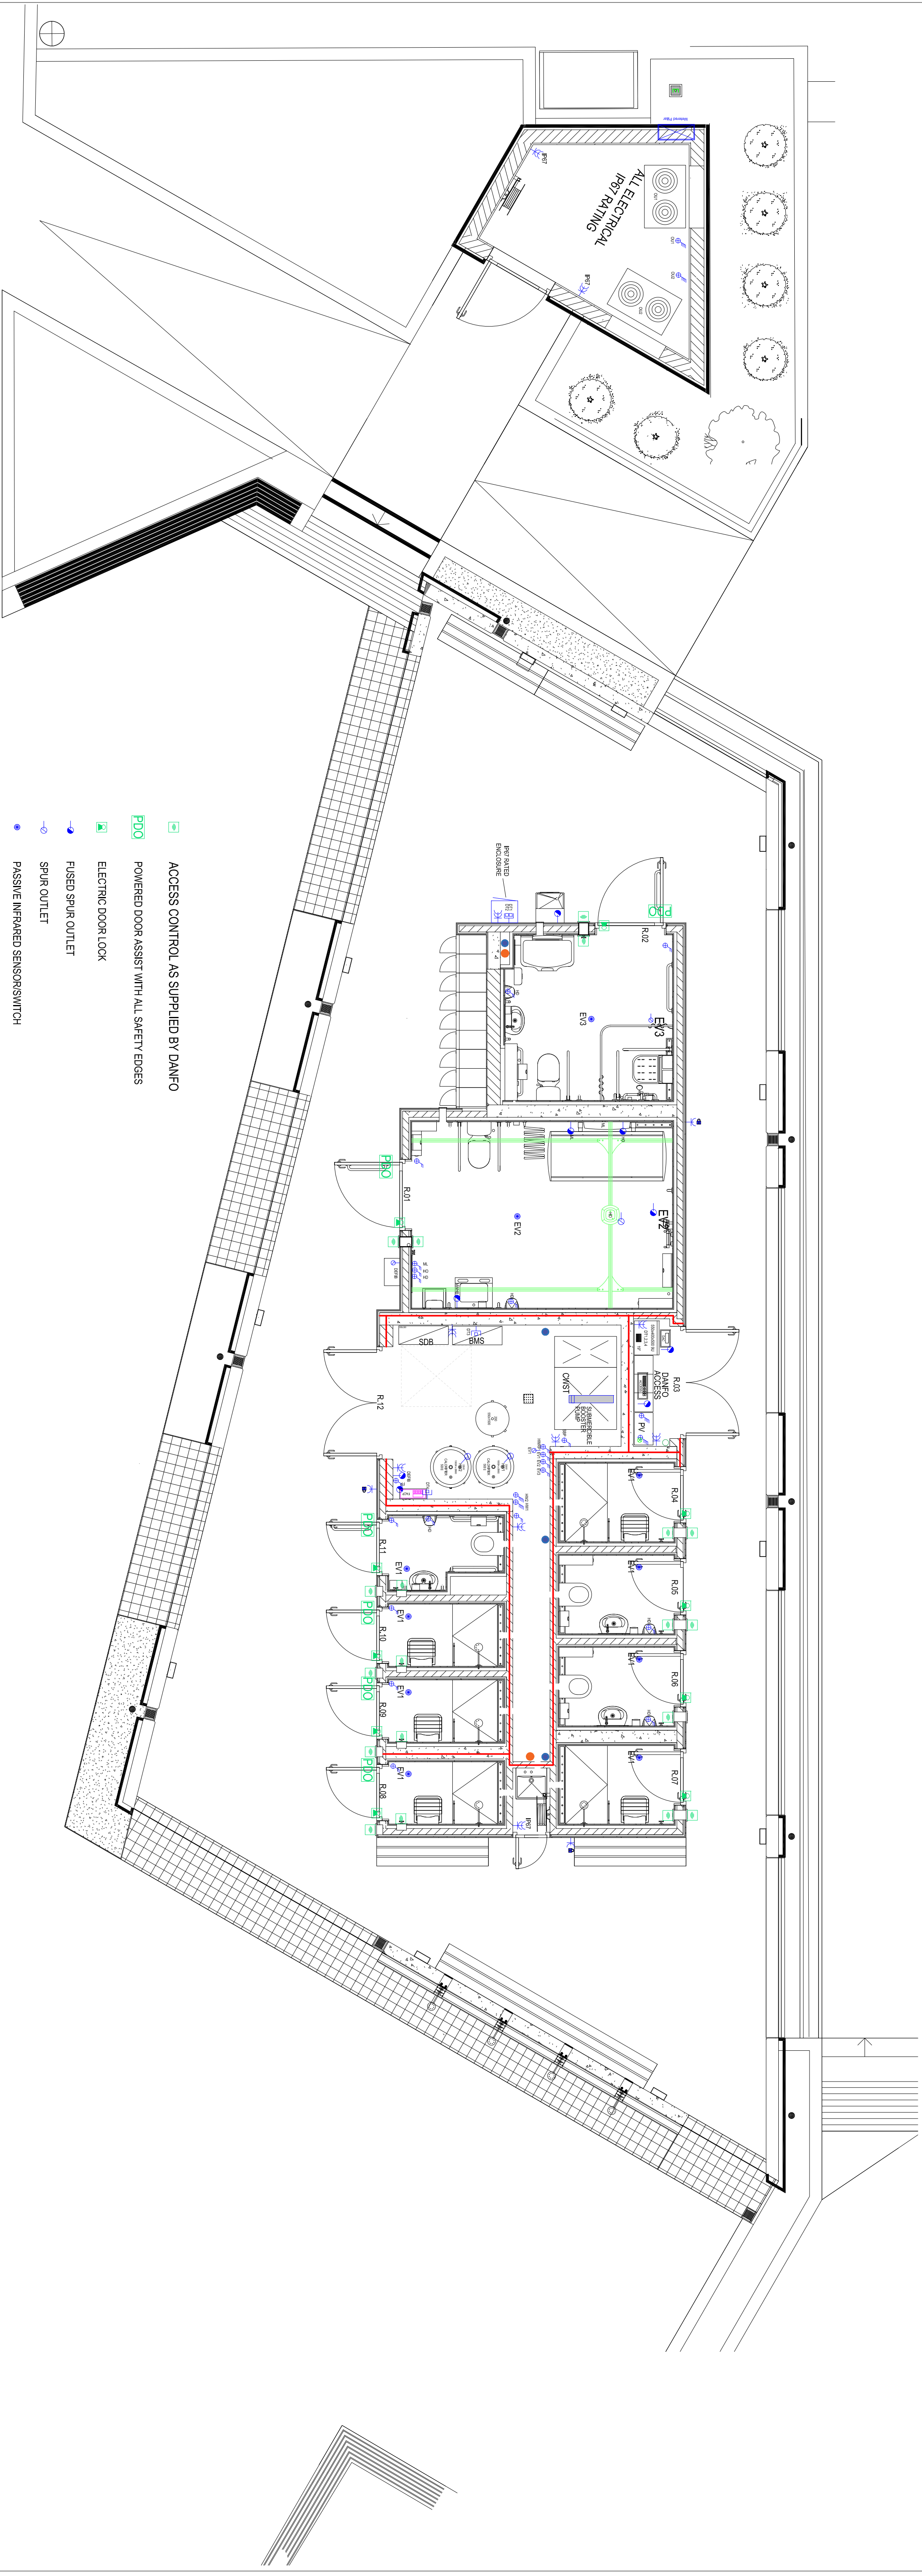


ALL CONDUITS ETC. TO BE ENCASED IN THE CONCRETE BEFORE POURING. NO CHASING ALLOWED. SEE SPECIFICATIONS FOR FURTHER INFORMATION.
END OF CONDUITS TO BE CAPPED AS TO PREVENT CONCRETE BLOCKAGES.

ALL ELECTRICAL EQUIPMENT AND WIRING ACCESSORIES TO BE MOUNTED A MINIMUM OF 1000MM ABOVE FFL WHERE POSSIBLE FOR FLOOD RISK MANAGEMENT.

ALL SYSTEMS ARE TO BE CAPABLE OF BEING FULLY DRAINED WHERE FREEZING TEMPERATURES COULD CAUSE DAMAGE TO PIPES AND EQUIPMENT.



- ACCESS CONTROL AS SUPPLIED BY DANFO
- POWERED DOOR ASSIST WITH ALL SAFETY EDGES
- ELECTRIC DOOR LOCK
- FUSED SPUR OUTLET
- SPUR OUTLET
- PASSIVE INFRARED SENSOR SWITCH
- SINGLE PHASE 20A-230V ISOLATOR OR AS SHOWN
- THREE PHASE 32A-380/400V ISOLATOR OR AS SHOWN
- SINGLE PHASE 13A-230V DOUBLE SOCKET
- SINGLE PHASE 13A-230V SOCKET LOCKABLE
- DOUBLE RJ45 SOCKET CAT6A
- ASSIST CALL PANEL
- IP67 RATED ENCLOSURE WITH DATA AND POWER CABLE ACCESS.
- DANFO POSITION FOR ACCESS CONTROL PANELS
- SMALL DATA CABINET
- PV INVERTER PANEL, THREE PHASE
- ADDRESSABLE FIRE ALARM PANEL WITH DIALING OUT FACILITY
- SUB DISTRIBUTION BOARD
- EARTH PT



POWER, TELECOMS, DATA, SECURITY, CCTV INSTALLATION

150 A1

DPE-W47-1002
DPE-W47-100X

Dark County Council

