



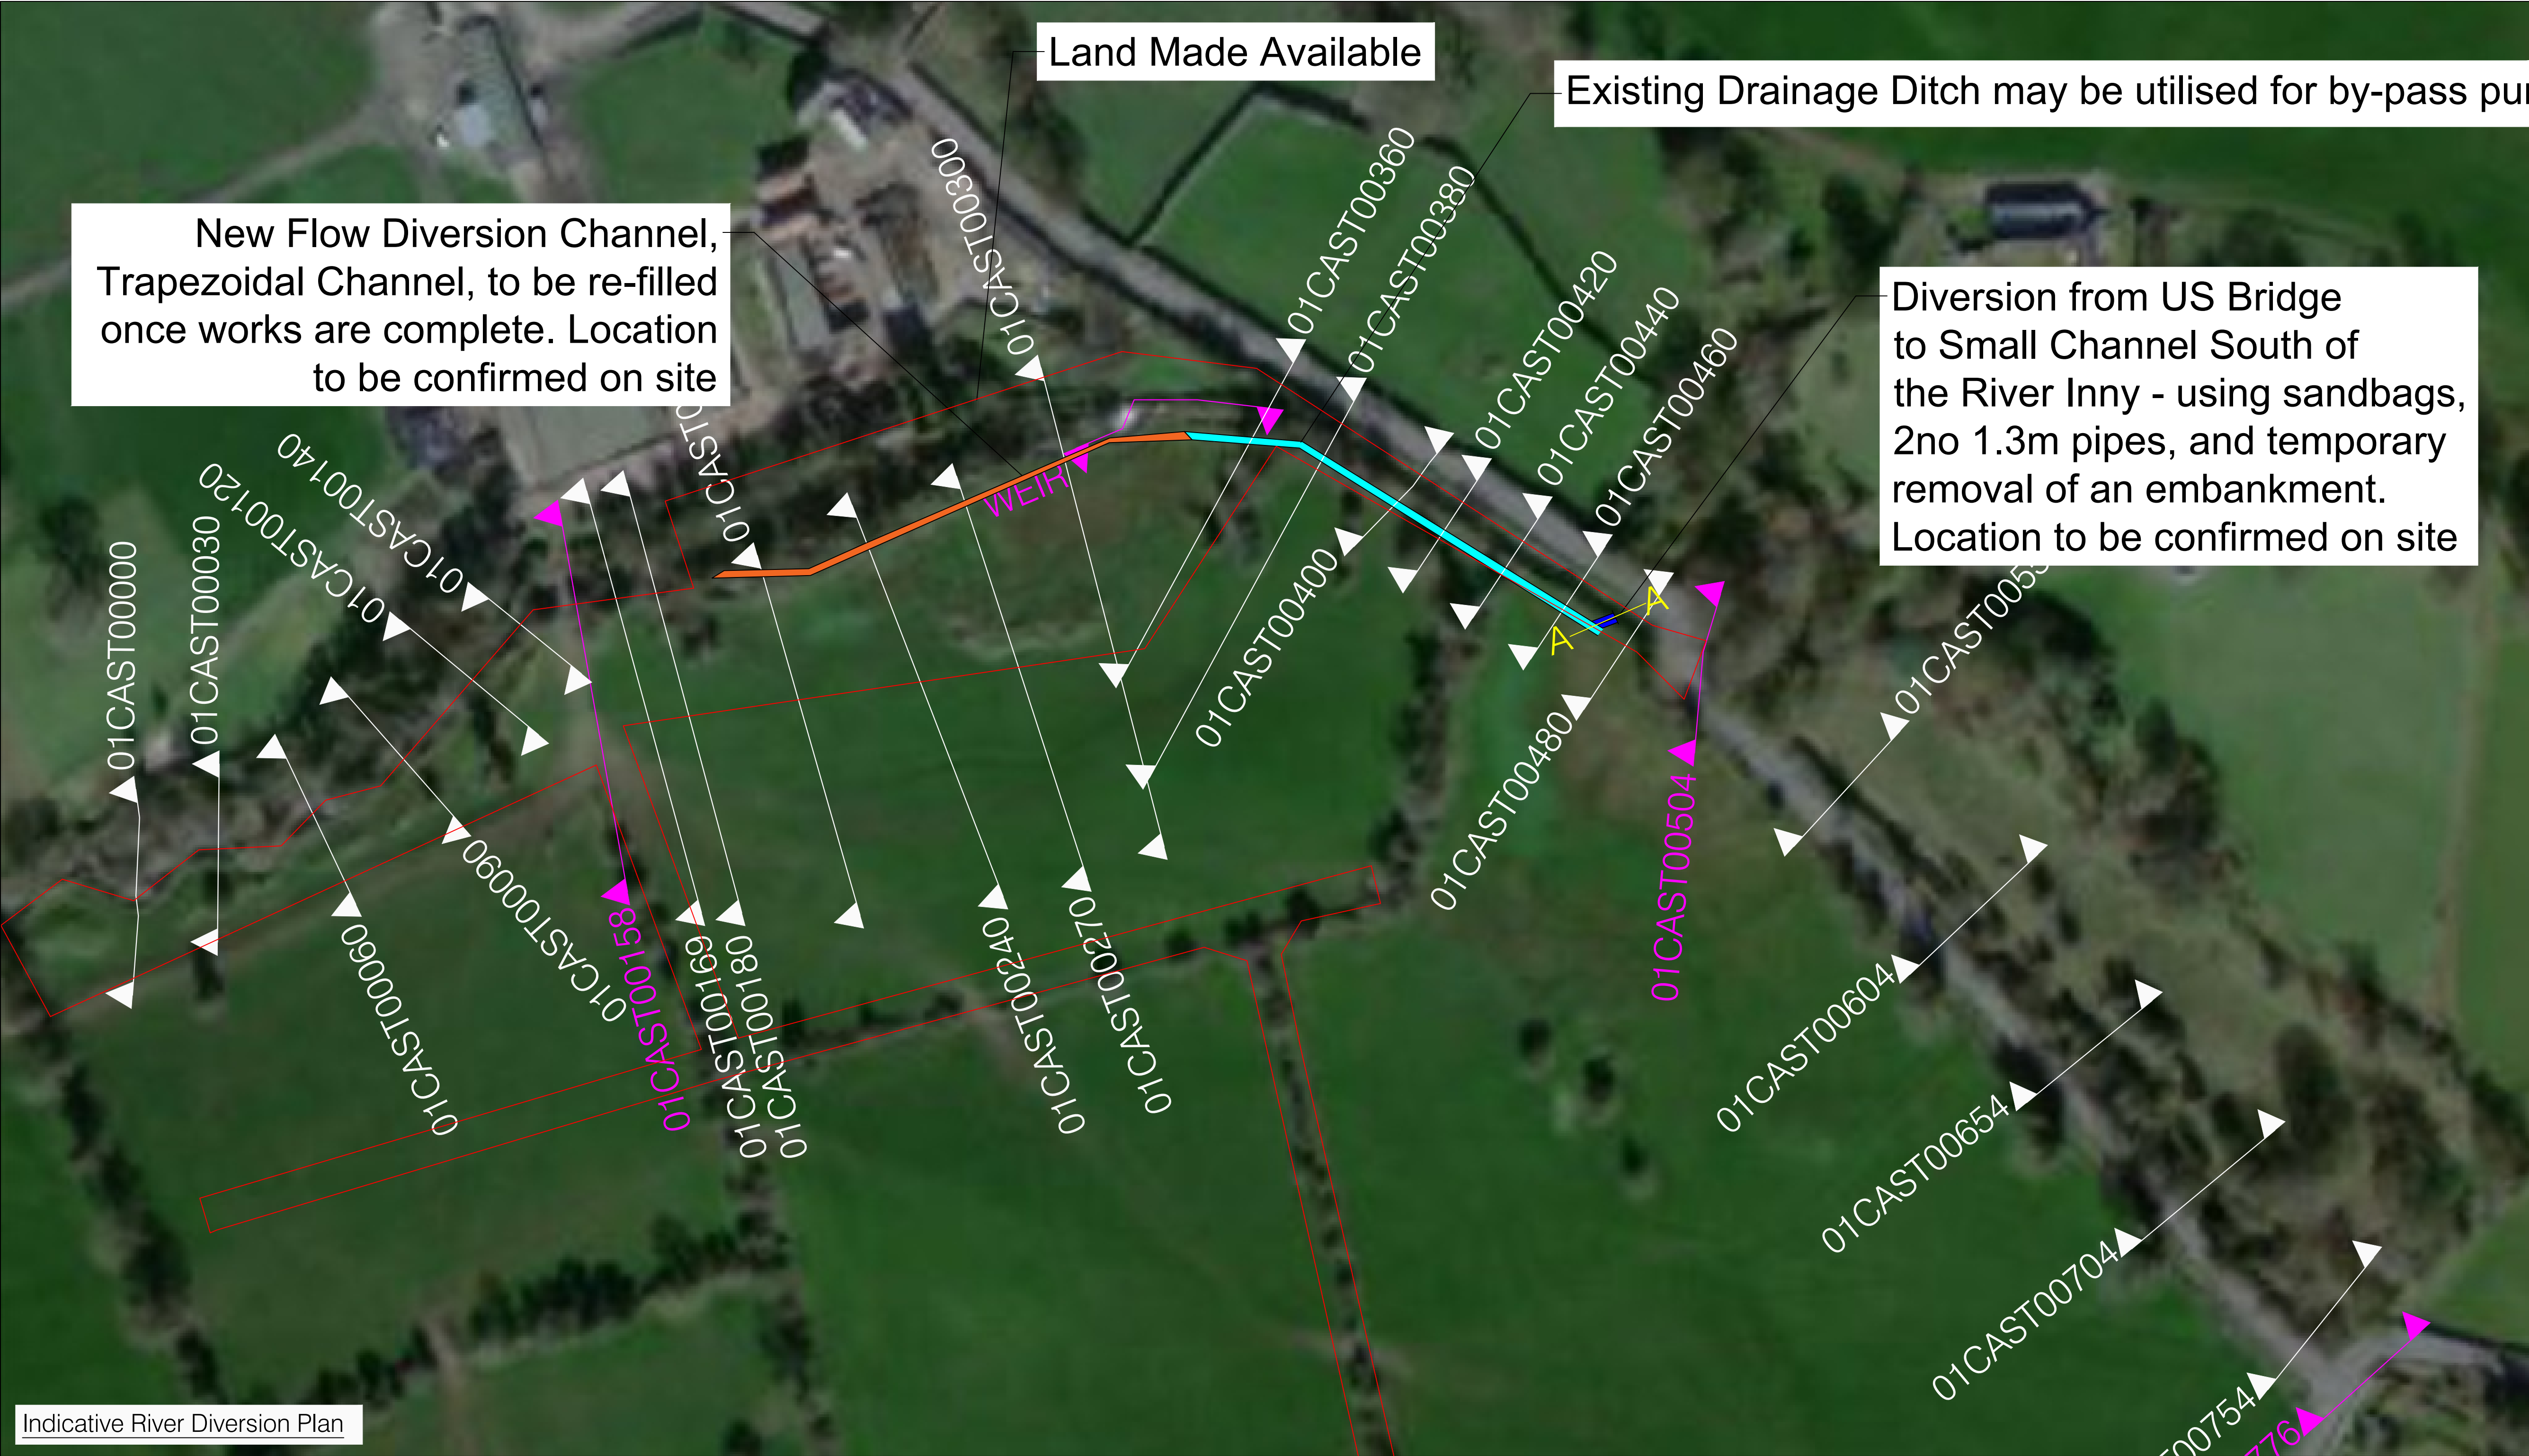

Indicative River Diversion Plan

Field Drainage Indicative Section A:A

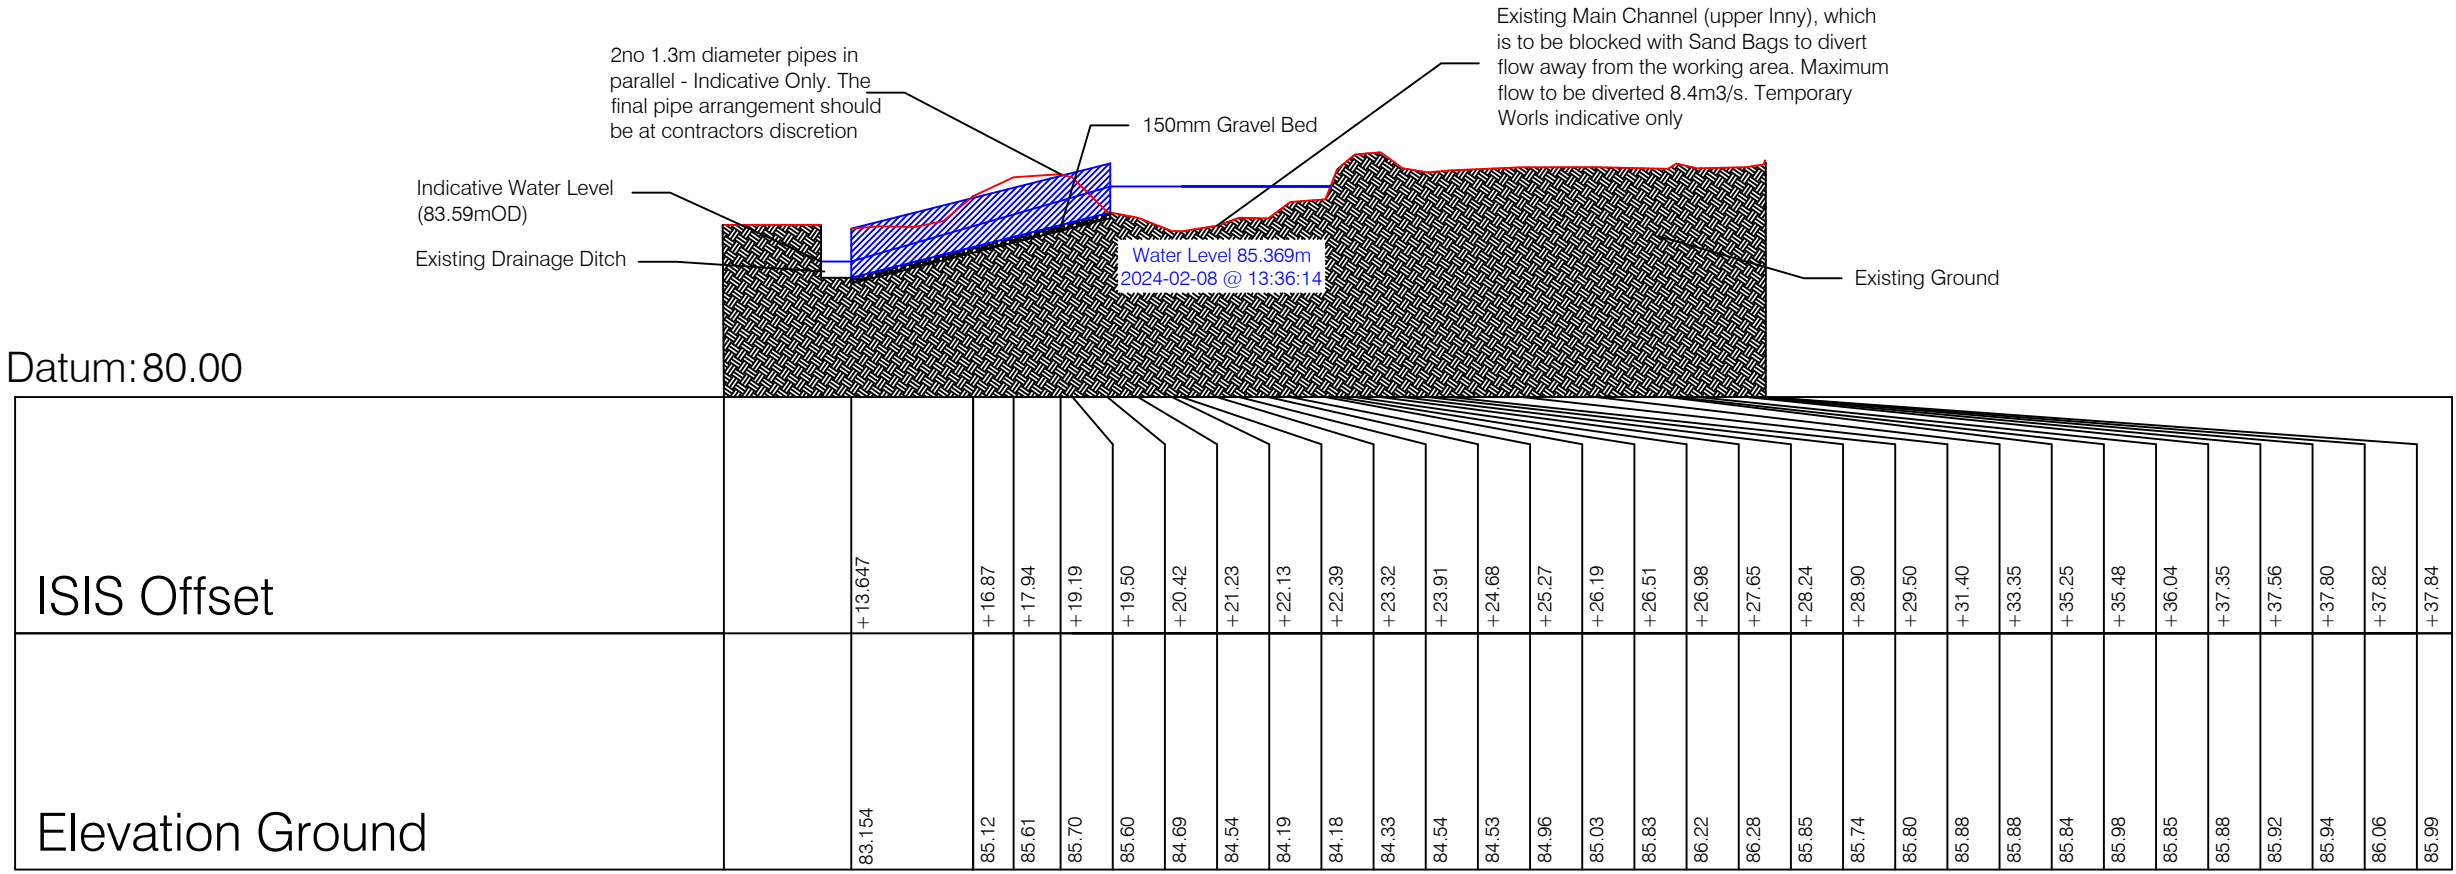

Scale 1:200



Existing Drainage Ditch

- NOTES:
1. FIGURED DIMENSIONS ONLY TO BE TAKEN FROM THIS DRAWING.
 2. ALL DRAWINGS TO BE CHECKED BY THE CONTRACTOR ON SITE.
 3. ENGINEER/EMPLOYERS REPRESENTATIVE, AS APPROPRIATE, TO BE INFORMED BY THE CONTRACTOR OF ANY DISCREPANCIES BEFORE ANY WORK COMMENCES.
 4. THE CONTRACTOR SHALL UNDERTAKE A THOROUGH CHECK FOR THE ACTUAL LOCATION OF ALL SERVICES/UTILITIES, ABOVE AND BELOW GROUND, BEFORE ANY WORK COMMENCES.
 5. ALL LEVELS SHOWN RELATE TO ORDNANCE SURVEY DATUM AT MALIN HEAD.
 6. THE CONTRACTOR AT ANY TIME MUST COMPLY WITH THE CEMP AND ECOW INSTRUCTIONS.
 7. ALL DISTURBED PASTURE LAND, INCLUDING TEMPORARY ACCESS ROUTES, WORKING AREAS AND COMPOUNDS, SHALL BE REINSTATED TO A CONDITION EQUAL TO OR BETTER THAN ITS PRE-WORKS CONDITION. THE CONTRACTOR SHALL REMOVE ALL TEMPORARY MATERIALS, DECOMPACT AND HARROW THE GROUND, IMPORT APPROVED TOPSOIL AS REQUIRED, APPLY FERTILISER, RESEED WITH AN APPROVED PASTURE GRASS MIX AND WATER/MAINTAIN THE AREA UNTIL A DENSE, UNIFORM GRASS COVER IS ESTABLISHED TO THE SATISFACTION OF THE EMPLOYER'S REPRESENTATIVE.
 8. ANY TEMPORARY FLOW DIVERSION CHANNELS SHOWN ON THIS DRAWING ARE INDICATIVE ONLY. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE DESIGN, IMPLEMENTATION, MAINTENANCE AND REMOVAL OF ALL TEMPORARY WORKS REQUIRED TO MAINTAIN RIVER FLOWS DURING CONSTRUCTION.
 9. WHERE AN EXISTING DRAINAGE DITCH IS UTILISED AS PART OF THE TEMPORARY FLOW DIVERSION WORKS, THE DITCH SHALL BE PROTECTED, RETAINED AND FULLY REINSTATED TO ITS PRE-WORKS CONDITION UPON COMPLETION OF THE WORKS.
 10. ANY NEW TEMPORARY FLOW DIVERSION CHANNEL EXCAVATED FOR THE PURPOSE OF BYPASSING RIVER FLOWS SHALL BE FULLY INFILLED, REINSTATED AND RETURNED TO ITS ORIGINAL CONDITION UPON COMPLETION OF THE WORKS.
 11. THE CONTRACTOR SHALL SUBMIT PROPOSALS FOR THE MANAGEMENT AND BYPASS OF RIVER FLOWS DURING IN-STREAM WORKS, INCLUDING A TEMPORARY WORKS DESIGN CERTIFICATE PREPARED AND SIGNED BY A SUITABLY QUALIFIED CHARTERED ENGINEER.
 12. THE CONTRACTOR SHALL COMPLY WITH ALL MITIGATION MEASURES AND ENVIRONMENTAL CONTROLS SPECIFIED IN THE CEMP AND ECOW REQUIREMENTS. ANY PROPOSED ALTERNATIVE METHODOLOGIES SHALL BE SUBJECT TO THE CONTRACTOR OBTAINING ALL NECESSARY STATUTORY APPROVALS AND CONSENTS.
 13. THE CONTRACTOR SHALL MONITOR WEATHER FORECASTS, RIVER LEVELS AND FLOW CONDITIONS THROUGHOUT THE DURATION OF THE WORKS. IN-STREAM WORKS SHALL BE SUSPENDED AND PLANT, MATERIALS AND PERSONNEL REMOVED FROM THE CHANNEL WHERE FLOOD FLOWS, HEAVY RAINFALL OR OTHER CONDITIONS MAY GIVE RISE TO A FLOOD RISK OR RESULT IN POLLUTION OF THE WATERCOURSE.

A	03-06-26	DRAFT	F.O'C	A.T.
Rev	Date	Description	By	Chkd.

Client: **INLAND FISHERIES IRELAND**

Project: **CASTLECOR WEIR REMOVAL**

Title: **RIVER DIVERSION PLAN VIEW & FIELD DRAINAGE INDICATIVE SECTION**

Scale @ A1:	1:1000	
Prepared by:	Checked by:	Date:
F.O'C	A.T.	03-06-2026

Drawing Status: **DRAFT**

TOBIN

Tel: +353 (0)91 565 211
Email: info@tobin.ie
www.tobin.ie

Drawing No.: 12404-1003	Revision: A
--------------------------------	--------------------