



Schedule of Finishes

**For Foilmore G.A.A dressing rooms located at
Gortmore, Cahersiveen, Co.Kerry**

This Schedule has been prepared for the purpose of showing sample finishes for the purpose of pricing.


1.0 - Floor Finishes

Provide and fix 150mm high MDF skirting to all walls, external and internal

Painted floor at changing room area

Tiled floor to remaining areas except for;

Rubberised flooring to be installed at gym area by others

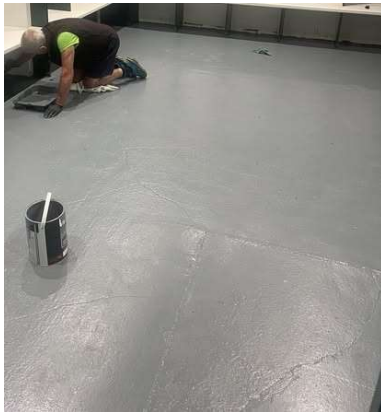

Sample Painted Floor (T.B.C)



Sample Tiled Floor (T.B.C)



Sample Rubberised Floor at Gym (T.B.C)

Walls at shower areas to be tiled to a height of 1.2m high (T.B.C)

2.0 - W/C Finishes

All shower areas to have surface mounted shower heads and valves

Standard Toilet and Seat



Sample surface mounted shower head



Sample Toilet

3.0 - Internal Woodwork Finishes



Sample 150mm MDF Skirting



Sample Shaker Door & Ironmongery

4.0 - Kitchen

Formica Worktops

MFC carcasses

Acrylic Doors (Colour T.B.C)

Stainless Steel Sink & Mixer Tap

Stainless Steel Handles



Sample Kitchen