


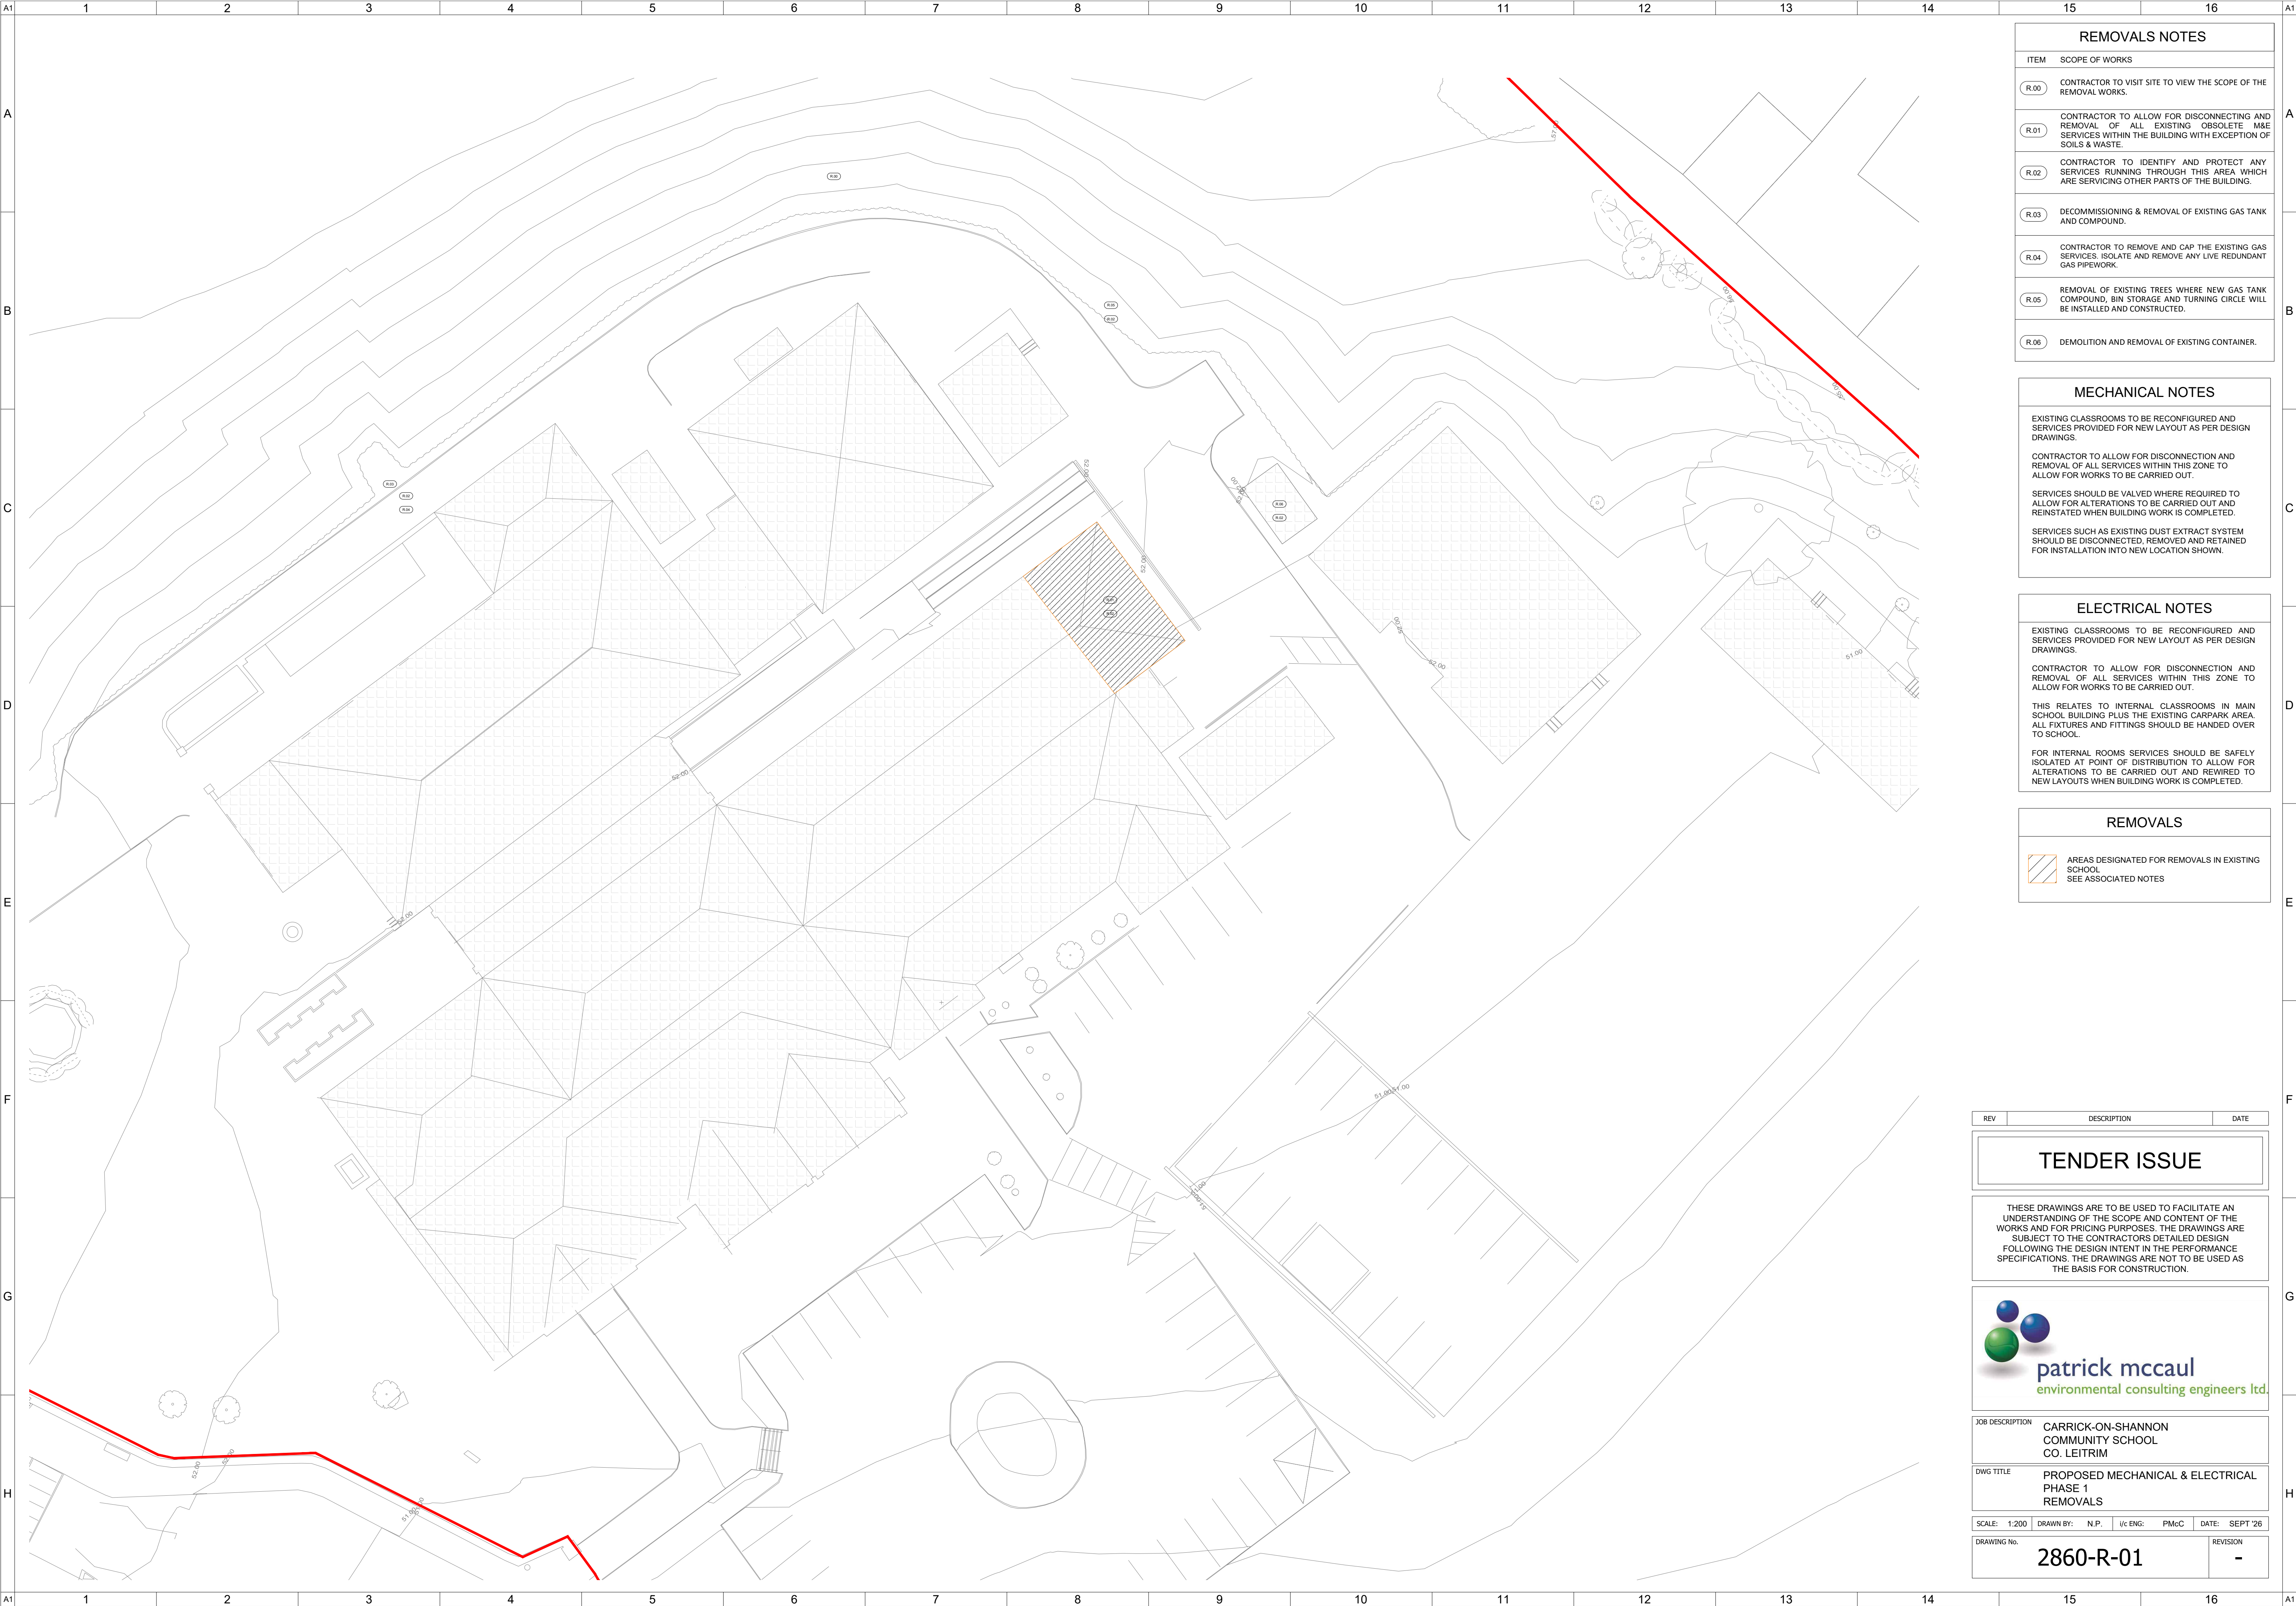

REMOVALS NOTES	
ITEM	SCOPE OF WORKS
R.00	CONTRACTOR TO VISIT SITE TO VIEW THE SCOPE OF THE REMOVAL WORKS.
R.01	CONTRACTOR TO ALLOW FOR DISCONNECTING AND REMOVAL OF ALL EXISTING OBSOLETE M&E SERVICES WITHIN THE BUILDING WITH EXCEPTION OF SOILS & WASTE.
R.02	CONTRACTOR TO IDENTIFY AND PROTECT ANY SERVICES RUNNING THROUGH THIS AREA WHICH ARE SERVICING OTHER PARTS OF THE BUILDING.
R.03	DECOMMISSIONING & REMOVAL OF EXISTING GAS TANK AND COMPOUND.
R.04	CONTRACTOR TO REMOVE AND CAP THE EXISTING GAS SERVICES. ISOLATE AND REMOVE ANY LIVE REDUNDANT GAS PIPEWORK.
R.05	REMOVAL OF EXISTING TREES WHERE NEW GAS TANK COMPOUND, BIN STORAGE AND TURNING CIRCLE WILL BE INSTALLED AND CONSTRUCTED.
R.06	DEMOLITION AND REMOVAL OF EXISTING CONTAINER.

MECHANICAL NOTES	
EXISTING CLASSROOMS TO BE RECONFIGURED AND SERVICES PROVIDED FOR NEW LAYOUT AS PER DESIGN DRAWINGS.	
CONTRACTOR TO ALLOW FOR DISCONNECTION AND REMOVAL OF ALL SERVICES WITHIN THIS ZONE TO ALLOW FOR WORKS TO BE CARRIED OUT.	
SERVICES SHOULD BE VALVED WHERE REQUIRED TO ALLOW FOR ALTERATIONS TO BE CARRIED OUT AND REINSTATED WHEN BUILDING WORK IS COMPLETED.	
SERVICES SUCH AS EXISTING DUST EXTRACT SYSTEM SHOULD BE DISCONNECTED, REMOVED AND RETAINED FOR INSTALLATION INTO NEW LOCATION SHOWN.	

ELECTRICAL NOTES	
EXISTING CLASSROOMS TO BE RECONFIGURED AND SERVICES PROVIDED FOR NEW LAYOUT AS PER DESIGN DRAWINGS.	
CONTRACTOR TO ALLOW FOR DISCONNECTION AND REMOVAL OF ALL SERVICES WITHIN THIS ZONE TO ALLOW FOR WORKS TO BE CARRIED OUT.	
THIS RELATES TO INTERNAL CLASSROOMS IN MAIN SCHOOL BUILDING PLUS THE EXISTING CARPARK AREA. ALL FIXTURES AND FITTINGS SHOULD BE HANDED OVER TO SCHOOL.	
FOR INTERNAL ROOMS SERVICES SHOULD BE SAFELY ISOLATED AT POINT OF DISTRIBUTION TO ALLOW FOR ALTERATIONS TO BE CARRIED OUT AND REWIRED TO NEW LAYOUTS WHEN BUILDING WORK IS COMPLETED.	

REMOVALS	
	AREAS DESIGNATED FOR REMOVALS IN EXISTING SCHOOL SEE ASSOCIATED NOTES

REV	DESCRIPTION	DATE
TENDER ISSUE		
THESE DRAWINGS ARE TO BE USED TO FACILITATE AN UNDERSTANDING OF THE SCOPE AND CONTENT OF THE WORKS AND FOR PRICING PURPOSES. THE DRAWINGS ARE SUBJECT TO THE CONTRACTORS DETAILED DESIGN FOLLOWING THE DESIGN INTENT IN THE PERFORMANCE SPECIFICATIONS. THE DRAWINGS ARE NOT TO BE USED AS THE BASIS FOR CONSTRUCTION.		
		
JOB DESCRIPTION	CARRICK-ON-SHANNON COMMUNITY SCHOOL CO. LEITRIM	
DWG TITLE	PROPOSED MECHANICAL & ELECTRICAL PHASE 1 REMOVALS	
SCALE: 1:200	DRAWN BY: N.P.	I/C ENG: PMcC DATE: SEPT '26
DRAWING No.	2860-R-01	
	REVISION -	