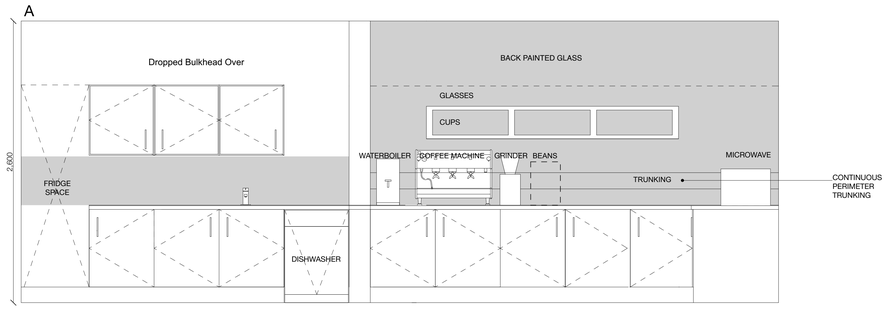

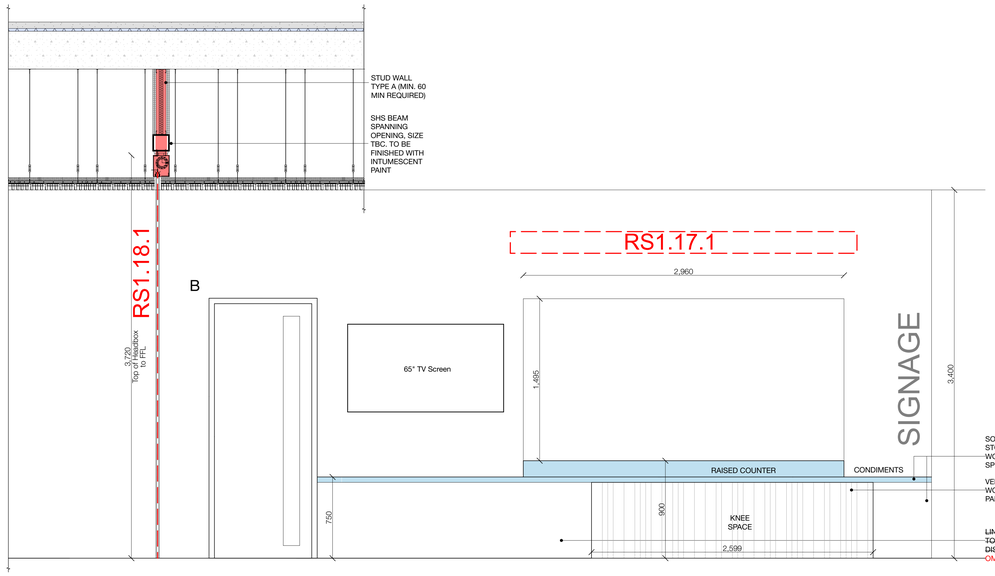

SOLID ACRYLIC STONE WORKTOP AND SPLAYED SIDES

VERTICAL WOODEN PANELLING REF:

~~LINEAR VENT TO CHILLED DISPLAY.~~ OMITTED

FULL HEIGHT SPUR SHELVING REF: 45-35-15/462

CONTINUOUS PERIMETER TRUNKING

~~HORIZONTAL SLIDING SCREEN REF:45-25-10 /320 TO BE LOCKABLE FULLY OPEN OR FULLY CLOSED. SIZED TO SUIT OPENING.~~ OMITTED

OPEN BIN HOLE. BIN LINER BASKET AND LOCKABLE, OPENABLE ACCESS PANEL TO SIDE.

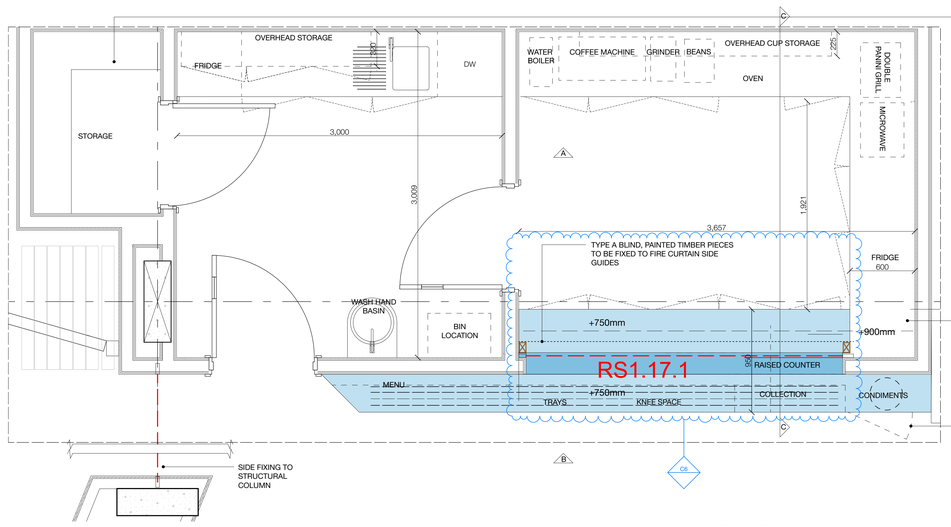

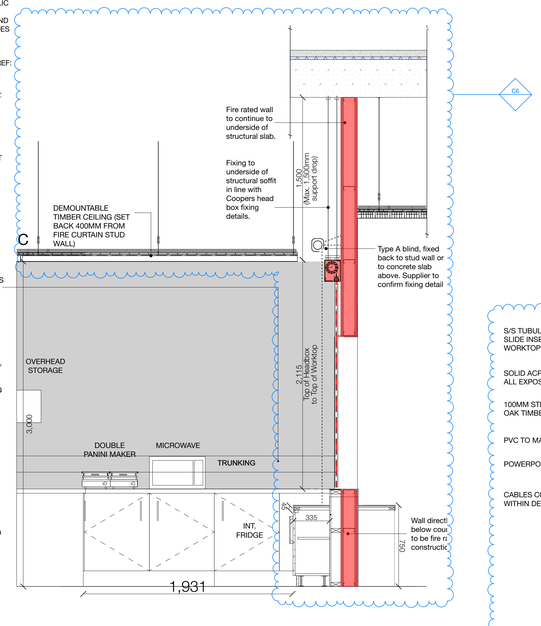

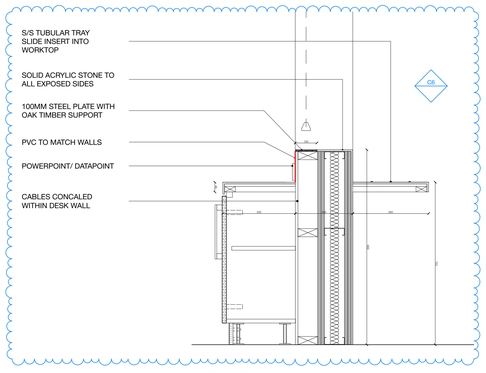

1 Cafe Servery1.18 1:20

Till Area Detail 1:10

NOTES

- Check all dimensions on site. Do not scale from this drawing.
- Report discrepancies and / or omissions to Hall Black Douglas.
- This drawing is copyright of Hall Black Douglas UK, see title panel for date of creation.
- This drawing is project specific and confidential. No part is to be used or copied in any way without the express prior consent of Hall Black Douglas. Hall Black Douglas can accept no liability for content or accuracy of any information provided on this drawing which has been supplied by third party surveyors or consultants.

To be read in conjunction with NBS specification.

All product descriptions should be read as including the phrase "or other equal". It is the responsibility of the Contractor to demonstrate compliance of products and systems with the building regulations and specification requirements by way of agreement certification of the product etc. for any proposed substitution.

Contractor to provide fabrication drawings for approval prior to manufacture.

Worktop
Solid Surface Acrylic Stone
Ref: 45-35-95/315

Base Units
Ref: 45-35-80/340

Doors
Through Coloured Moisture Resistant MDF
Ref: 45-35-80/340

Plinth
Satin Stainless Steel
Ref: 45-35-80/340

Backsplash
Back painted Glass
Ref: 45-35-15/464

BACK PAINTED GLASS WALL LINING

LOWERED COUNTERTOP, +750MM

Door and ironmongery blank to be provided for use with integrated fridge and dishwashers

Please note drawing 3316-HBD-DT(7-)002, 3316-HBD-DT(7-)003, 3316-HBD-DT(7-)005 show some equipment that is listed within the Group 2 equipment schedule. The contractor should provide installation and builders work in connection to these items.

NO.	AMENDMENT	DATE	BY	CHECKED
C6	- Steel plate indicated to counter at Fire Curtain drop. - Type A blind (to replace sliding screen) indicated.	03.10.2023	KM	JS
C5	5.1 Worktop shortened and units moved to accommodate tall fridge. 5.2 Servery Fridge location shown and confirmed as integrated. 5.3 TV location shown	21.09.2022	KM	JS
C4	4.1 Additional Steel beam and stud wall above Fire Curtain RS 1.18.1 4.2 Section amended to suit Wall Type Tech submittal size. Max. support drop indicated to Fire Curtain RS 1.18.1 4.3 Section amended to suit Wall Type Tech submittal size	21.09.2022	KM	JS
C3	Servery door drawer to suit specification Wall arrangement amended to suit sliding partition	01.06.2022	KM	JS
C2	2.1 Detail revised	10.03.2020	MS	JS
C1	CONSTRUCTION ISSUE	27.07.2020	MS	JS

CLIENT
Monaghan County Council

PROJECT
Monaghan, Community Peace Campus
Lands between North Road, Plantation Road and Glaslough Street, Kilnacloy, Monaghan Co. Monaghan

DRAWING
Proposed Cafe Servery Details

DRAWING NUMBER	REVISION	SCALE	DATE	DRAWN	CHECKED
3316-HBD-DT(7-)002	####	1:20, 1:10	03/10/2023	JS	

HALL BLACK DOUGLAS
Architects
152 Albertbridge Road
Belfast BT5 4GS
hallblackdouglas.com
028 9045 0681