



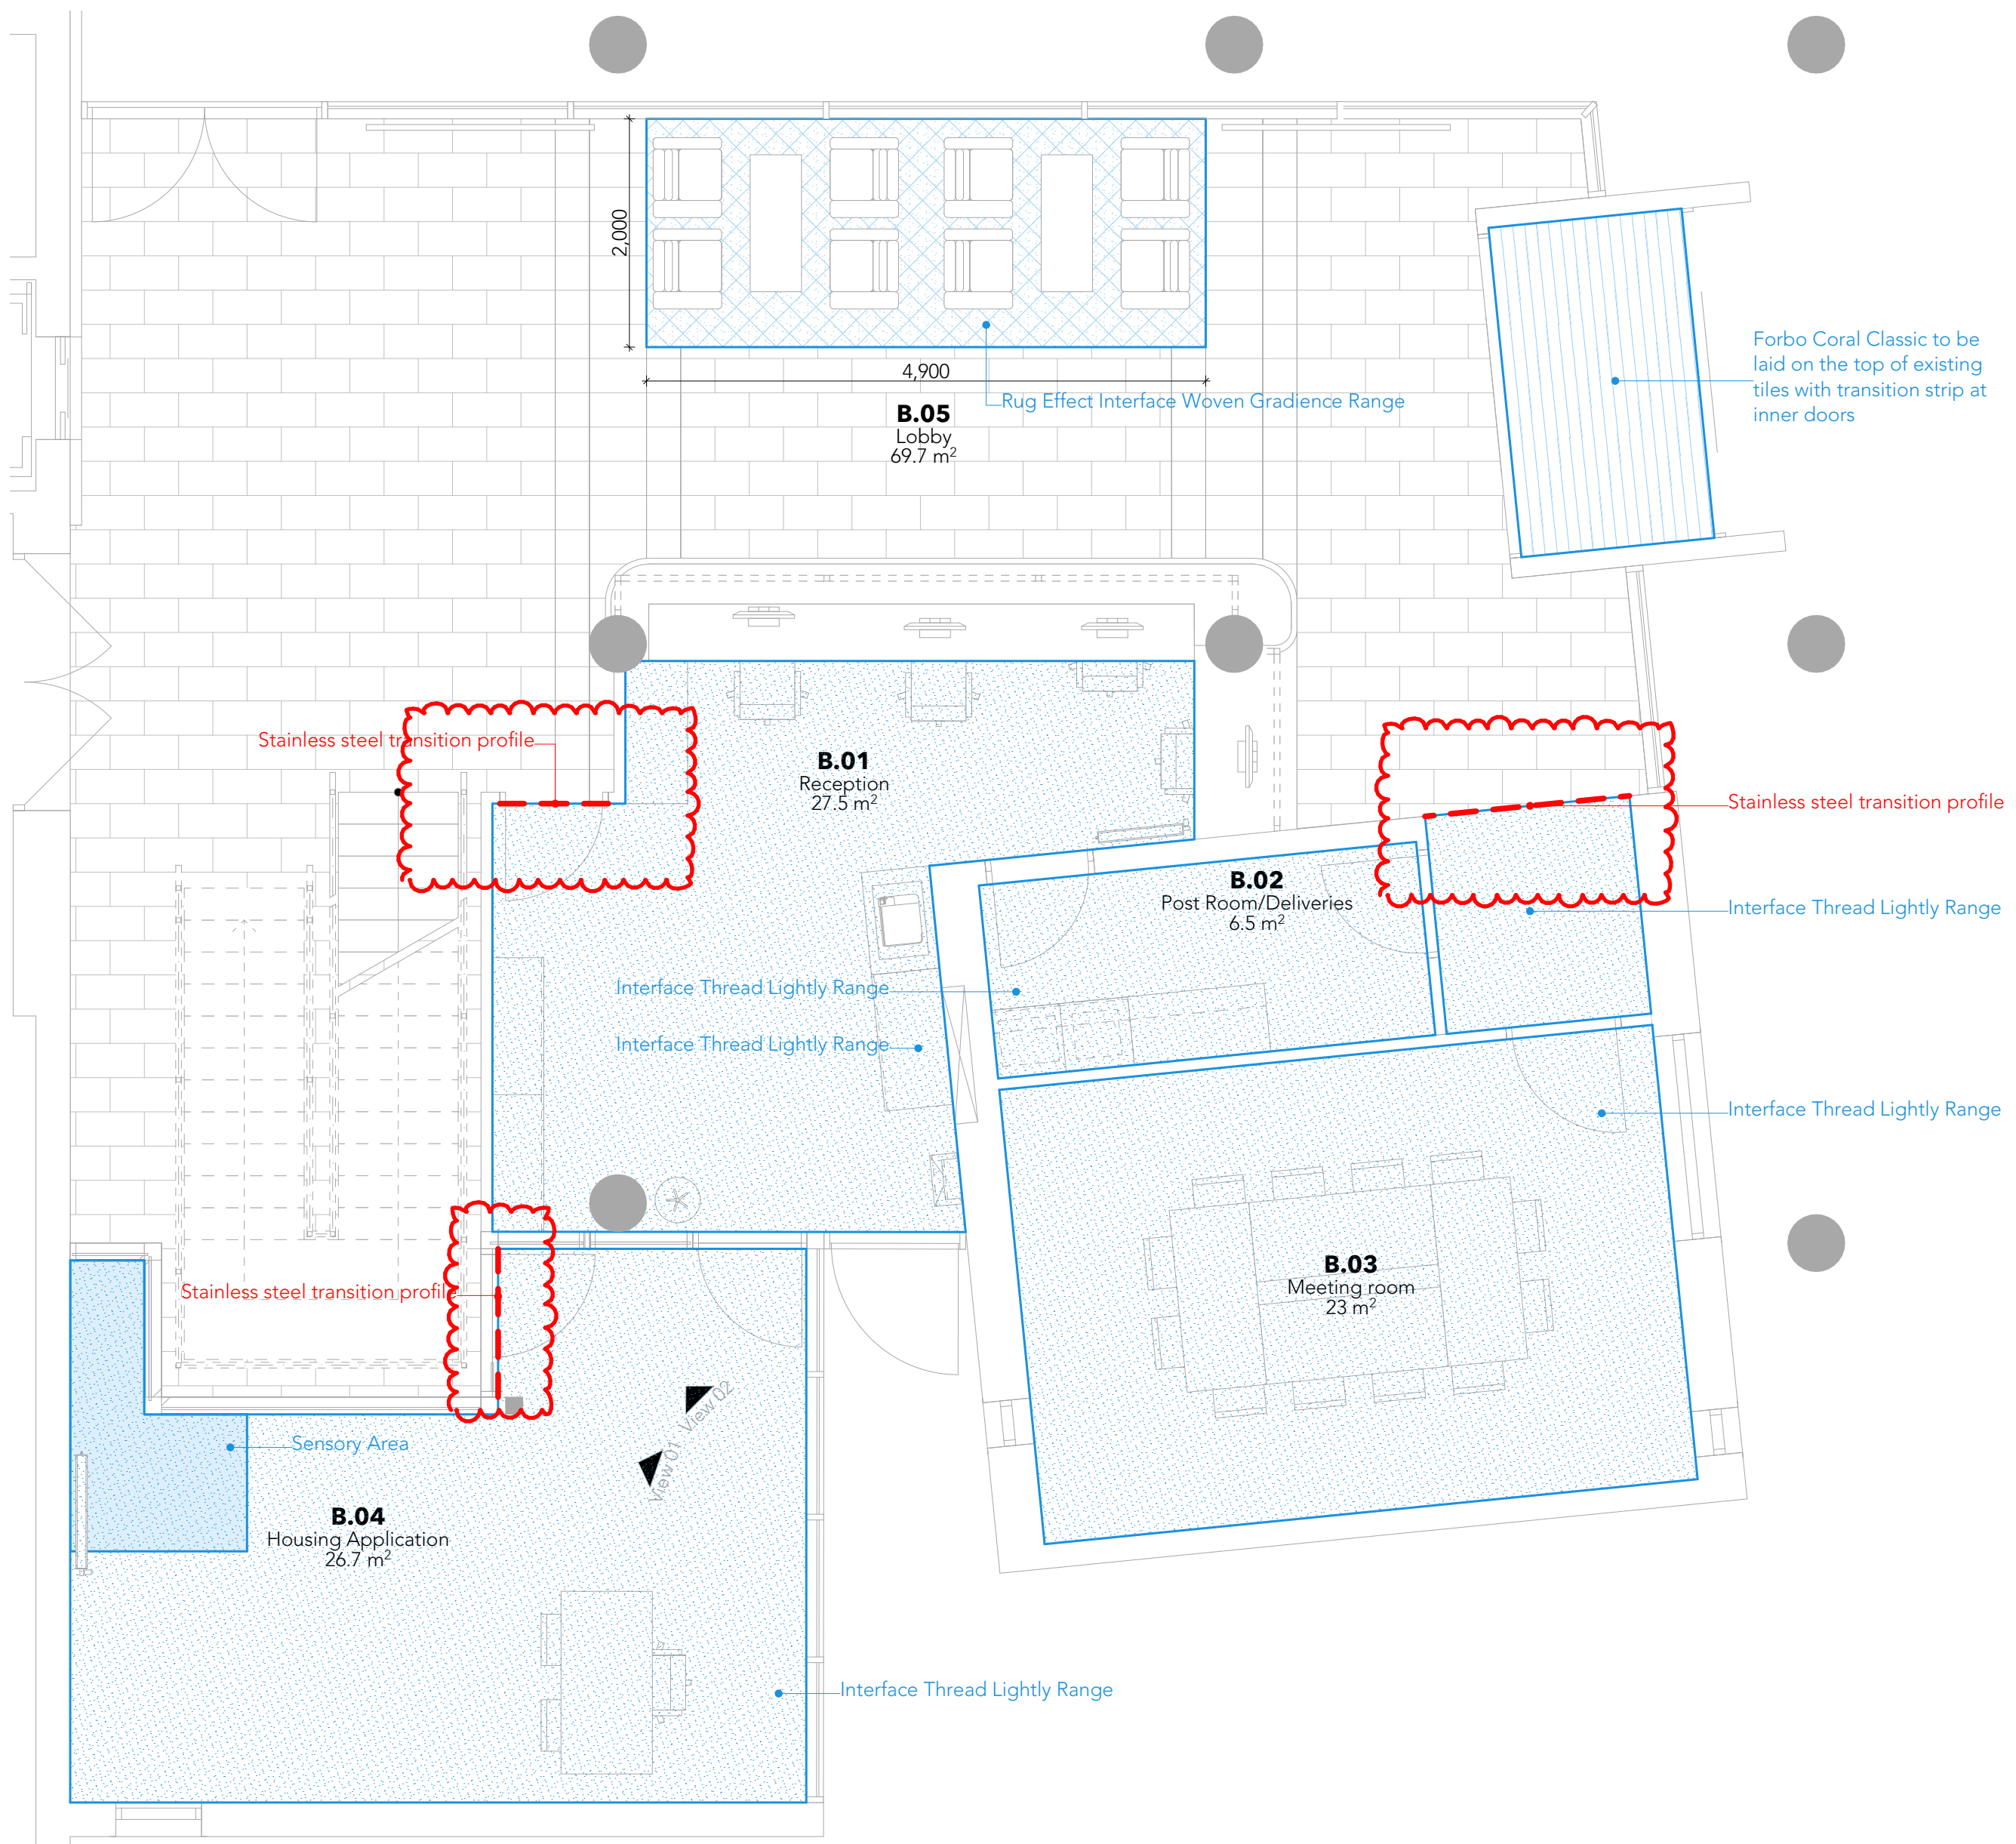

FLOOR FINISHES

1:50

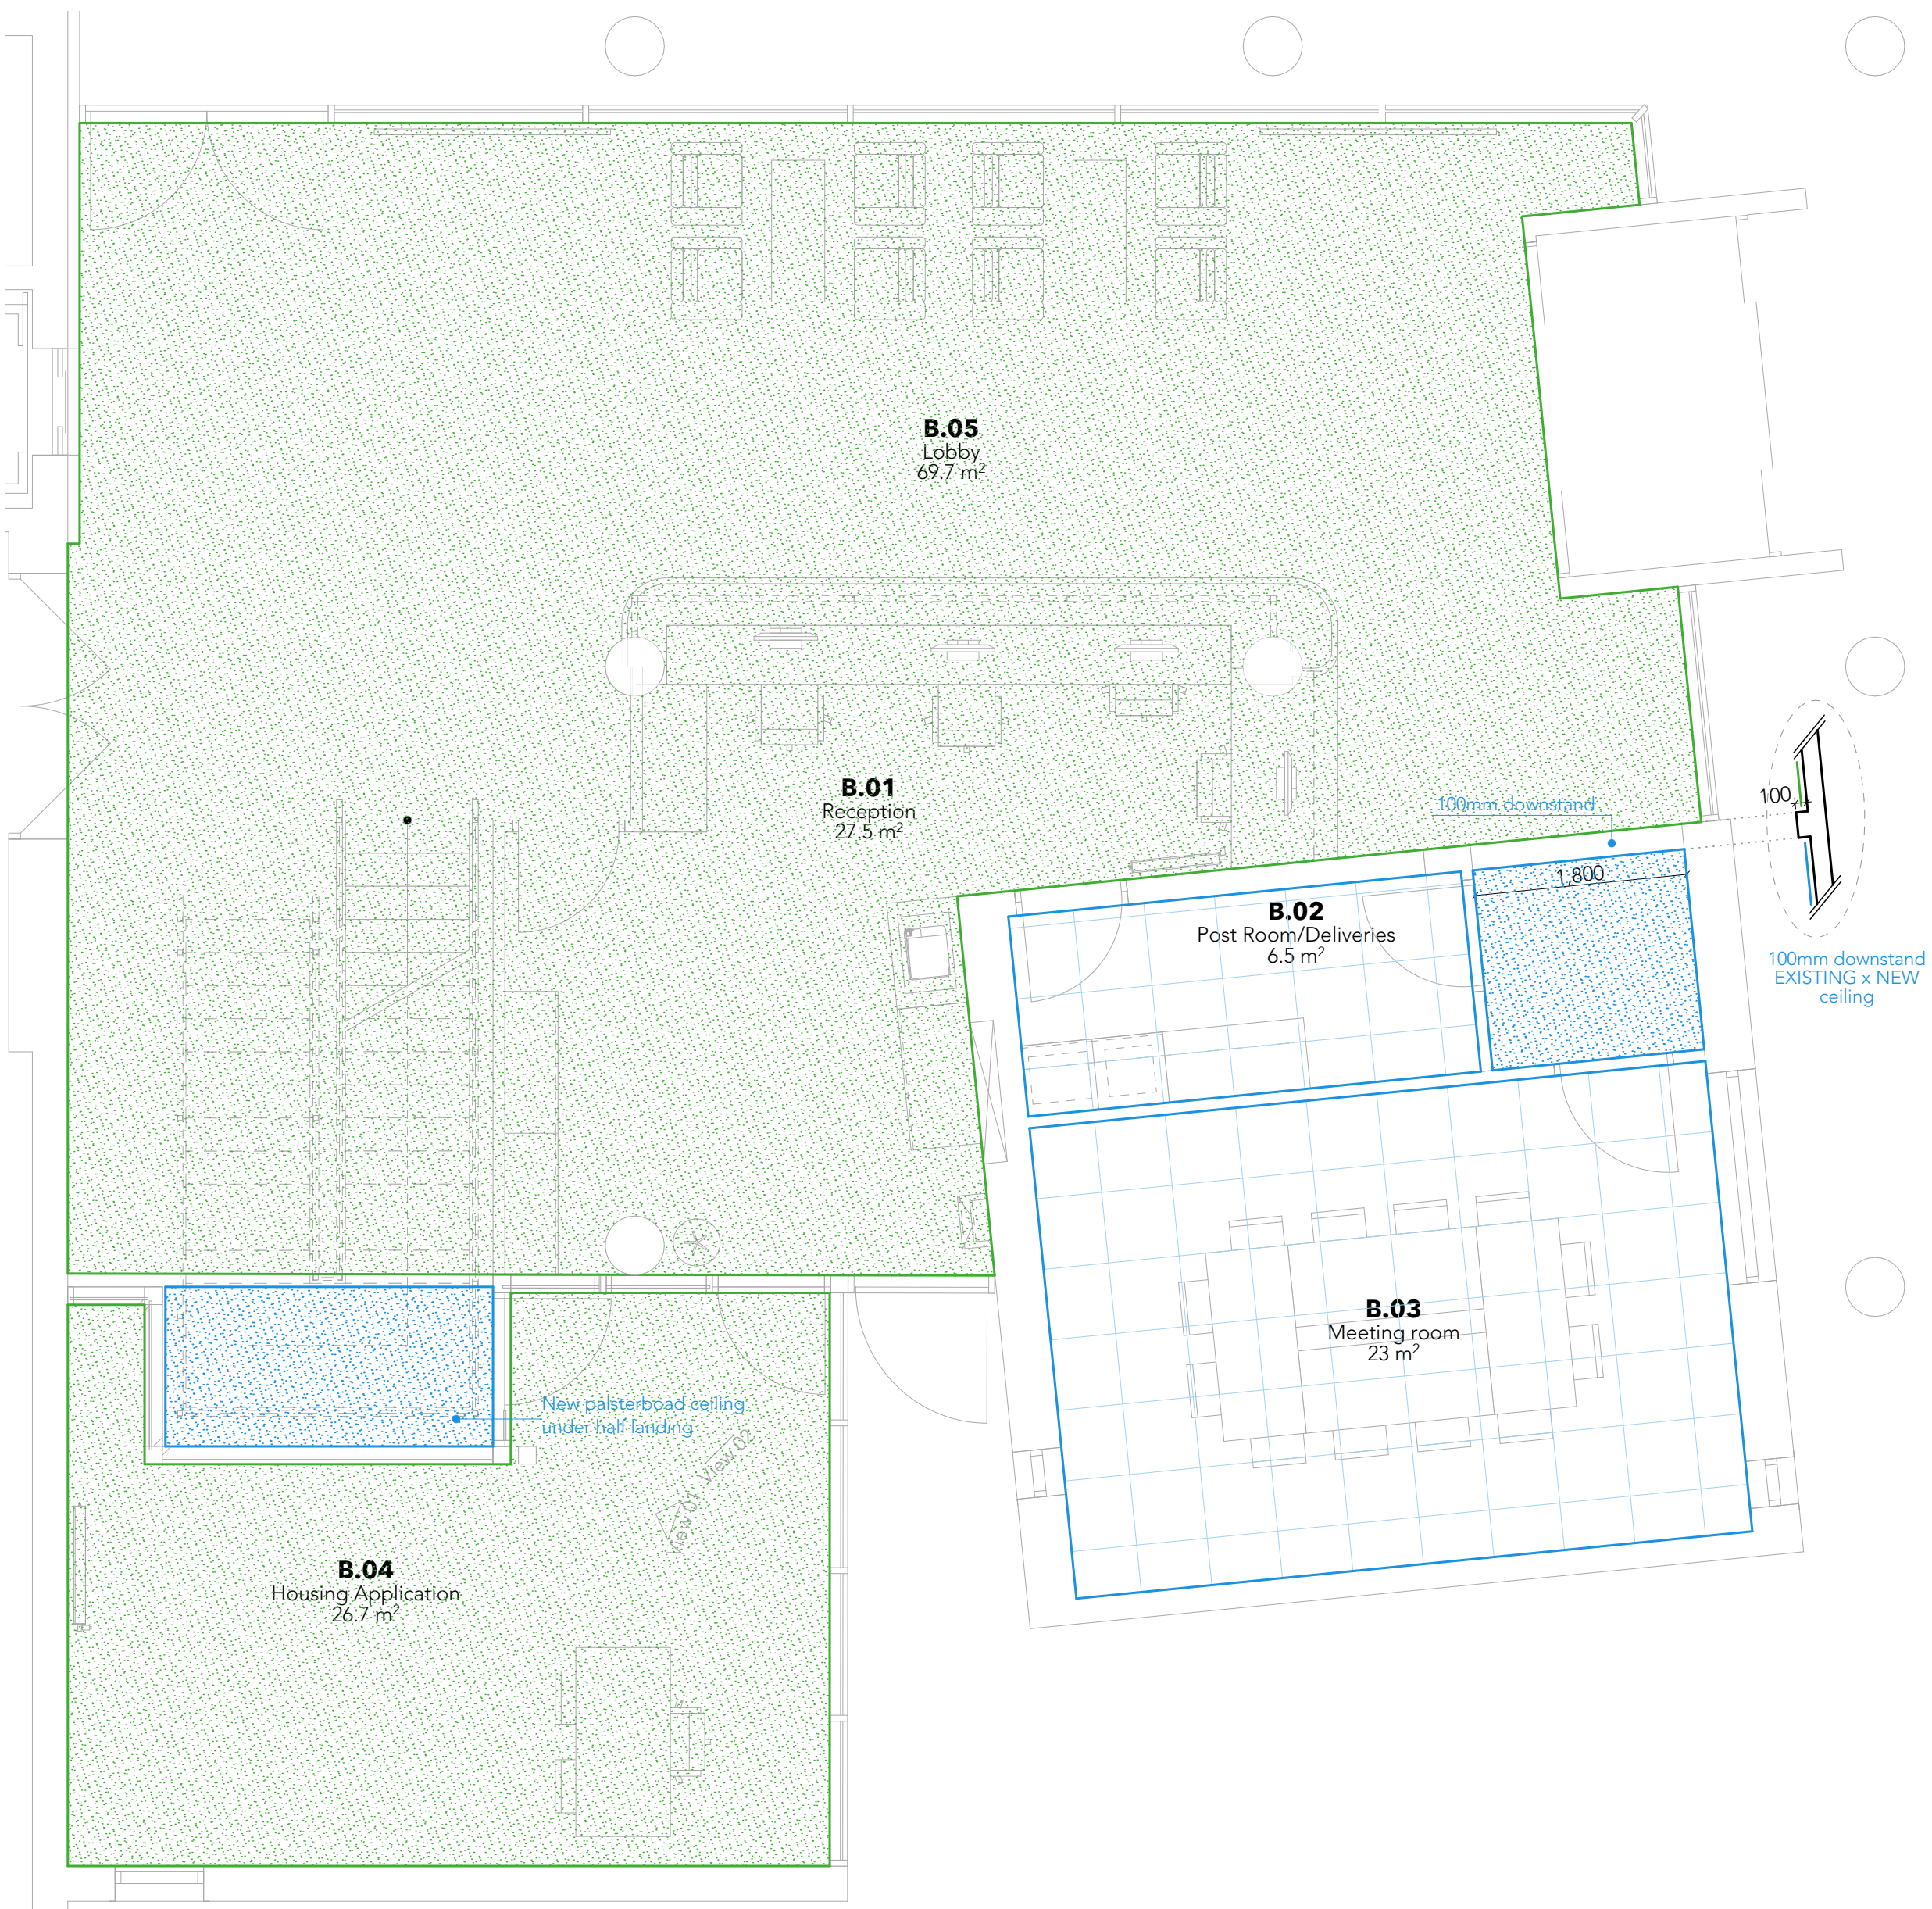

CEILING FINISHES

1:50

Finishes Schedule

NO	B.01	B.02	B.03	B.04	B.05
Room Name	Reception	Post Room/Deliveries	Meeting room	Housing Application	Lobby
Area (m2)	27.5	6.5	23.0	26.7	69.7
Floor Finish	Interface Thread Lightly Range	Interface Thread Lightly Range	Interface Thread Lightly Range	Interface Thread Lightly Range	Part of the existing tile surface to be replaced with Rug Effect Interface Woven Gradience Range
Wall Finish	Existing wall paint redecoration	Existing wall paint redecoration	Existing wall paint redecoration	Existing wall paint redecoration	Existing wall paint redecoration
Ceiling Finish	Existing ceiling redecoration	Rockfon Koral E24 600x600x15	Rockfon Koral E24 600x600x15	Existing ceiling redecoration	Existing ceiling redecoration / New plasterboard ceiling - see ceiling finishes drawing

CEILING MATERIAL KEY:

	Existing plasterboard ceiling redecoration
	New plasterboard ceiling
	Rockfon Koral E24 600x600x15 - Ceiling Tiles

FLOOR MATERIAL KEY:

	Interface Thread Lightly Range
	Rug Effect Interface Woven Gradience Range
	Forbo Coral Classic
	Existing floor tiles to be retained

NOTE:

1. New painted timber skirting where new floor finish to be installed
2. Existing matt in Lobby to be removed. Mat well to be filled with levelling screed.
New Forbo Coral Classic to be laid on the top of existing tiles with transition strip at inner doors

-	-	-
-	-	-
-	-	-
Rev	Description	Date

Revisions

O'Driscoll Lynn Architects
Knockenhoy Business Park,
Sinnottstown Lane,
Wexford, Y35 VAK0
info@odla.ie 053 914 4912 www.odla.ie

client Carlow County Council			
project County Building Interior Alterations, Athy Road Carlow			
title RECEPTION ALTERATIONS 02			
date 16/09/2026	scale 1:50 @ A1	sheet no. A2.2.B T2	rev no. 25-2594