DO NOT SCALE: CONTRACTOR TO CHECK ALL DIMENSIONS AND REPORT ANY OMISSIONS OR ERRORS TO MCCE


PROVIDE FOR 75 X 75 TIMBER POSTS AND HEADER AS GROUNDS FOR DOOR SET IN STUD PARTITION.
ALLOW FOR PACKING VOIDS BETWEEN TIMBER GROUNDS AND DOOR SETS WITH ROCKWOOL MINERAL INSULATION TO MAINTAIN SOUND INSULATION AROUND ALL DOORS;

MALACHI CULLEN
CONSULTING ENGINEERS LTD
8 CENTRE COURT, BLYRY BUSINESS & COMMERCIAL PARK, ATHLONE, CO. WESTMEATH N37 A710
T: 090 6420364 E: info@mcullen.ie W: www.mcullen.ie

Project: FERBANE GS, MAIN ST, FERBANE, CO. OFFALY
Client: OPW
Drawing Title: NEW DOOR DETAILS
Project Number: 21-044
Drawing Number: 04
Rev.
Drawn: AT | DATE: 06/11/2024 | SCALE @ 50 A3

TENDER

FIRE SAFETY SIGNS (ILLUMINATED) PROVIDED TO INDICATE THE POSITION OF FIRE DOORS IN ACCORDANCE WITH BS ISO 3864–1:2011

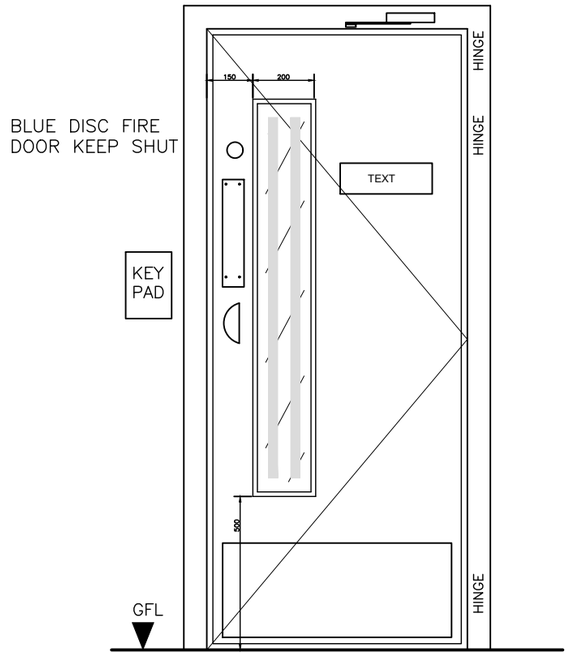

PROPOSED PUBLIC OFFICE DOOR

(ALLOW FOR 1 No. DOOR = LOBBY & PUBLIC OFFICE)

NEW SOLID TIMBER DOOR,HARDWOOD FRAME (30 MIN FD) AND ARCHITRAVE WITH 21mm TK TOUGHENED LAMINATED GLAZING WITH INTERNAL PASTEL PANEL (2 X VERTICAL 30mm WIDE STRIPS) GLAZING VISION PANEL.
DOOR AND FRAME TO RECEIVE APPROVED 3 COATS OF PAINT FINISH COLOUR BLUE.
FRAME FINISHED FLUSH WITH NEW WALL PLASTER
3 No. 100X76X3mm SSS BB EN1935 CLASS 13 304 HINGE
ANTI LIGATURE DOOR HANDLE GRAB PR–4–731A WITH A SATIN STAINLESS STEEL FINISH AND PLATE ON EACH SIDE TO BE FITTED TO CLIENTS REQUIREMENTS
PROVIDE 400mm HIGH STAINLESS STEEL KICK PLATE ON PUBLIC OFFICE SIDE OF DOOR


DOOR STOP TO BE SCREW FIXED TO FLOOR

ALLOW FOR ROOM DOOR ID NAME SATIN STAINLESS STEEL INDICATING "PRIVATE" AS PER CLIENTS REQUIREMENTS

SAMPLE OF IRONMONGERY TO BE APPROVED BY CLIENT

PROVIDE SELF CLOSERS IN ACCORDANCE WITH PART 'M' BUILDING REGULATIONS.

NEW DOOR AND FRAME TO BE TESTED AND CERTIFIED BY AN APPROVED SPECIALIST. MINIMUM 30 MINUTES FIRE RATING (AND SMOKE SEAL) IN ACCORDANCE WITH BUILDING REGULATIONS (PART B) & BS 476. DOORS/FRAMES TO INCLUDE ALL REBATES WITH INTUMESCENT STRIPS, 'KEEP CLOSED' PLATES, ETC. AND FIRE SEALING AROUND FRAME

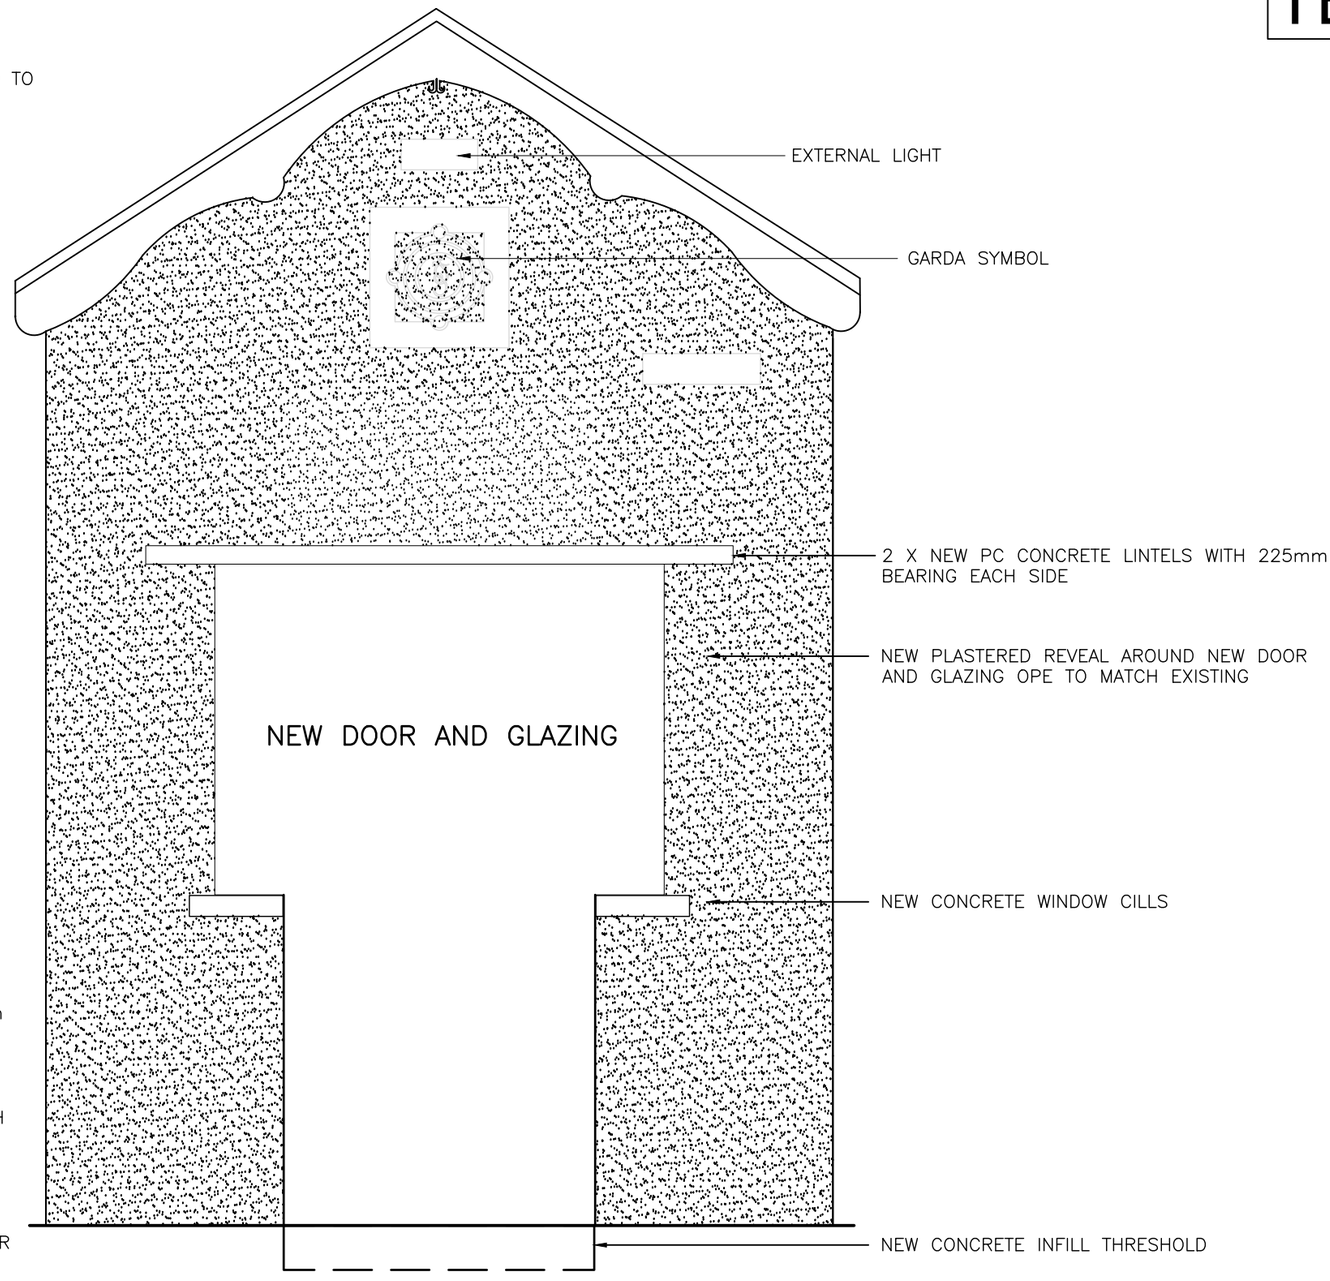

PROPOSED MAIN ENTRANCE DOOR