
JV TIERNEY & CO
MECHANICAL ELECTRICAL & SUSTAINABLE ENGINEERS



Lift Services Builders Works

TIPPERARY COURTHOUSE & BRIDEWELL

CCT-JVT-PH1-XX-XX-SP-L-0003

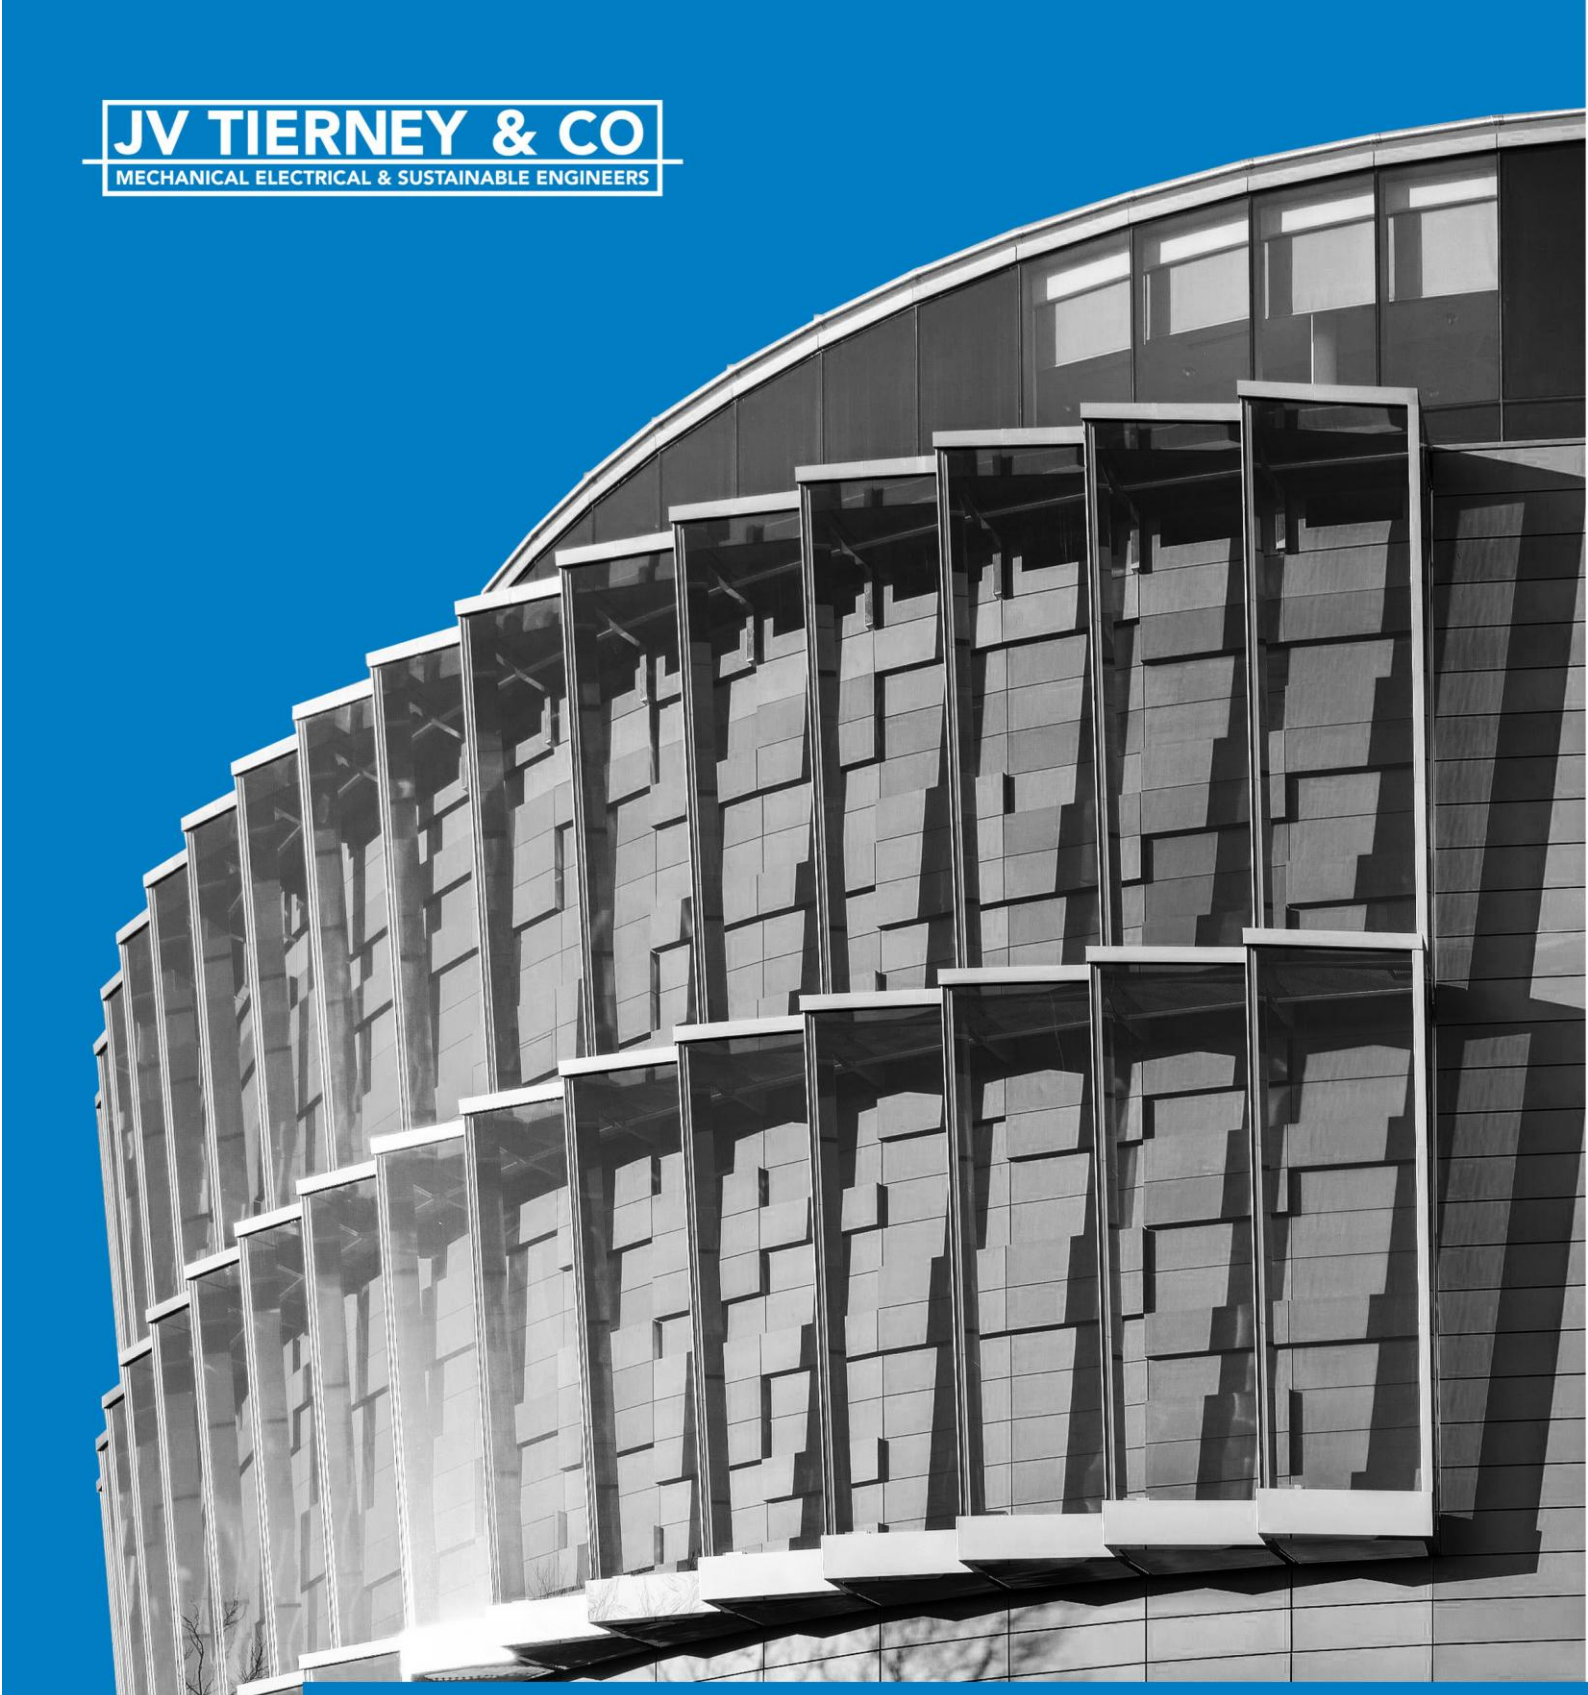

TIPPERARY TOWN COURTHOUSE & BRIDEWELL
PHASE 1

LIFT SERVICES BUILDERS WORKS SCHEDULE

CCT-JVT-XX-XX-SP-L-0003

Description	Issue. No.	Date	Prepared By:	Reviewed by:
P7 – PRE-TENDER	0	30/10/2026	APL	LW

JVT 1948-2023 CELEBRATING 75 YEARS

Directors: J. Lee, S. Walsh, R. Burke, C. Saul, A. Clifford, C. Kelly, D. Conaty
Associate Directors: M. Downey, D. Dowling, E. MacEntee, L. Watson
J.V. Tierney & Company (2002) Limited Trading as J.V. Tierney & Co. Registration No. 422555
Registered Office: 5 Clarinda Park North, Dun Laoghaire, Co. Dublin, A96 W6N1.

NSAI Certified NSAI Certified NSAI Certified NSAI Certified

MEMBER OF ACEI

IGBC IRISH GREEN BUILDING COUNCIL

CLONMEL COURTHOUSE & BRIDEWELL
TIPPERARY

LIFT SERVICES BUILDERS WORKS SCHEDULE
CCT-JVT-XX-XX-SP-L-0003

LIFT SERVICES TENDER DOCUMENTS	
CCT-JVT-PH1-XX-XX-SP-L-0001	Lift Services Specification
CCT-JVT-XX-XX-SP-LT-0001	Lift Services Summary of Tender
CCT-JVT-PH1-XX-XX-SP-L-0002	**Lift Services Builders Works Requirements**

JVT 1948-2023 CELEBRATING 75 YEARS

Directors: J. Lee, S. Walsh, R. Burke, C. Saul, A. Clifford, C. Kelly, D. Conaty
Associate Directors: M. Downey, D. Dowling, E. MacEntee, L. Watson
J.V. Tierney & Company (2002) Limited Trading as J.V. Tierney & Co. Registration No. 422555
Registered Office: 5 Clarinda Park North, Dun Laoghaire, Co. Dublin, A96 W6N1.

QUALITY NSAI Certified | ENVIRONMENT NSAI Certified | HEALTH & SAFETY NSAI Certified | BUILDING INFORMATION MODELLING NSAI Certified

MEMBER OF ACEI

IGBC IRISH GREEN BUILDING COUNCIL

Contents

SECTION 1 : 2 NO. PLATFORM LIFT SERVICES INSTALLATION 4

Item	Description	€
	Section 1 : 2 No. Platform Lift Services Installation	
	The Contractor shall include for the following builder's works for the platform lift installation.	
(A)	Allow for fire sealing around architraves on each landing door for each lift entrance (inclusive of all lifts)	
(B)	Provide opes for floor indicator boxes for all lifts 2no. 300mm x 100mm nominal and making good.	
(C)	Provide opes for landing push boxes, 2 No. 150 x 150 mm and making good.	
(D)	Provide full height scaffolding within the lift shaft.	
(E)	Allow for building in of 2No.door sills at each landing door.	
(F)	Allow for making Lift pit watertight and weatherproof	
(G)	Allow for building in 2 metres long Unistrut channel at 2 m. centres in the lift shaft.	
(H)	Allow for Lift Car flooring in lift car floor 18mm floor.	
(I)	Allow for protective materials / sheeting to protect exposed Lift Equipment, shaft lighting, electrical accessories within the shaft.	
(J)	Allow for liaison and coordination with the Electrical contractor in relation to permanent shaft lighting, phone line and power supply installation to ensure commissioning on project programme	
	TOTAL	