




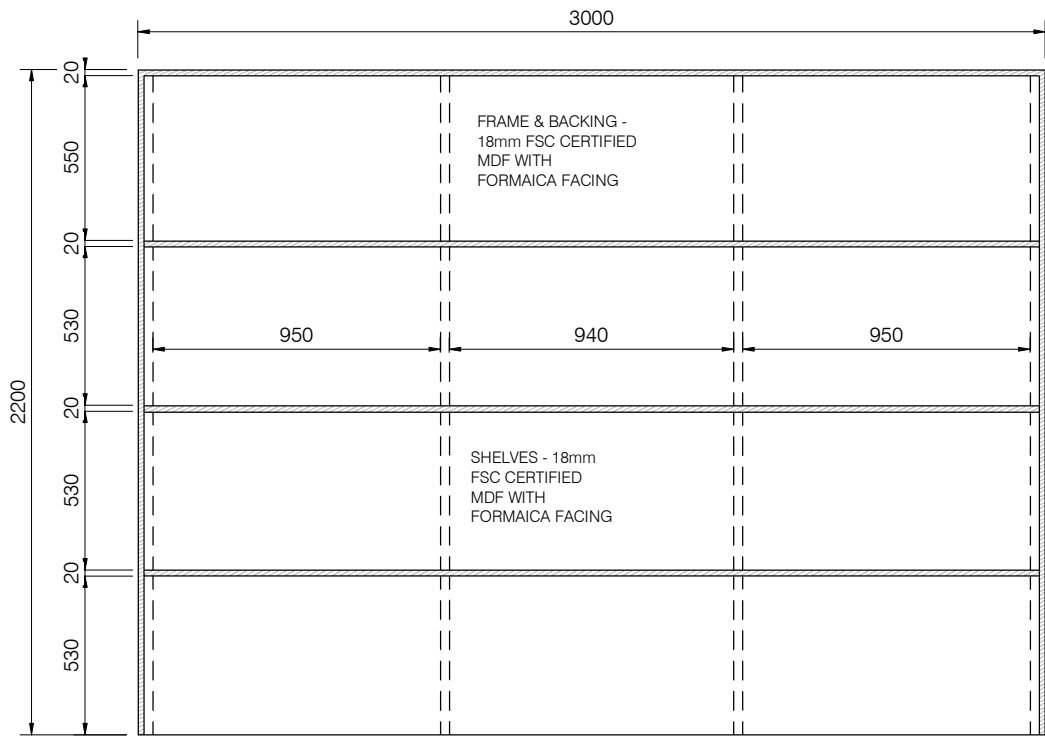


PROPOSED STORAGE UNIT (FRONT SECTION)
SCALE: 1/25

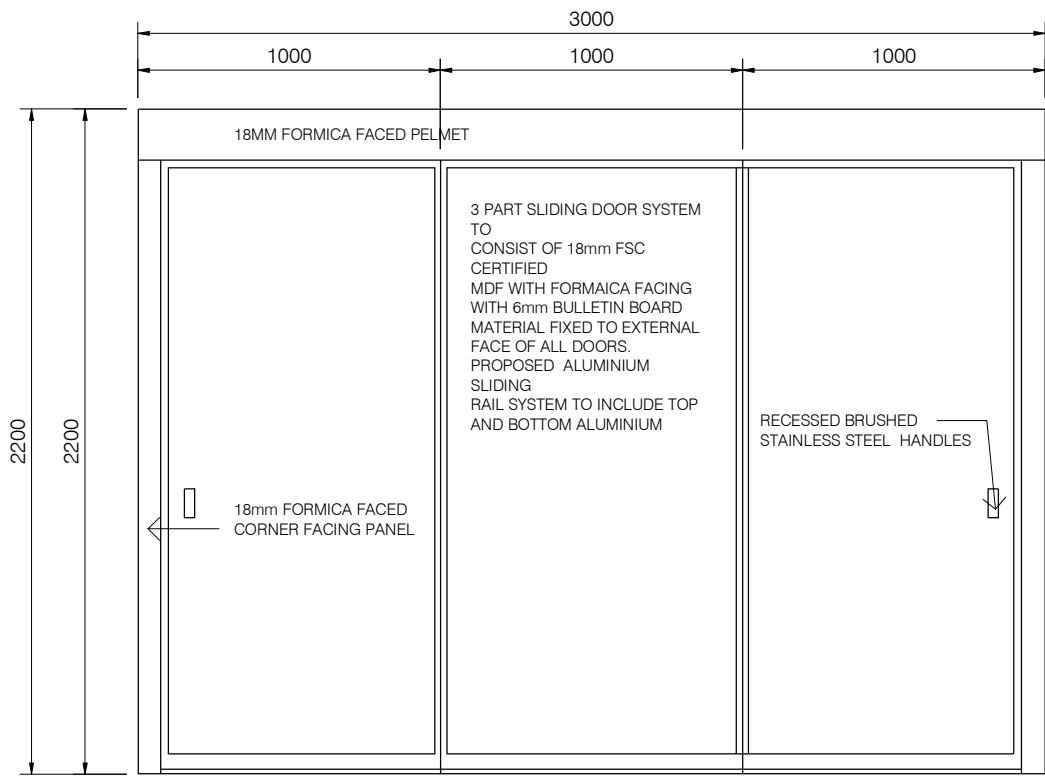


PROPOSED STORAGE UNIT (FRONT ELEVATION)
SCALE: 1/25

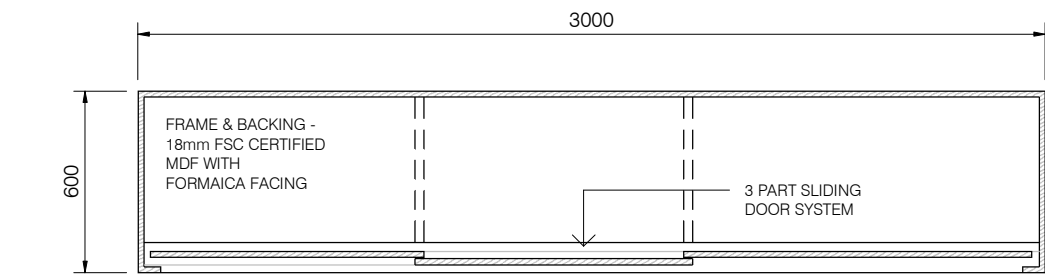

PROPOSED STORAGE UNIT (PLAN)
SCALE: 1/25

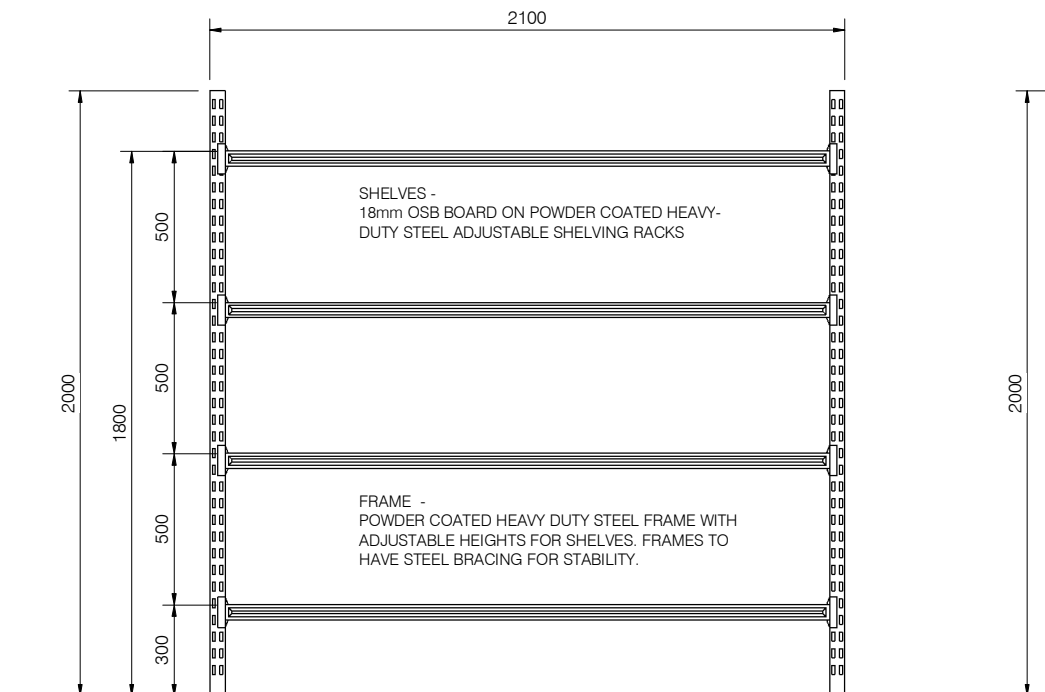


FRONT SECTION

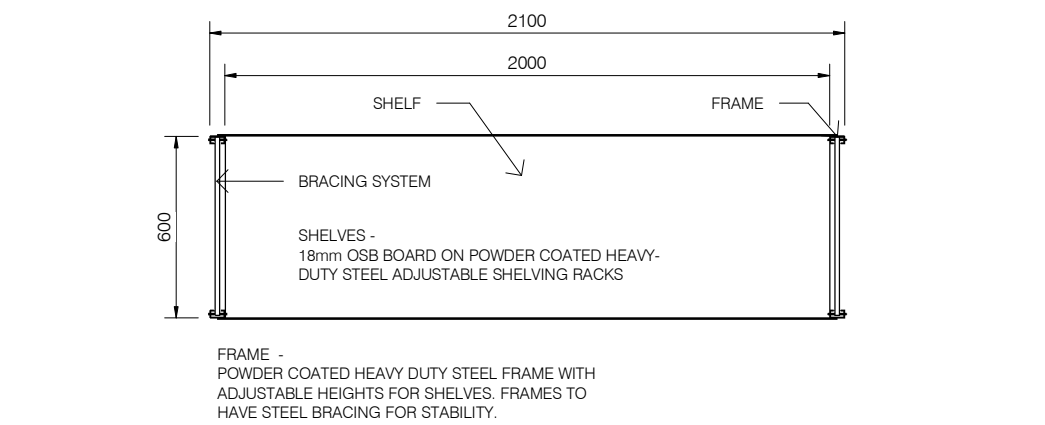


PLAN SECTION

PROPOSED HEAVY DUTY STORAGE UNIT (FRONT SECTION)
SCALE: 1/25

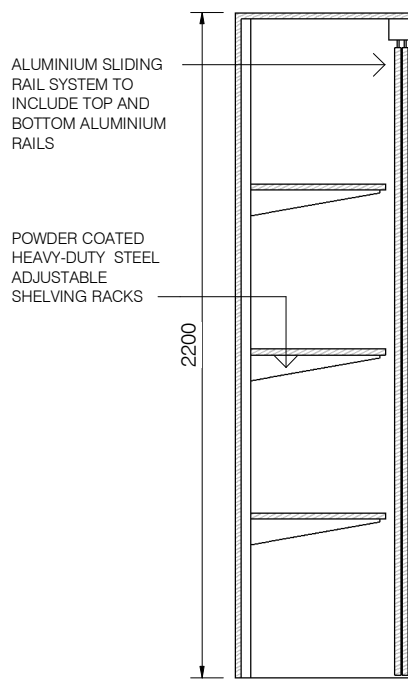

SIDE SECTION

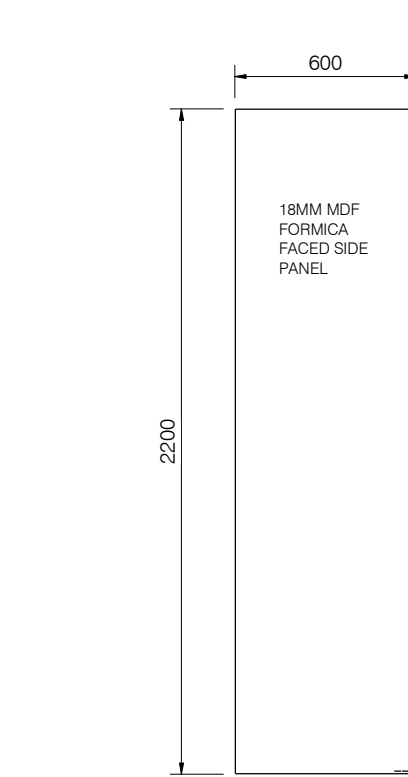

SIDE ELEVATION

CONSTRUCTION OF PROPOSED STORAGE UNITS.

PROPOSED STORAGE UNIT TO BE CONSTRUCTED USING 18mm FSC CERTIFIED MDF WITH FORMICA FACING TO TOP, SIDES AND BACK. COLOUR TBC BY ARCHITECT PRIOR TO MANUFACTURE OF STORAGE UNIT. ALL FRAME FIXINGS TO BE CONCEALED THROUGHOUT.

3NO. SHELVES TO CONSIST OF 18mm FSC CERTIFIED MDF WITH FORMICA FACING, SUPPORTED OFF POWDER COATED HEAVY-DUTY STEEL ADJUSTABLE SHELVING RACKS FIXED TO STORAGE UNIT FRAME.

4 PART SLIDING DOOR SYSTEM TO CONSIST OF 18mm FSC CERTIFIED MDF WITH FORMICA FACING WITH WITH 6mm BULLETIN BOARD MATERIAL FIXED TO EXTERNAL FACE OF ALL DOORS. PROPOSED ALUMINIUM SLIDING RAIL SYSTEM TO INCLUDE TOP AND BOTTOM ALUMINIUM RAILS. 4 NO. RECESSED BRUSHED STAINLESS STEEL HANDLES

THE USE OF MELAMINE FACED CHIPBOARD WILL NOT BE PERMITTED IN ANY CIRCUMSTANCES. UNITS TO COMPLY WITH BS 6222 AND BS EN 1153 & STRUCTURAL PERFORMANCE TO BS 6222:PART 2, GRADE H. SURFACE FINISHES PERFORMANCE TO BS 6222:PART 3 & WORKTOP CLASSIFICATION TO BS 6222:PART 3, TYPE 2.

FORMALDEHYDE LEVELS TO CONFORM TO TYPE CLASS E1 OF PRODUCT STANDARD EN622-1.

FIXED FURNITURE SPECIFICATION NOTES

The provision and installation of Proposed fixed furniture to be provided as per requirements by the Department of Education & Science for a Typical Primary School Classroom as follows:

Refer to Architect's drawings for proposed Kitchenettes, to be read in conjunction with specification above for Kitchen units

Coat rail 3000mm minimum length suitable for 30 no. coats, fixed 1000-1200mm above F.F.L in the mainstream class base in proposed extension.

Open shelving unit consisting of 4000mm of shelving, fixed 1200-1300mm above F.F.L in the mainstream class base in proposed extension.

Storage unit consisting of sliding door system with 6mm bulletin board material fixed to doors and 1100mm of 600mm deep

2400 x 1200mm magnetic white board, fixed 800-900mm above F.F.L, where an interactive board is being supplied (by others) the white board should be reduced to 1200 x 1200mm in the mainstream class base in proposed extension.

1No. 2400 x 1200mm notice board in the mainstream class base in proposed extension.

CLASSROOM KITCHEN UNIT

GRANBERG OR EQUIVALENT SELECT SINK PACK, INSET STAINLESS STEEL 1.2 BOWL AND DRAINER, COMPLETE WITH SANDRINGHAM DUAL CONTROL, SINK 1 TAPHOLE MIXER, 1/2 BASKET STRAINER WASTE RANGE OR EQUAL APPROVED INCLUDING ALL PLUMBING, TRAPS ETC. CONTRACTOR TO MEASURE ON SITE & CONFIRM DIMENSIONS PRIOR TO ORDERING OF MATERIALS.

PROVIDE FOR ALTRIO WHITE ROCK SATINS HYGIENIC WALL CLADDING 300MM SPLASHBACK (PROFILES AND MASTIC AS REQUIRED TO BE SUPPLIED BY CONTRACTOR) COLOUR TO BE AGREED WITH ARCHITECT PRIOR TO ORDER.

BRUSHED 3MM 316 S/S WORKTOP BONDED TO A LAYER ON 18MM FSC CERTIFIED MDF WITH SINK AND HOP FORMED WITHIN (SAMPLE TO BE CONFIRMED BY ARCHITECT)

NOTE: KITCHEN CARCASS TO BE APPROVED SPECIFICATION BY SPECIALIST SUPPLIER ALL DIMENSION TO BE CONFIRMED ON SITE PRIOR TO MANUFACTURE & INSTALLATION

MELAMINE CARCASSING PRIMED AND PAINTED TO SELECTED COLOUR - TO ARCHITECTS APPROVAL INTERNAL SHELVING TO BE ON ADJUSTABLE FITTINGS @ 150MM CENTRES BY HAFELE OR EQUAL APPROVED

PRESS DOORS TO CONSIST OF FORMICA FACED DOORS ON 18MM FSC CERTIFIED MDF (COLOUR TO BE APPROVED), HINGES & PUSH CATCH WITH MAGNETS FOR OPENINGS TO BE PROVIDED BY HAFELE OR EQUIVALENT APPROVED BY ARCHITECT WITH 20MM FORMICA LAMINATE SHELVING & INSIDE LINING

100mm TIMBER BATTEN TO PROVIDE BASE SUPPORT FOR KITCHEN CABINETS AND TO PROVIDE FOR 100mm HIGH ALUMINIUM KICKER AT GROUND FLOOR LEVEL


NOTE: ALL OPENINGS TO BE TO BE PUSH TO OPEN & SOFT CLOSING

KITCHEN UNIT SECTION
SCALE: 1/25

NOTE: KITCHEN CARCASS TO BE APPROVED SPECIFICATION BY SPECIALIST SUPPLIER ALL DIMENSION TO BE CONFIRMED ON SITE PRIOR TO MANUFACTURE & INSTALLATION

BRUSHED 3MM 316 S/S WORKTOP BONDED TO A LAYER ON 18MM FSC CERTIFIED MDF WITH SINK AND HOP FORMED WITHIN

PRESS DOORS TO CONSIST OF FORMICA FACED DOORS ON 18MM FSC CERTIFIED MDF (COLOUR TO BE APPROVED), HINGES AND PUSH CATCH WITH MAGNETS TO BE SOFT CLOSING FOR OPENINGS TO BE PROVIDED BY HAFELE OR EQUIVALENT APPROVED BY ARCHITECT WITH 20MM FORMICA LAMINATE SHELVING & INSIDE LINING

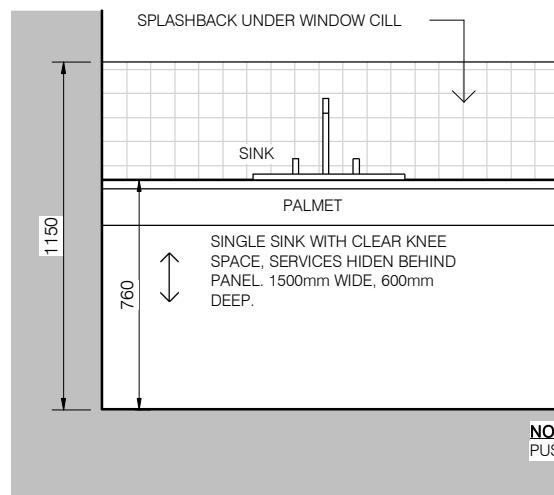

KITCHEN ELEVATION
SCALE: 1/25

NOTE: KITCHEN CARCASS TO BE APPROVED SPECIFICATION BY SPECIALIST SUPPLIER ALL DIMENSION TO BE CONFIRMED ON SITE PRIOR TO MANUFACTURE & INSTALLATION

PROVIDE FOR ALTRIO WHITE ROCK SATINS HYGIENIC WALL CLADDING 300MM SPLASHBACK (PROFILES AND MASTIC AS REQUIRED TO BE SUPPLIED BY CONTRACTOR) COLOUR TO BE AGREED WITH ARCHITECT PRIOR TO ORDER.

BRUSHED 3MM 316 S/S WORKTOP BONDED TO A LAYER ON 18MM FSC CERTIFIED MDF WITH SINK AND HOP FORMED WITHIN (SAMPLE TO BE CONFIRMED BY ARCHITECT)

NOTE: KITCHEN CARCASS TO BE APPROVED SPECIFICATION BY SPECIALIST SUPPLIER ALL DIMENSION TO BE CONFIRMED ON SITE PRIOR TO MANUFACTURE & INSTALLATION

MELAMINE CARCASSING PRIMED AND PAINTED TO SELECTED COLOUR - TO ARCHITECTS APPROVAL INTERNAL SHELVING TO BE ON ADJUSTABLE FITTINGS @ 150MM CENTRES BY HAFELE OR EQUAL APPROVED

PRESS DOORS TO CONSIST OF FORMICA FACED DOORS ON 18MM FSC CERTIFIED MDF (COLOUR TO BE APPROVED), HINGES & PUSH CATCH WITH MAGNETS FOR OPENINGS TO BE PROVIDED BY HAFELE OR EQUIVALENT APPROVED BY ARCHITECT WITH 20MM FORMICA LAMINATE SHELVING & INSIDE LINING

100mm TIMBER BATTEN TO PROVIDE BASE SUPPORT FOR KITCHEN CABINETS AND TO PROVIDE FOR 100mm HIGH ALUMINIUM KICKER AT GROUND FLOOR LEVEL

NOTE: ALL OPENINGS TO BE TO BE PUSH TO OPEN & SOFT CLOSING

CONTRACTOR TO REFER TO GRANBERG OR EQUIVALENT SUPPLIER SPECIFICATION FOR KITCHEN EQUIPMENT AS INDICATED IN APPENDIX FOLDER.

GRANBERG OR EQUIVALENT SELECT SINK PACK, INSET STAINLESS STEEL 1.2 BOWL AND DRAINER, COMPLETE WITH SANDRINGHAM DUAL CONTROL, SINK 1 TAPHOLE MIXER, 1/2 BASKET STRAINER WASTE RANGE OR EQUAL APPROVED INCLUDING ALL PLUMBING, TRAPS ETC. CONTRACTOR TO MEASURE ON SITE & CONFIRM DIMENSIONS PRIOR TO ORDERING OF MATERIALS.

PROVIDE FOR ALTRIO WHITE ROCK SATINS HYGIENIC WALL CLADDING 300MM SPLASHBACK (PROFILES AND MASTIC AS REQUIRED TO BE SUPPLIED BY CONTRACTOR) COLOUR TO BE AGREED WITH ARCHITECT PRIOR TO ORDER.

100mm TIMBER BATTEN TO PROVIDE BASE SUPPORT FOR KITCHEN CABINETS AND TO PROVIDE FOR 100mm HIGH ALUMINIUM KICKER AT GROUND FLOOR LEVEL.

CONTRACTOR TO PROVIDE WITH WALL MOUNTED, MOTORISED HEIGHT ADJUSTABLE COUNTER WITH 150MM DEEP SINK BOWL. COUNTER TO PROVIDE FOR CLEAR SPACE UNDER WORKTOP OF MINIMUM 700MM CLEAR HEIGHT AND 1500MM WIDTH.

CONTRACTOR TO REFER TO GRANBERG OR EQUIVALENT SUPPLIER SPECIFICATION FOR KITCHEN EQUIPMENT AS INDICATED IN APPENDIX FOLDER.

GRANBERG OR EQUIVALENT SELECT SINK PACK, INSET STAINLESS STEEL 1.2 BOWL AND DRAINER, COMPLETE WITH SANDRINGHAM DUAL CONTROL, SINK 1 TAPHOLE MIXER, 1/2 BASKET STRAINER WASTE RANGE OR EQUAL APPROVED INCLUDING ALL PLUMBING, TRAPS ETC. CONTRACTOR TO MEASURE ON SITE & CONFIRM DIMENSIONS PRIOR TO ORDERING OF MATERIALS.

PROVIDE FOR ALTRIO WHITE ROCK SATINS HYGIENIC WALL CLADDING 300MM SPLASHBACK (PROFILES AND MASTIC AS REQUIRED TO BE SUPPLIED BY CONTRACTOR) COLOUR TO BE AGREED WITH ARCHITECT PRIOR TO ORDER.


NOTE: KITCHEN CARCASS TO BE APPROVED SPECIFICATION BY SPECIALIST SUPPLIER ALL DIMENSION TO BE CONFIRMED ON SITE PRIOR TO MANUFACTURE & INSTALLATION

BRUSHED 3MM 316 S/S WORKTOP BONDED TO A LAYER ON 18MM FSC CERTIFIED MDF WITH SINK AND HOP FORMED WITHIN

MELAMINE CARCASSING PRIMED AND PAINTED TO SELECTED COLOUR - TO ARCHITECTS APPROVAL INTERNAL SHELVING TO BE ON ADJUSTABLE FITTINGS @ 150MM CENTRES BY HAFELE OR EQUAL APPROVED

NOTE: PROPOSED KITCHENETTE UNITS TO BE LEFT HAND OR RIGHT HAND, DEPENDING ON ITS LOCATION, REFER TO ARCHITECTURAL SHEET - T100 FOR REFERENCE

CONTRACTOR TO PROVIDE COUNTER WITH 150MM DEEP SINK BOWL. COUNTER TO PROVIDE FOR CLEAR SPACE UNDER WORKTOP OF MINIMUM 700MM CLEAR HEIGHT AND 1500MM WIDTH.

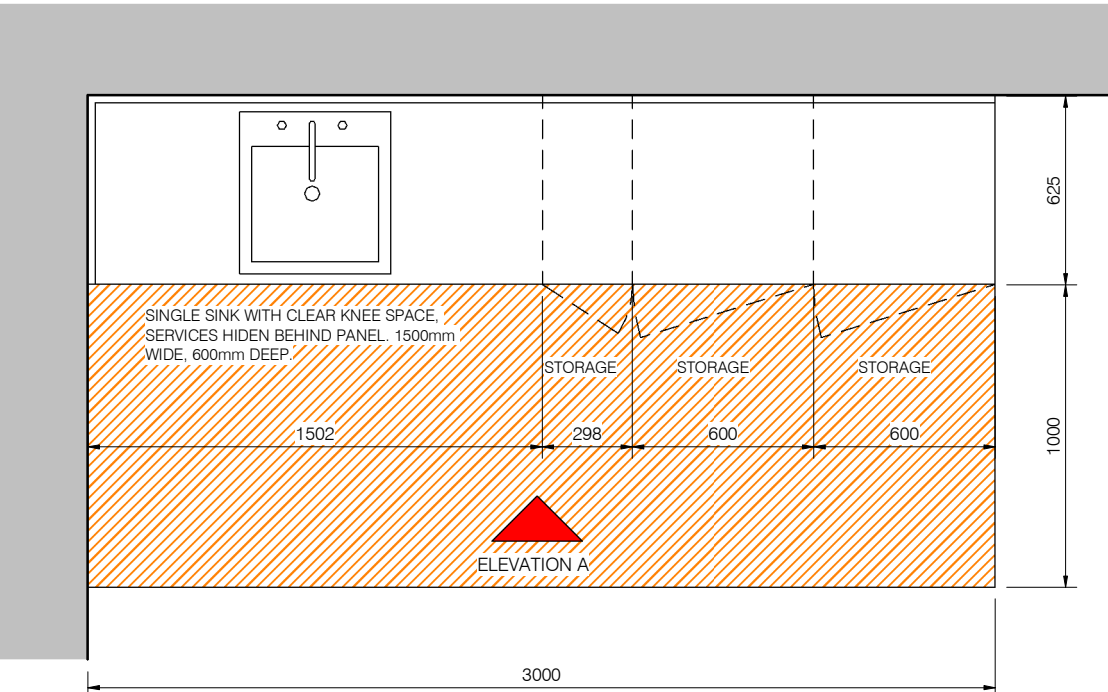

KITCHEN PLAN
SCALE: 1/25

TARGETT GRANIT SAFE T1 TO SELECTED RAIL INDICATED AS DASHED LINE TO PROJECT FROM KITCHEN COUNTER TOP BY 1000mm AS SHOWN ON THE PROPOSED FLOOR FINISH PLAN.

PRESS DOORS TO CONSIST OF FORMICA FACED DOORS ON 18MM FSC CERTIFIED MDF (COLOUR TO BE APPROVED), HINGES AND PUSH CATCH WITH MAGNETS TO BE SOFT CLOSING FOR OPENINGS TO BE PROVIDED BY HAFELE OR EQUIVALENT APPROVED BY ARCHITECT WITH 20MM FORMICA LAMINATE SHELVING & INSIDE LINING