

Pride 50-13

Working Together ● Winning Together

PRODUCT SPECIFICATION

Product name:	Pride 50-13
Model:	Pride-5004E140-PU
Color:	Emerald & Olive Bi-color
Application:	Sports
Roll width:	4.0m/2.0m/3.75m
Roll length:	On request
Warranty:	8 years under CCG warranty terms on fiber

CARPET CHARACTERISTICS

TURF

Pile height:	50mm±5%
Gauge:	5/8inch
Number of strands per tuft:	14 strands
Stitches per 10cm:	13±10%
Stitches per m²:	8190±10%
Total yarn weight:	1270g/m2±10%

BACKING

Primary backing:	PP + PP
Weight:	200g/m2±10%
Secondary backing:	PU
Weight:	800g/m2±10%
Total carpet weight:	2270g/m2±10%


CARPET

Carpet tuft withdrawal:	≥40N
Water permeability of carpet:	>180mm/h

YARN CHARACTERISTICS

Composition:	Monofilament
Tape thickness:	370µm
Tape width:	1.0mm
Composition:	PE
Dtex:	14000
Pile yarns colour change:	4~5
Pile yarn change in tensile strength:	≤50%

Picture for reference:

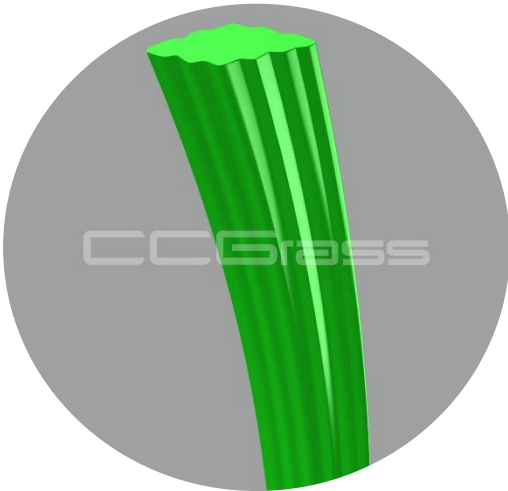

INFILL REQUIREMENTS

Sand

Particle size range:	0.5-1.0mm
Bulk density:	1.46g/cm3
Application rate:	30kg/m2

SBR

Particle size range:	0.63-2.5mm
Bulk density:	0.48g/cm3
Application rate:	7kg/m2

Shock-pad

Shock-pad or elastic layer(if applicable)	YES
---	-----



We reserve the right to modify these specifications. Version 1 – 1712