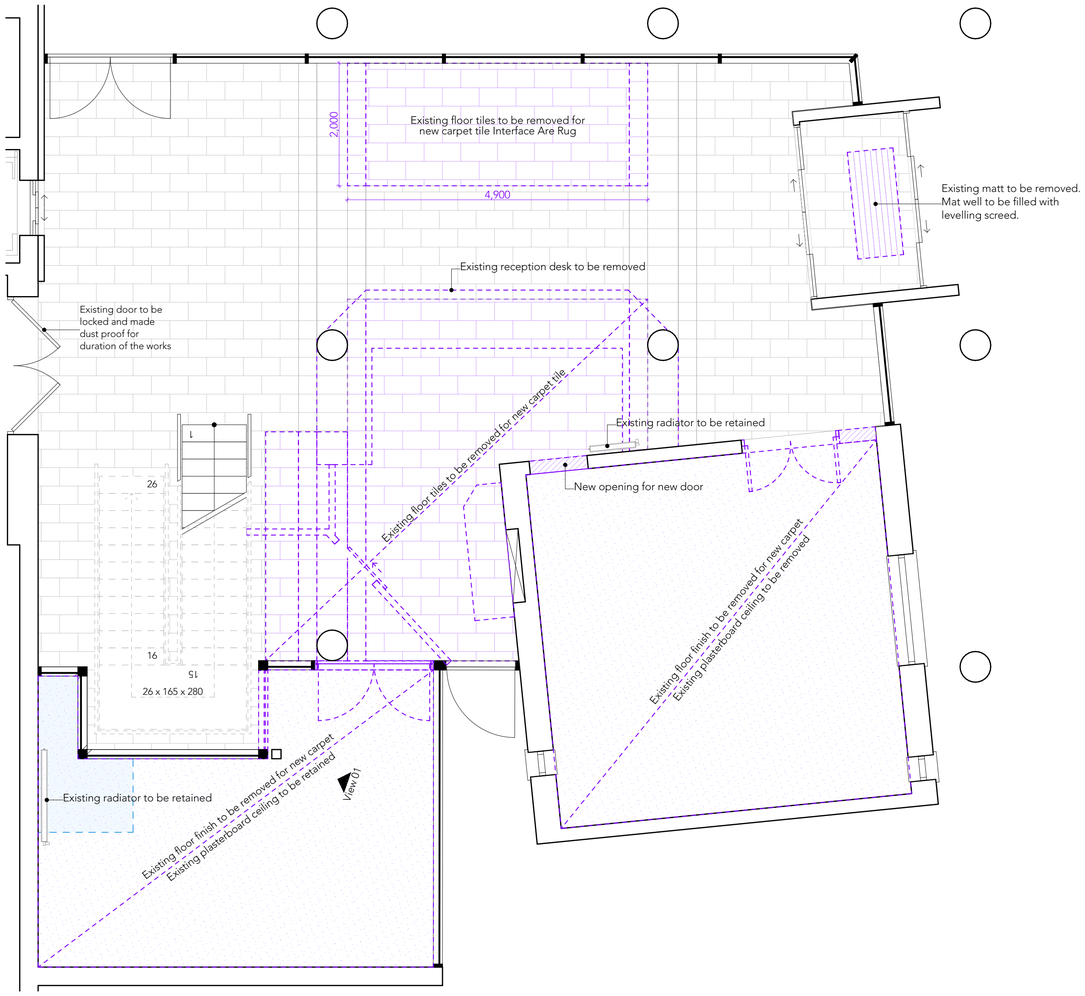

DEMOLITION 1:50

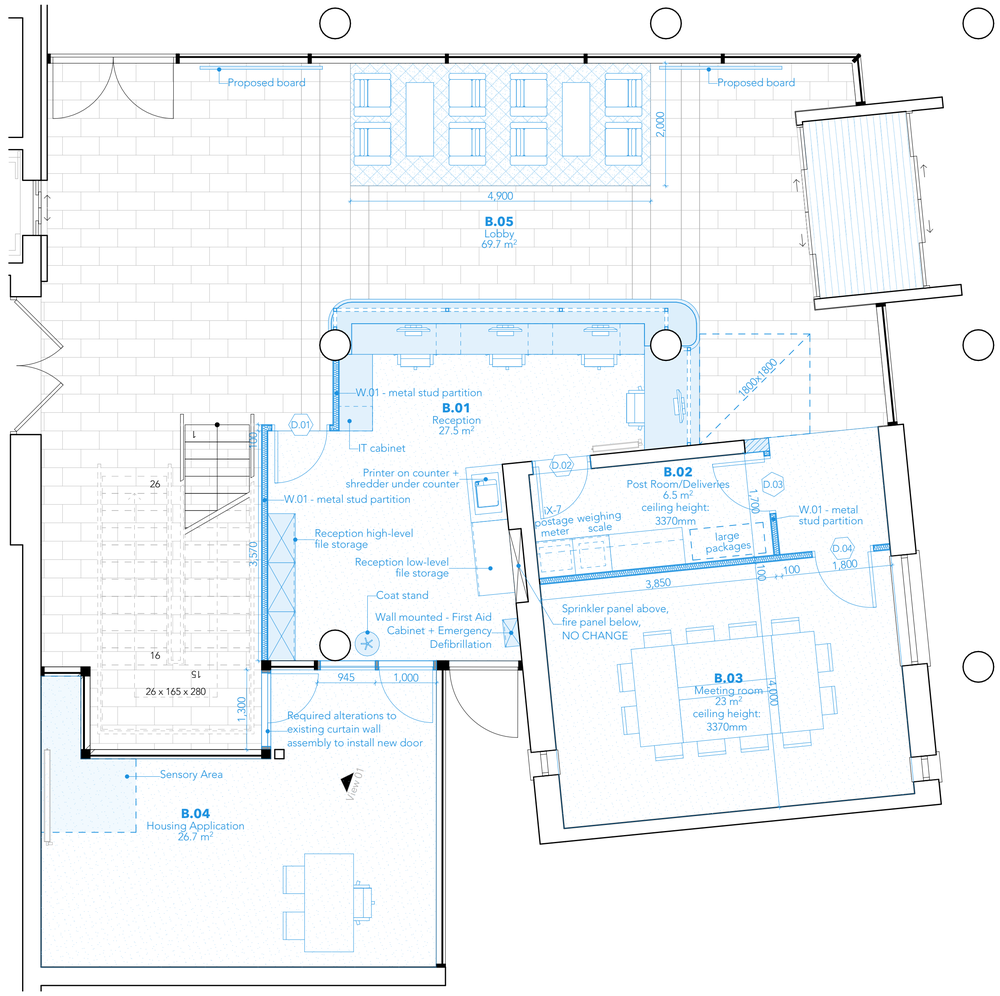

PROPOSED 1:50

View 01 - Existing curtain wall

DOOR SCHEDULE RECEPTION

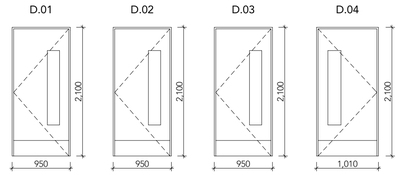

DOOR SCHEDULE

NO	Dimensions		Door Type	Frame material	Ironmongery set	Fire Rating	Self Closing	Notes
	Hight	Width						
D.01	2,100	950	Laminate solid door with vision panel	Hardwood timber frame	B	FD30	Dorma TS72VBC s.s.	150mm kick plate - KCC (KA.9701.SSS)
D.02	2,100	950	Laminate solid door with vision panel	Hardwood timber frame	B	FD30	Dorma TS72VBC s.s.	150mm kick plate - KCC (KA.9701.SSS)
D.03	2,100	950	Laminate solid door with vision panel	Hardwood timber frame	B	FD30	Dorma TS72VBC s.s.	150mm kick plate - KCC (KA.9701.SSS)
D.04	2,100	1,010	Laminate solid door with vision panel	Hardwood timber frame	B	FD30	Dorma TS72VBC s.s.	150mm kick plate - KCC (KA.9701.SSS)

IRONMONGERY

Set **A**

KCC (KA.9700 330) 1x 330x750 push plate per door leaf
KCC (KF.1378.BT.SSS.300x19) 1x pull handle per door leaf
KCC (KH.1001.SSS) 3 no. hinges per door leaf
KCC (KA.9501.SSS) 1 no. floor door stop per door leaf

Set **B**

KCC (KC9130) Cylinder & Turn
KCC (KF.2101.SSS) Escutcheon
KCC (KF.2001.SSS) return lever handle
KCC (KH.1001.SSS) 3 no. hinges per door leaf
KCC (KA.9501.SSS) floor door stop
KCC (KL-1901RAR) mortice lock

Set **C**

KCC (KF.2101.SSS) Escutcheon
KCC (KF.2001.SSS) return lever handle
KCC (KH.1001.SSS) 3 no. hinges per door leaf
KCC (KA.9501.SSS) floor door stop
KCC (KL-70019S) bathroom lock
KCC (KF8207D) thumb turn w/ indicator

Rev	Description	Date
-	-	-
-	-	-
-	-	-
-	-	-

Revisions

O'Driscoll Lynn Architects
Knockenhoy Business Park,
Sinnottstown Lane,
Wexford, Y35 VNK0
info@odla.ie 053 914 4912 www.odla.ie

Tender

client **Carlow County Council**

project **County Building Interior Alterations, Athy Road Carlow**

title **RECEPTION ALTERATIONS 01**

date	scale	sheet no.	rev no.
09/09/2026	**1:50 @ A1**	**A2.1.B T1**	
drawn by **KM**	file **25-2594**		