
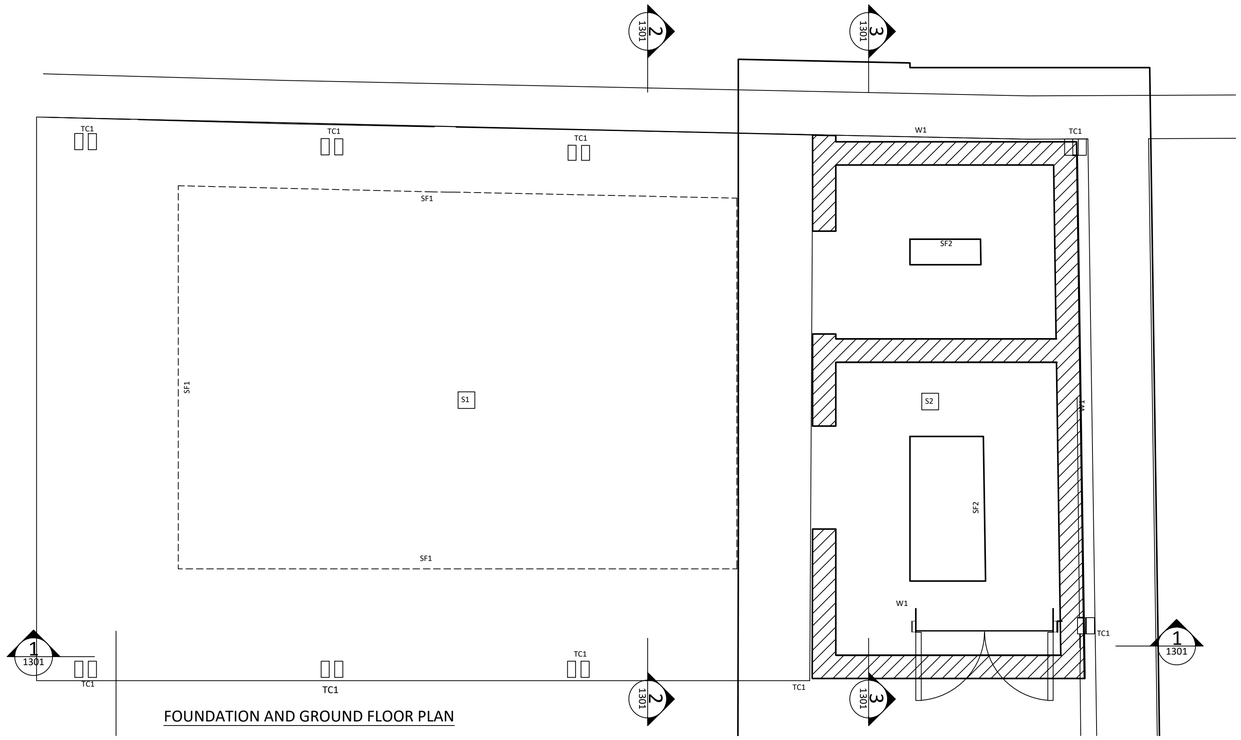


FOUNDATION AND GROUND FLOOR PLAN

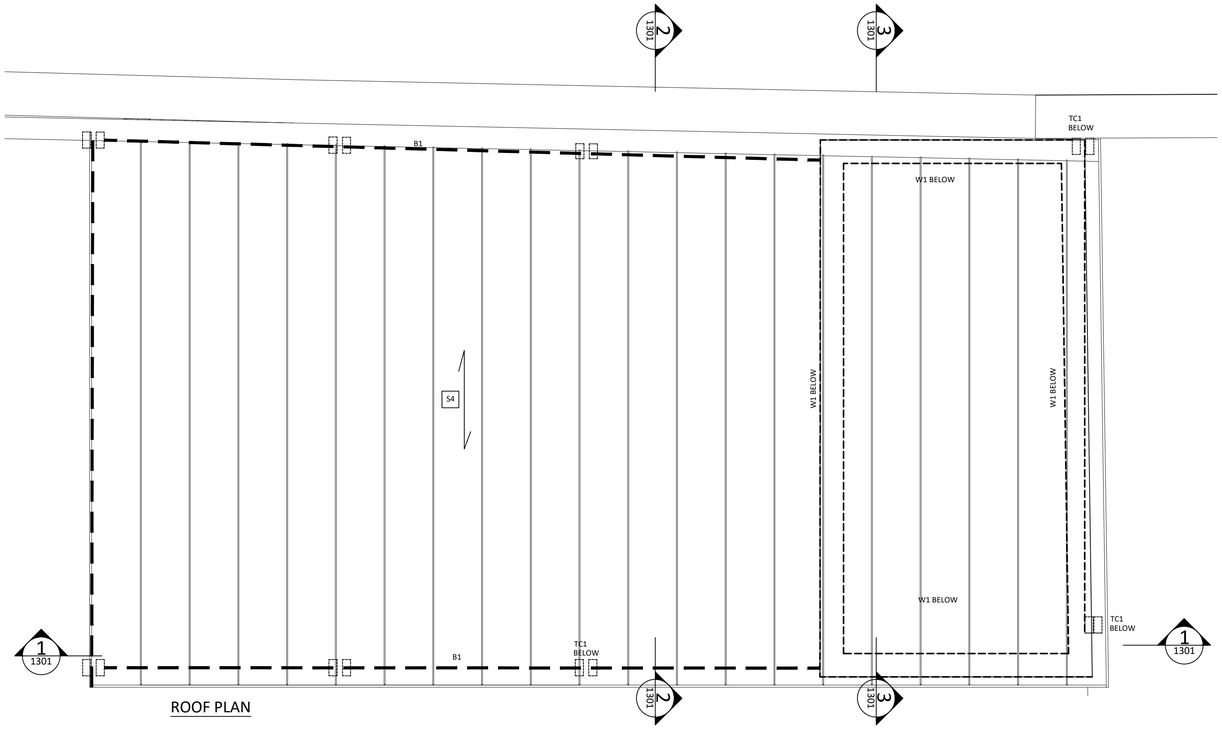

ROOF PLAN

FOUNDATION SCHEDULE

SF1 - 600x300 - 450 STRIP FOOTING TO FULL PERIMETER

SF2 - 900x300DP STRIP FOOTING TO PERIMETER OF PLANT ROOM

WALL SCHEDULE

W1 - 215 LOAD BEARING MASONRY WALL

COLUMN SCHEDULE

TC1 - 2NO. 75x150 TIMBER SECTIONS BOLTED TOGETHER AT 600c/c. STAINLESS STEEL SHOE TO BE PROVIDED FOR FIXING OF TIMBER POSTS TO CONCRETE SLAB

SLAB LEGEND

S1 - 150DP RC SLAB WITH 1 LAYER A393 MESH WITH 2 LAYERS TO THICKENING. ALL ON MINIMUM 225 WELL COMPACTED GRANULAR FILL TO SPECIFICATION

S2 - 150DP RC SLAB WITH 1 LAYER A393 MESH ON MINIMUM 225 WELL COMPACTED GRANULAR FILL TO SPECIFICATION

S4 - 50x225DP ROOF JOISTS AT 400c/c WITH PLYWOOD SHEETING ABOVE. ROOF BUILD-UP AND FINISHES TO ARCHITECTS DETAIL

S5 - 50x225DP ROOF JOISTS AT 400c/c

BEAM SCHEDULE

B1 - 3No. 50x225 JOISTS EDGE BEAM

REFERENCE NOTE

REFER SECTION AND ELEVATION FOR O708-XX-ZZ-DR-S-1301

- THIS DRAWING TO BE READ IN CONJUNCTION WITH ALL OTHER RELEVANT DESIGN TEAM DRAWINGS AND SPECIFICATIONS.
- FOR SETTING OUT REFER TO ARCHITECT'S DRAWINGS. DO NOT SCALE THIS DRAWING. USE FIGURED DIMENSIONS ONLY.
- NO PART OF THIS DOCUMENT MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR STORED IN ANY RETRIEVAL SYSTEM OF ANY NATURE WITHOUT THE WRITTEN PERMISSION OF O'CONNOR SUTTON CRONIN AS COPYRIGHT HOLDER EXCEPT AS AGREED FOR USE ON THE PROJECT FOR WHICH THE DOCUMENT WAS ORIGINALLY ISSUED.

Rev No.	Date	Revision Note	Drn by	Chkd by
P01	19/02/25	STAGE COMPLETE - TENDER	NP	IC
P02	04/04/26	LAYOUT UPDATED TO MATCH ARCHITECTS	IC	IC
P03	03/11/26	PHASING INDICATED - SUITABLE FOR STAGE APPROVAL - TENDER	BP	IC

Rev No.	Date	Revision Note	Drn by	Chkd by

OCSC
O'CONNOR SUTTON CRONIN
MULTIDISCIPLINARY CONSULTING ENGINEERS
Civil / Structure / Environmental / Mechanical / Electrical / Sustainability
Dublin Office: 9 Prussia Street, Dublin 7. D07 KT57.
Tel: +353 (0)1 8682000 Web: www.ocsc.ie
Dublin · London · Belfast · Galway · Cork · Birmingham

Client: TIPPERARY COUNTY COUNCIL
Project: TIPPERARY COURTHOUSE & BRIDEWELL

Title: PROPOSED SHELTER & PLANT
FOUNDATION GROUND FLOOR AND ROOF PLAN

Code	Originator	Zone	Level	Type	Role	Number	Status	Revision
O708	OCSC	XX	ZZ	DR	S	1300	S4	P03

Date:Feb'25 Scale @ A0: 1:20 Drn by:NP Chkd by:IC Aprvd by:PH