
Cork County Council
Comhairle Contae Chorcaí

Coastal Management Unit

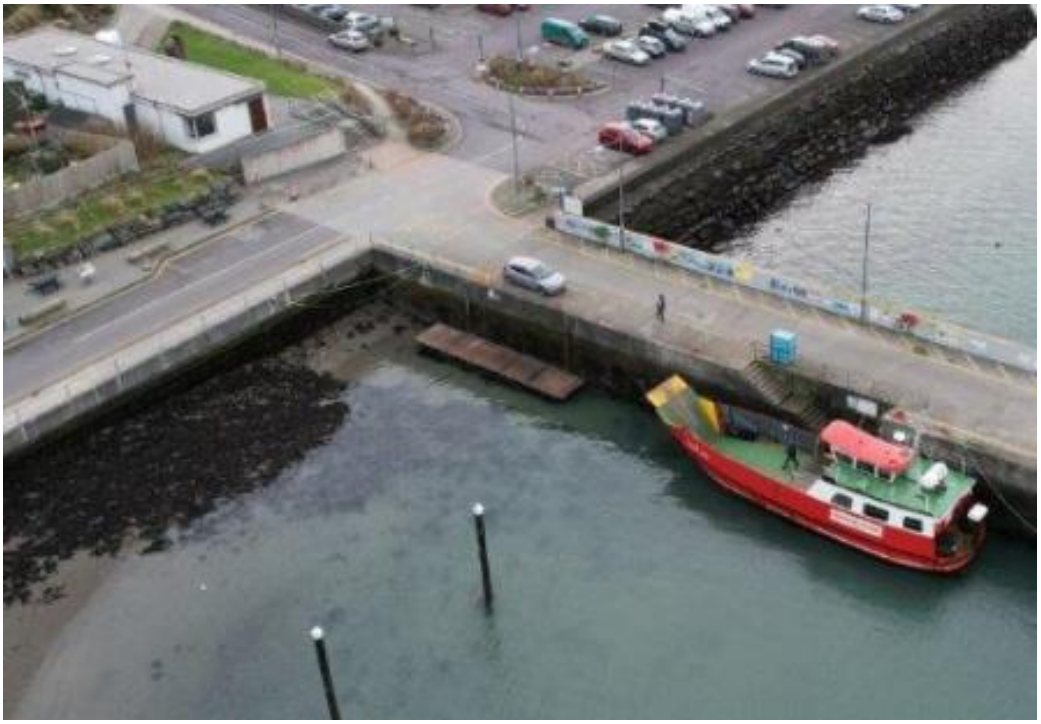

Baltimore Ferry Pier Pontoon
LAMIS 2026

VOLUME C – PRICING DOCUMENT

June 2026

Baltimore Ferry Pontoon LAMIS 2026

Item	Description	Unit	Quantity	Rate €	Amount €	Sub-Total
1	Acceptance of appointment as Project Supervisor for the Construction Stage in accordance with current Health & Safety Regulations.	Item	1		€ -	
2	EL & PL Insurances	sum	1		€ -	
3	Welfare Facilities in compliance with Safety & Welfare at Work Act	sum	1		€ -	
4	General Site mobilisation and demobilisation.	Item	1		€ -	
5	Erection of site boundary fencing surrounding Works Areas. The fencing shall prevent the entry of unauthorised persons to the site.	Item	1		€ -	
6	Mobilistaion of plant & Equipment - including Delivery - offloading new pontoons	Item	1		€ -	
7	Taking all necessary measures to protect the environment.	Item	1		€ -	
8	Traffic Safety and Management for the duration of the works	Item	1		€ -	
9	Liaison with CCC staff and other relevant statutory agencies	Item	1		€ -	
10	Allowance for working in Tidal waters & provision of safety boat for installation of D-fenders & Pontoons	Item	1		€ -	**€ -**
	PONTOON & MOORING SYSTEMS					
11	Supply of walkway units with mooring points, 500mm freeboard and 150DD fender on one side and hardwood timber fendering (150x45mm) on both ends with connections and plain pink GRC deck. Standard 2.4m wide walkway	m	12		€ -	
12	Supply of Heavy-Duty Grounding Brackets per float	No.	4		€ -	
13	UC H-Piles 4.8 m x 254mm x 254mm c/w fixing plates and bracketry	No.	3		€ -	
14	Supply of Piles brackets/guides	No.	3		€ -	
15	Supply of Standard anodised aluminium cleats including galvanised steel bolts	No.	6		€ -	
16	Supply of safety ladder	No.	1		€ -	
17	Supply of Lifebuoy (incl. cabinet, cover & stand)	No.	1		€ -	
18	Installation including the following; • Removal of existing pontoon and H piles • Install of new H piles • Install of 12m x 2.4m pontoon • Install of UC Pile brackets • Install of Ladder • Install of Lifebuoy	sum	1		€ -	
19	Disconnect existing pontoon from pile rails and tow to mooring in Baltimore Harbour	sum	1		€ -	
20	Removal of existing piles and transport to the Harbour Masters yard in Baltimore.	sum	1		€ -	
21	Adjustment /Additional items not included above but listed in Works Requirements	sum	1		€ -	**€ -**
	Total lump sum price (excl VAT)					**€ -**
		VAT @ 13.5%				€ -
	Total lump sum price (including VAT)					**€ -**