




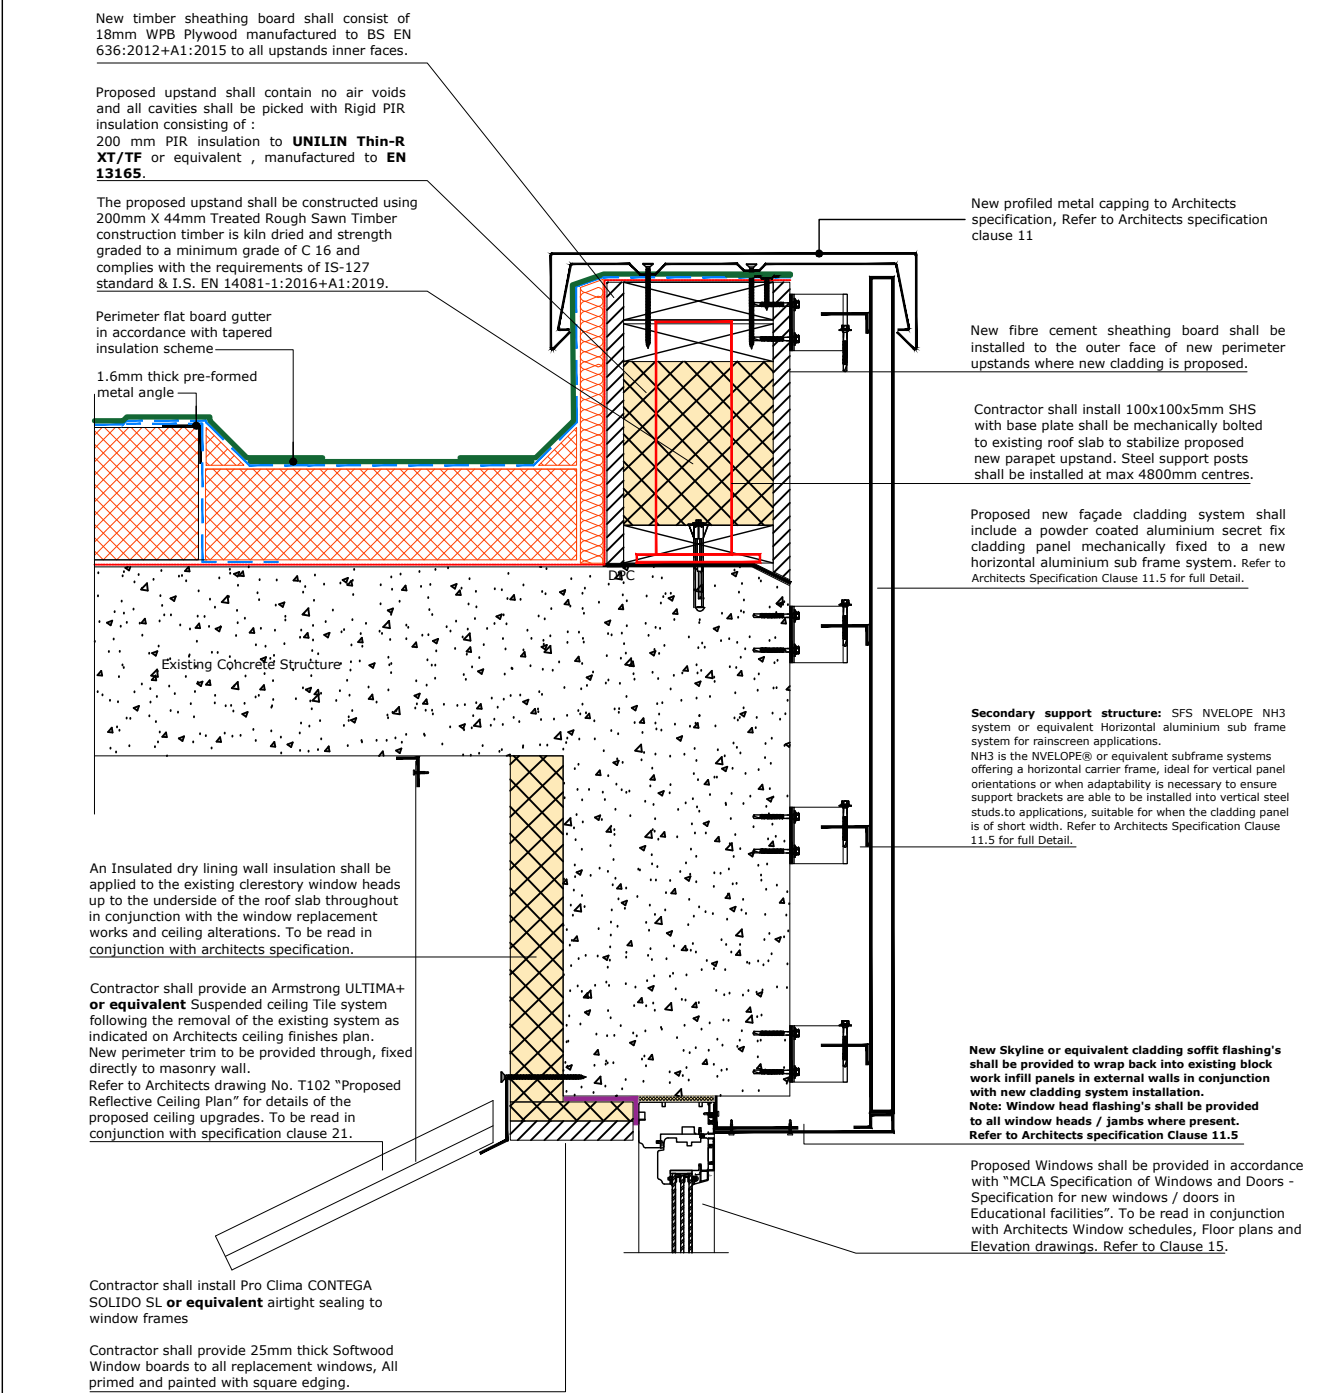

DETAIL 01 - PROPOSED PERIMETER UPSTAND WITH CLADDING (CLERESTORY WINDOWS)
SCALE 1:5

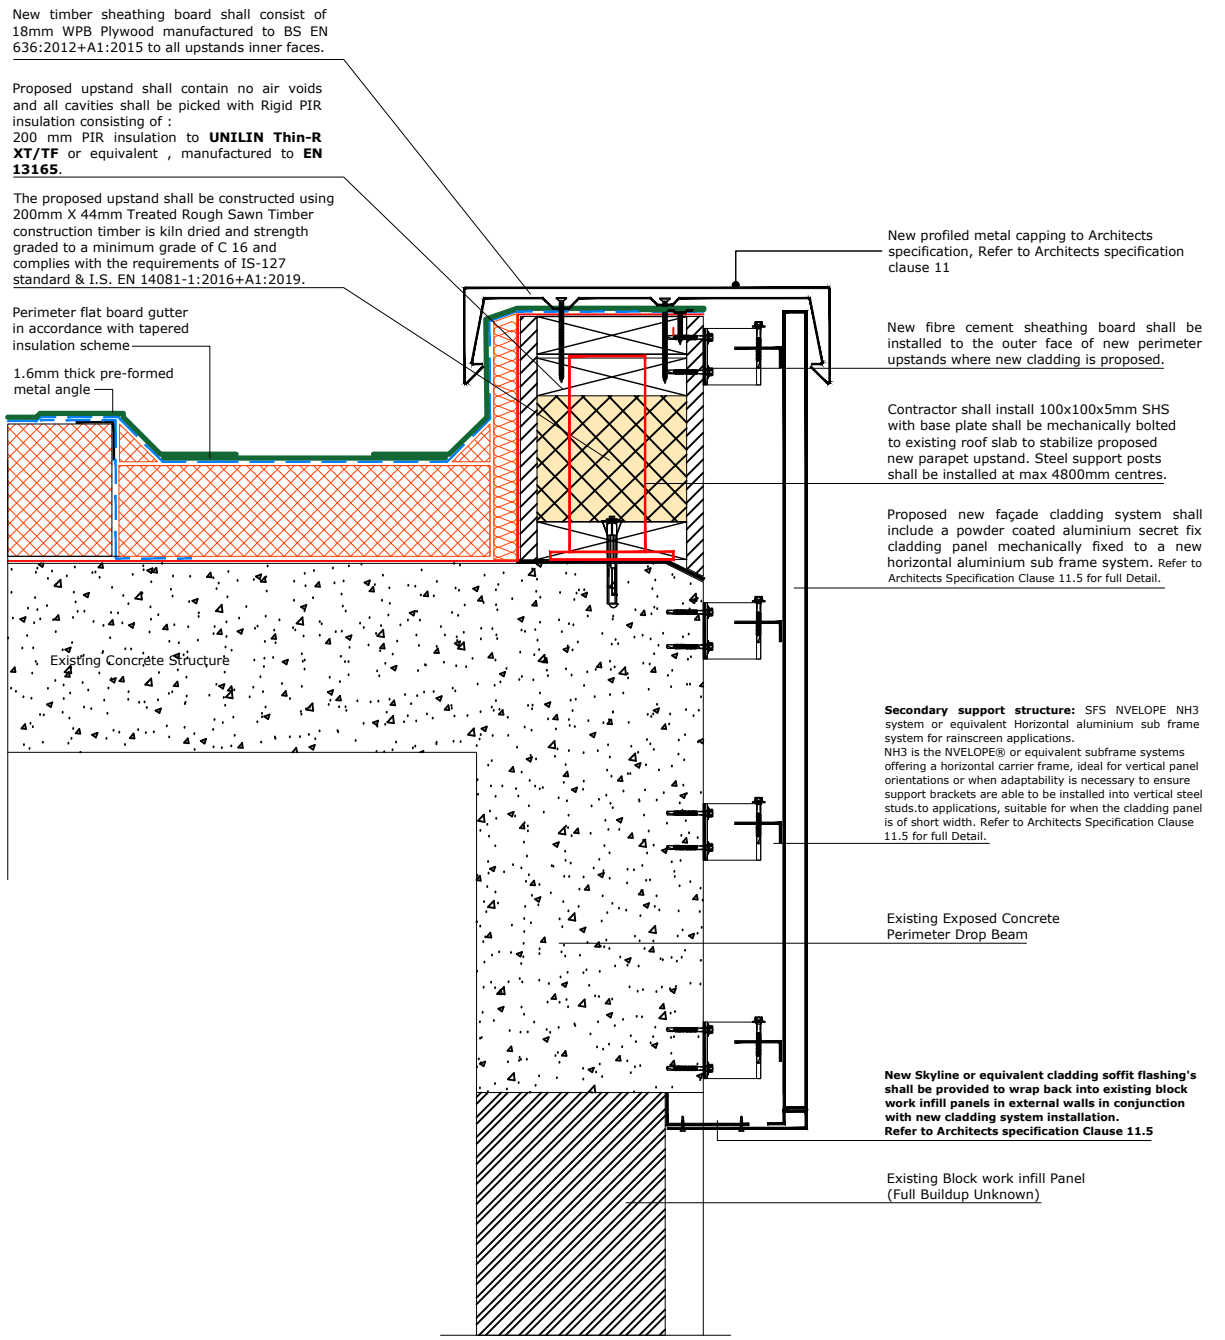


DETAIL 02 - PROPOSED PERIMETER UPSTAND WITH CLADDING (LOW LEVEL EXPOSED CONCRETE PERIMETER BEAMS)
SCALE 1:5

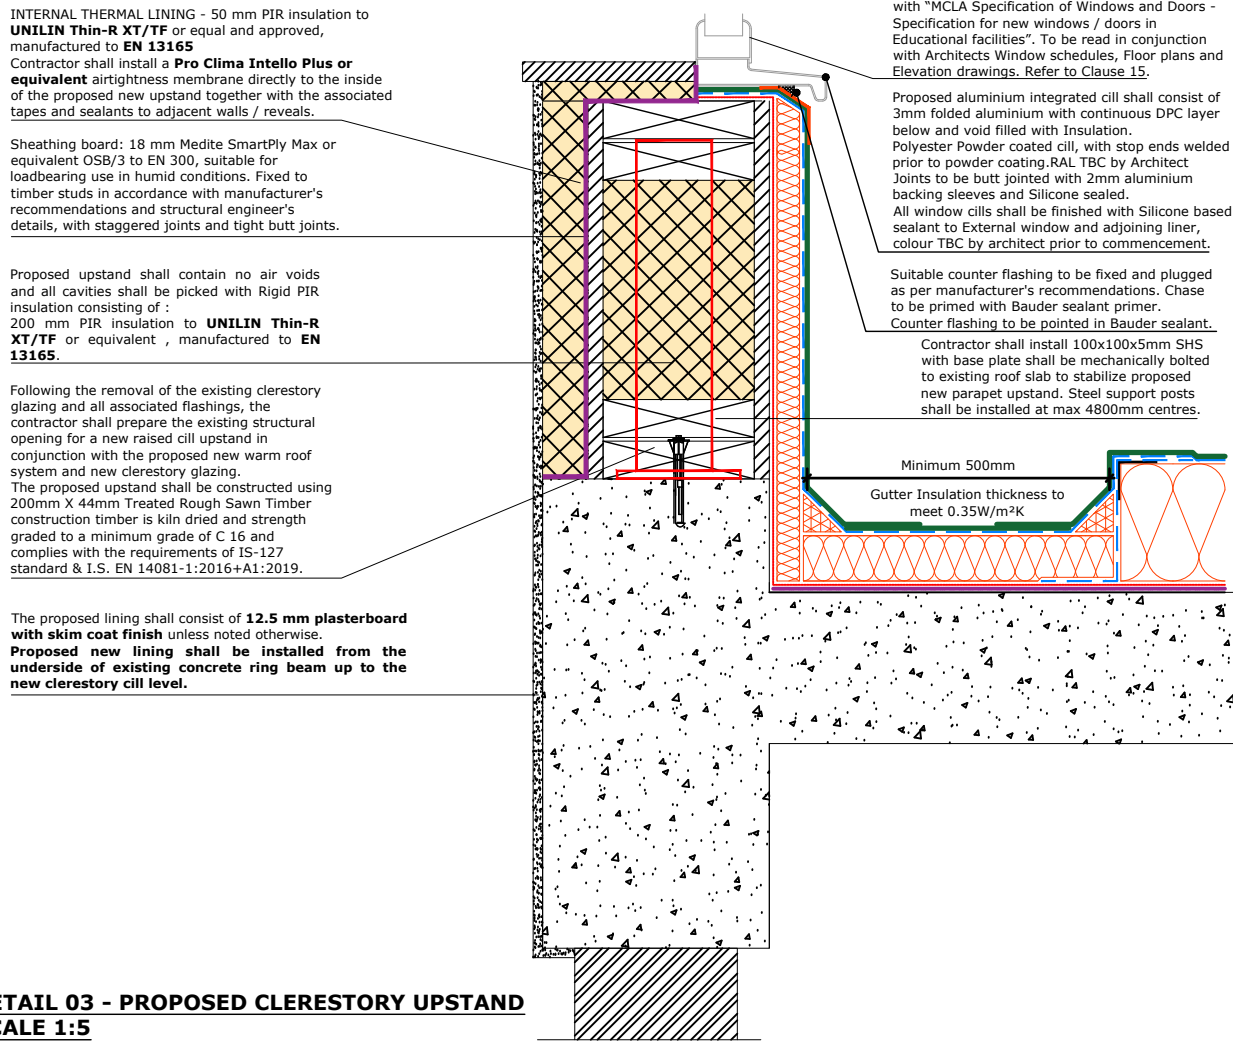

DETAIL 03 - PROPOSED CLERESTORY UPSTAND
SCALE 1:5

Proposed windows shall consist of Triple glazed polyester powder coated, commercial grade, thermally broken aluminium windows. **U-value shall achieve 1.2 W/m²K**

Proposed aluminium integrated cill shall consist of 3mm folded aluminium with continuous DPC layer below and void filled with Insulation.

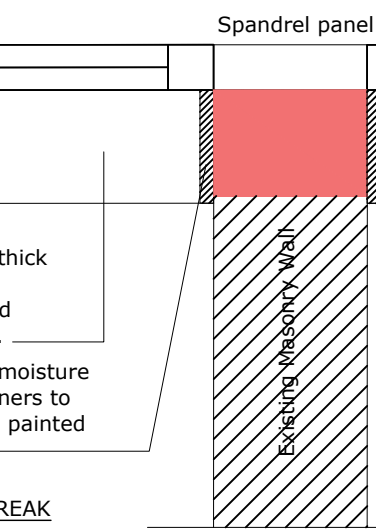


Contractor shall provide 25mm thick Softwood Window boards to all replacement windows, All primed and painted with square edging.

Contractor shall provide 18mm moisture resistant painted MDF window liners to all new windows, all primed and painted with square edging.

DETAIL 04- ACOUSTIC / FIRE BREAK (AT CLERESTORY WINDOW)
SCALE 1:5

FirePro® Flex Seal Coated Strip or equivalent shall be installed to all clerestory window / internal wall junctions to provide acoustic and fire protection between spaces. To be installed to manufactures guidance. Refer to Spec Clause 15.7 in conjunction with Sheet T101 - Glazing Plan for location of acoustic / fire protection.

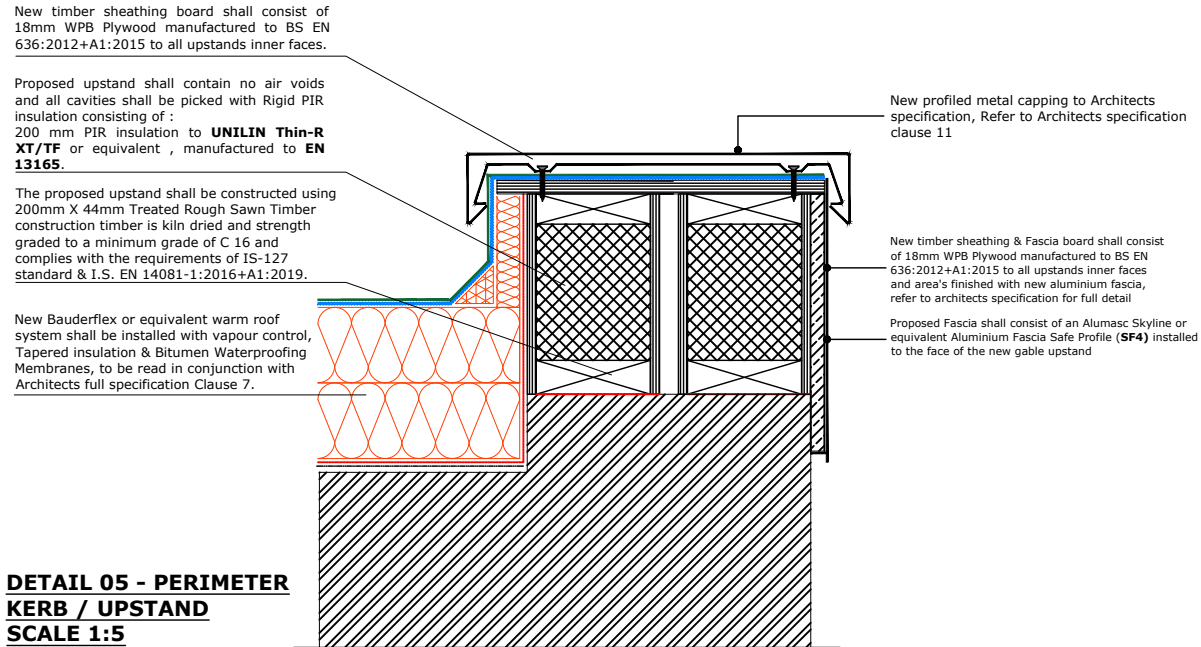

DETAIL 05 - PERIMETER KERB / UPSTAND
SCALE 1:5

IMPORTANT NOTE:
This Drawing Shows Alternative Options. For the Correct Solution to be Used, Refer to the Project Specific Specification.

COMBUSTIBLE SUBSTRATES:
The details contained within this drawing are deemed to be 'Safe to Torch' when using the Bauder Self-adhesive Vapour Control Layer subject to adequate risk assessments.

DETAIL LEGEND

Bauder or equivalent Capping Sheet	
Bauder or equivalent Underlayer	
Bauder or equivalent Insulated Fillet	
Bauder or equivalent Insulation	
Bauder or equivalent Air and Vapour Control Layer (Use Bauder Self Adhered Vapour Control Layer on Combustible Substrates)	
Bauder or equivalent Random Nailed Layer used on TIMBER <u>BOARDED DECKS ONLY</u>	
Deck / Substrate	
Code 4 Lead Flashing	

MCLA TENDER PURPOSES ONLY