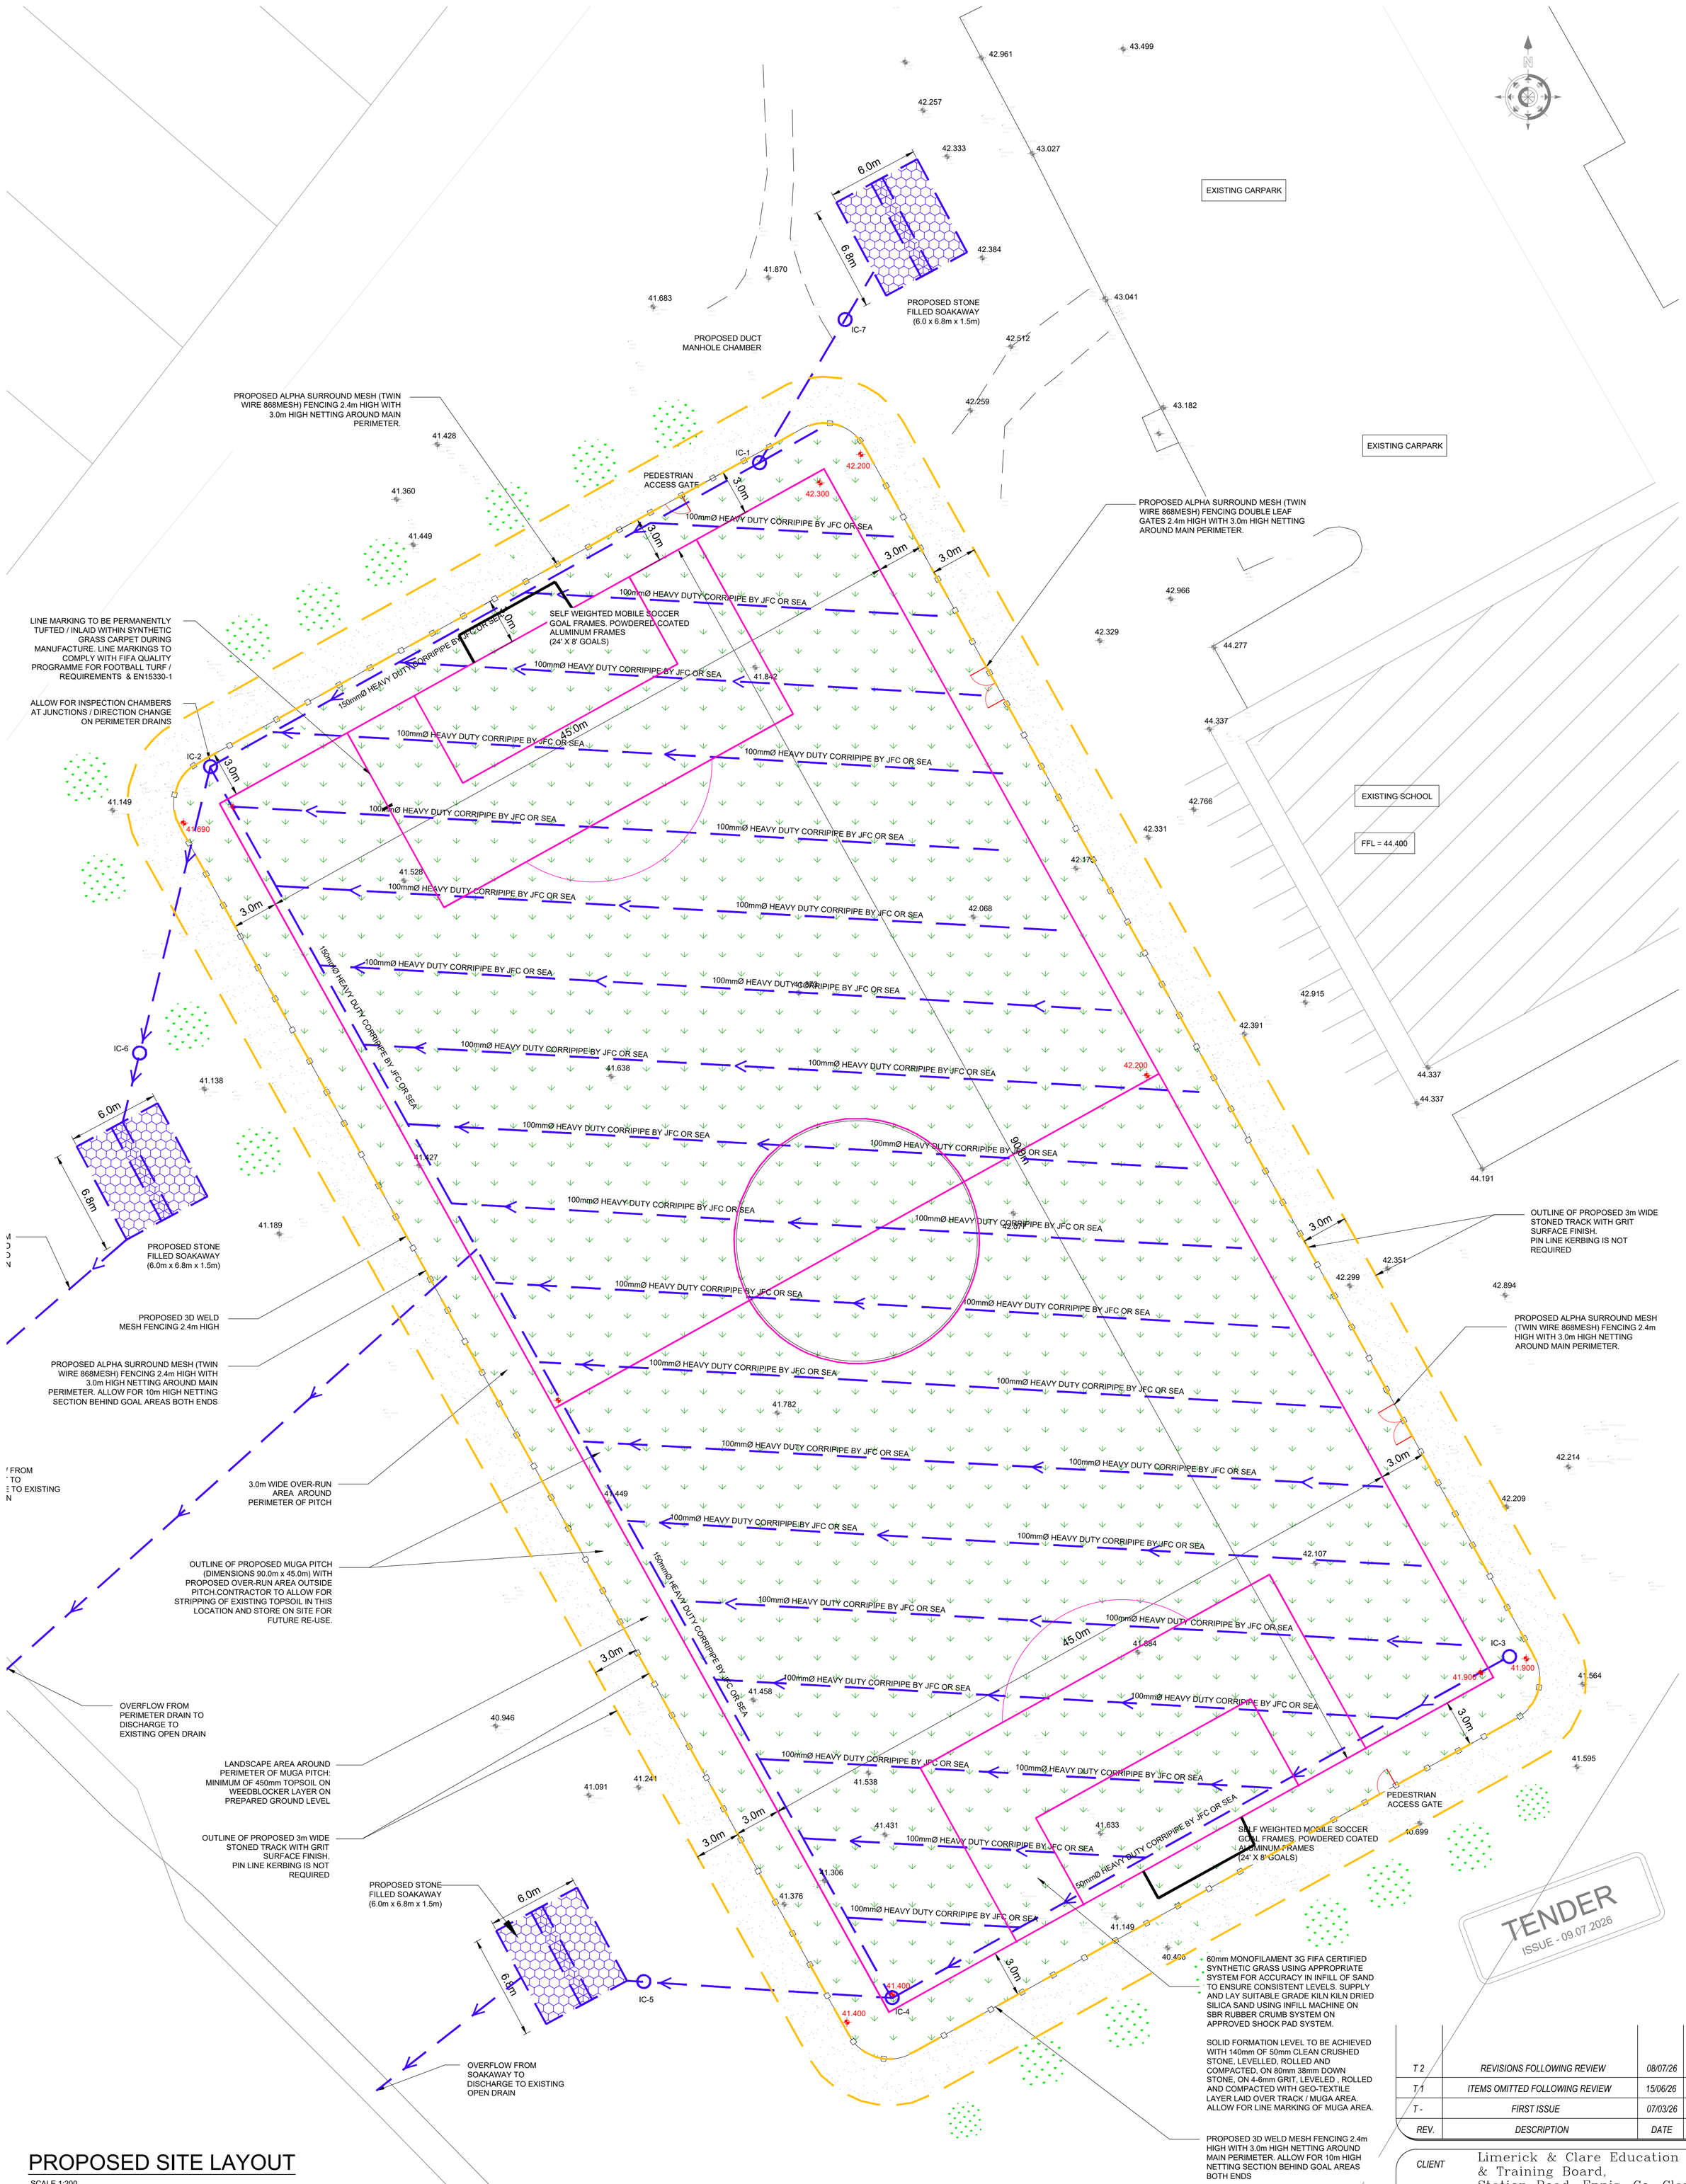

TENDER
ISSUE - 09.07.2026

PROPOSED SITE LAYOUT

SCALE 1:200

GENERAL NOTES

1. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL RELEVANT ENGINEERS,ARCHITECTS AND SERVICE ENGINEERS DRAWINGS AND SPECIFICATION.
2. DO NOT SCALE USE FIGURE DIMENSIONS ONLY.
3. ALL LEVELS ARE STRUCTURAL UNLESS NOTED OTHERWISE.
4. ALL DRAWINGS TO BE CHECKED BY THE CONTRACTOR PRIOR TO THE COMMENCEMENT OF WORKS AND PRIOR TO COMMENCEMENT OF ANY MATERIALS BEING ORDERED AND ANY DISCREPANCIES TO BE BROUGHT TO THE ATTENTION OF THE DESIGNERS IMMEDIATELY.
5. THE CONTRACTOR IS RESPONSIBLE FOR THE TEMPORARY SUPPORT OF ALL WORK.

ALL FILL MATERIAL TO COMPLY WITH SPECIFICATION FOR ROAD WORKS SERIES 800 (NRA)

ALL EXCAVATIONS AND ROCK BREAKING TO BE CARRIED OUT IN STRICT ACCORDANCE WITH THE SPECIFICATION AND IN STRICT ACCORDANCE WITH SERIES 600, SPECIFICATIONS FOR ROADWORK'S AS PUBLISHED WITH THE NRA

NOTES:

ALL TENDER DRAWINGS TO BE READ IN CONJUNCTION WITH SPECIFICATION PROVIDED

CONTRACTOR TO VISIT SITE AND ASSESS THE EXISTING SERVICES IN AREA , PERIMETER OF EXISTING CHANGING ROOMS AND THE PROPOSED LOCATION OF THE MUGA.

EXTENT OF UNDERGROUND SERVICES IN WORKS AREA TO BE CONFIRMED BY VISITING SITE AND CAT SCAN OF AREA BY CONTRACTOR.

ALL NEW SURFACE WATER SEWER, DRAINAGE CHANNELS ETC TO BE CONNECTED INTO EXISTING OPEN DRAIN

REV.	DESCRIPTION	DATE	BY
T 2	REVISIONS FOLLOWING REVIEW	08/07/26	JS
T 1	ITEMS OMITTED FOLLOWING REVIEW	15/06/26	JS
T -	FIRST ISSUE	07/03/26	JS

CLIENT	Limerick & Clare Education & Training Board, Station Road, Ennis, Co. Clare.
JOB	Proposed MUGA Pitch At Scarrif, Co, Clare
TITLE	Proposed Site Layout Plan Sheet 1 of 2

McKenna Consulting Engineers
Civil & Structural
Bank Place, Miltown Malbay, Co Clare.
Email - info@mckennaconsultingengineers.com
Tel. - 065 7085651 / 086 865 7569

SCALES	AS SHOWN	
DATE	01/02/'23	DRG. No.
DRAWN	JS	25226/CE/002/T2
CHECKED	SC	
APPROVED	TMcK	